


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	ベースダウンライト	保守率	
器具品番	DL40WW8-15W7BW-D DL40WW8-15W7BW-DLS	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
		器具効率	
器具光束	3880lm	上方向	0%
光源	-	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

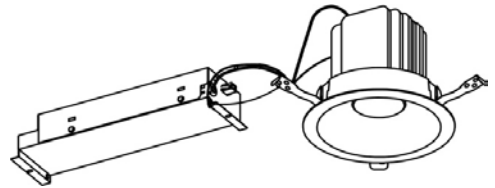

照明率表

作業面照明率(×0.01)																																									
反射率	天井	80								70								50								30								0							
		70		50		30		10		70		50		30		10		50		30		10		30		10		0													
		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0													
室 指 数	0.4	59	56	48	46	41	40	37	58	55	47	46	41	40	37	46	45	41	40	36	40	40	36	35																	
	0.6	80	74	69	65	62	60	56	78	73	68	65	61	59	56	66	64	60	59	56	60	59	55	54																	
	0.8	87	79	75	70	67	65	60	85	78	74	70	67	64	60	72	69	66	64	60	65	63	60	58																	
	1	95	85	83	77	75	72	68	92	84	82	77	75	71	67	79	75	73	70	67	72	70	66	65																	
	1.25	102	91	91	84	84	79	75	99	89	90	83	83	78	75	87	82	81	78	74	79	77	74	72																	
	1.5	105	92	95	86	87	81	77	102	91	93	85	86	81	77	89	84	84	80	76	81	79	76	74																	
	2	111	96	102	91	95	86	83	107	95	99	90	93	86	82	95	88	89	84	81	86	83	81	78																	
	2.5	115	99	107	95	101	91	88	111	98	104	94	99	90	87	99	92	95	89	86	91	87	85	83																	
	3	117	101	110	97	104	93	90	113	99	107	96	102	92	89	102	93	97	91	88	93	89	87	85																	
	4	121	103	115	99	110	97	94	116	101	111	98	107	96	93	105	96	102	94	92	97	92	90	88																	
5	123	104	118	101	114	99	97	119	103	114	100	110	98	96	108	98	105	96	94	99	94	93	90																		
7	126	106	122	104	118	102	100	121	104	118	102	115	101	99	110	100	108	99	97	102	97	96	93																		
10	128	107	125	105	122	104	103	123	105	121	104	118	103	102	113	102	111	101	100	105	99	98	95																		

配光曲線

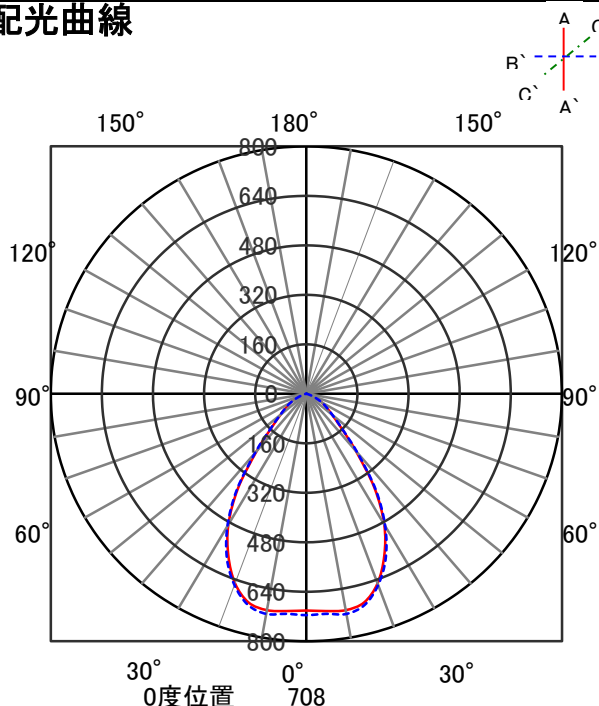

直射水平面照度

