


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDダウンライト LAシリーズ	保守率	
器具品番	DL42N8-20W8W-D DL42N8-20W8W-DLS	良	0.67
部品品名	-	中	0.63
部品品番	-	否	0.56
器具光束	3826lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

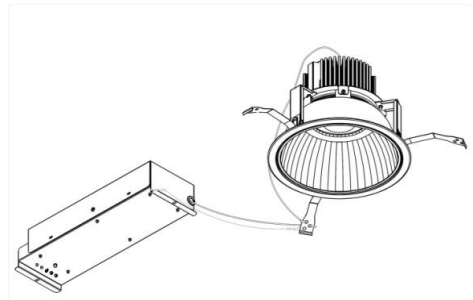

照明率表

		作業面照明率(×0.01)																									
反射率	天井	80								70				50				30				0					
		壁		70		50		30		10		70		50		30		10		50		30		10		0	
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	30	10	10	0	0
室 指 数	0.4	54	51	42	40	35	34	30	53	50	41	40	35	34	30	40	39	34	34	30	34	33	30	28	28	28	
	0.6	74	68	61	58	54	52	48	72	67	60	58	53	52	48	59	57	53	51	48	52	51	47	46	46	46	
	0.8	82	75	70	65	61	59	54	80	74	69	65	61	59	54	67	64	60	58	54	59	57	54	52	52	52	
	1	91	81	79	73	70	67	62	88	80	77	72	70	66	62	75	71	68	66	62	67	65	61	59	59	59	
	1.25	99	88	88	80	80	75	71	96	86	86	80	79	74	70	83	78	77	73	70	75	73	69	67	67	67	
	1.5	103	90	92	84	84	78	74	100	89	90	83	83	78	74	86	81	81	77	73	78	76	73	70	70	70	
	2	109	95	100	89	93	85	81	106	93	97	88	91	84	80	93	86	88	83	79	85	82	79	77	77	77	
	2.5	113	98	106	93	99	89	86	110	97	103	92	97	89	86	98	90	93	87	85	90	86	84	81	81	81	
	3	116	100	109	96	103	92	89	112	98	106	95	101	91	88	101	93	96	90	87	92	88	86	84	84	84	
	4	120	102	114	99	109	96	93	116	101	111	98	106	95	93	104	96	101	93	91	96	92	90	87	87	87	
5	122	103	117	101	113	98	96	118	102	114	100	110	97	95	107	98	104	96	94	99	94	93	90	90	90		
7	125	105	121	103	118	101	100	120	104	117	102	114	100	99	110	100	108	98	97	102	97	95	93	93	93		
10	127	106	124	105	122	103	102	122	105	120	104	118	102	101	112	101	111	100	99	104	98	98	95	95	95		

配光曲線

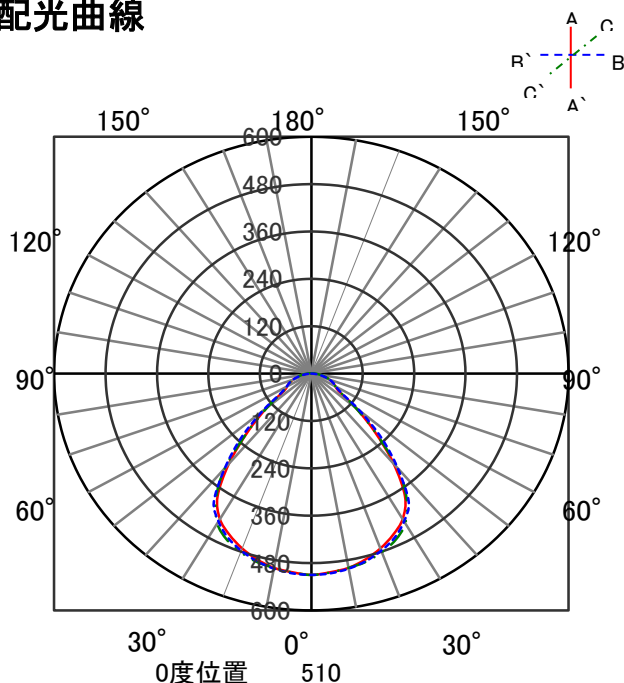

直射水平面照度

