


ECOHiLUX照明器具 配光データシート

器具品名	ベースダウンライト	保守率	
		良	0.69
器具品番	DL30N9-15A5BW-D	中	
	DL30N9-15A5BW-DLS	否	
部品品名	-	器具効率	
	-	上方向	0%
光源	-	下方向	100%
	一体型器具のため、器具光束表示	全方向	100%


意匠図

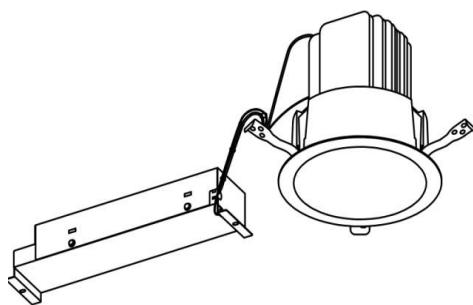

照度率表

作業面照度率(×0.01)																	0		
反射率	天井	80				70				50				30					
		壁		70	50	30	10	70		50	30	10	50		30	10	0		
		床	30	10	30	10	10	30	10	30	10	10	30	10	30	10	0		
室 指 数	0.4	63	59	52	50	46	45	41	62	58	51	50	45	45	41	49	44	41	40
	0.6	82	75	71	67	64	62	59	80	75	70	67	64	62	59	69	66	63	58
	0.8	93	84	82	77	75	72	69	91	83	81	76	75	72	68	79	75	73	68
	1	99	89	89	83	83	78	75	97	88	88	82	82	78	75	86	81	80	77
	1.25	106	94	96	88	90	84	81	103	93	95	88	89	84	81	92	86	87	83
	1.5	110	97	101	92	95	88	85	107	95	99	91	93	87	85	96	90	91	86
	2	115	100	107	96	102	93	90	112	99	105	95	100	92	90	101	94	96	91
	2.5	118	102	112	99	106	96	94	115	101	109	98	104	95	93	104	96	100	94
	3	120	103	115	101	110	98	96	117	102	112	100	108	97	95	106	98	103	96
	4	124	105	119	103	115	101	99	120	104	116	102	112	100	99	109	100	107	99
	5	125	106	122	105	118	103	102	121	105	118	104	115	102	101	111	102	109	100
	7	128	107	125	106	122	105	104	123	106	121	105	119	104	103	114	103	112	102
	10	129	108	127	108	126	107	106	125	107	123	106	122	106	105	116	104	114	104

配光曲線

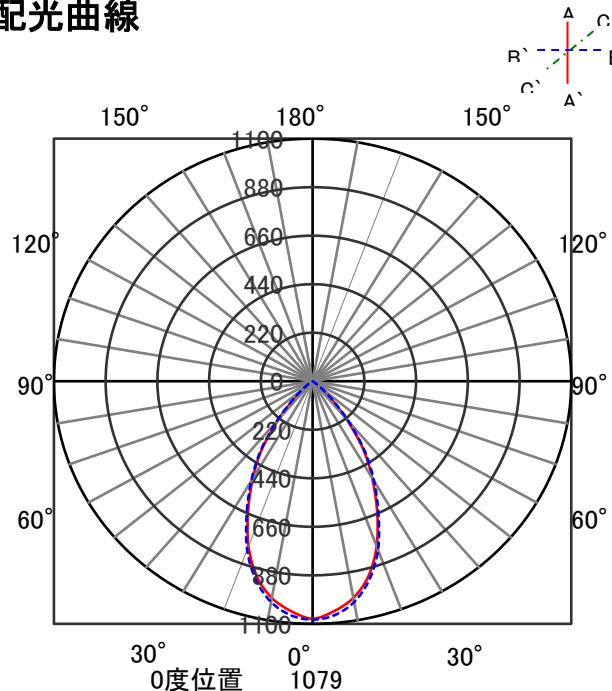

直射水平面照度

