


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	ラインルクス	保守率	
器具品番	LXBF-RTR40	良	-
部品品名	-	中	-
部品品番	-	否	-
器具光束	6425lm	器具効率	
光源	LXU160F-65D-40S	上方向	1%
光源光束	6555lm	下方向	99%
		全方向	100%

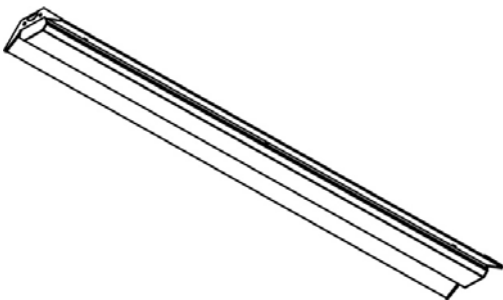

照明率表

		作業面照明率(×0.01)															
反射率	天井	80								70							
	壁	70		50		30		10		70		50		30		10	
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10
室 指 数	0.4	45	42	32	30	24	24	19	44	41	31	30	24	23	19	30	29
	0.6	62	57	47	45	39	38	32	60	56	47	44	38	37	32	45	43
	0.8	72	65	57	54	48	46	40	70	64	56	53	47	45	40	54	51
	1	81	72	66	62	57	54	48	78	71	65	61	56	53	48	62	59
	1.25	89	79	76	69	66	62	56	86	77	74	68	65	61	56	70	66
	1.5	94	83	81	74	72	67	61	91	81	79	73	71	66	61	75	71
	2	102	89	91	81	82	75	70	98	87	88	80	80	74	69	84	78
	2.5	107	93	98	86	90	81	76	103	91	95	85	88	80	76	89	83
	3	111	95	102	89	95	85	80	107	93	99	88	92	84	80	93	86
	4	115	98	108	94	102	90	86	111	96	105	92	99	89	85	98	90
	5	118	100	112	96	107	93	90	114	98	108	95	104	92	89	102	93
	7	122	102	117	100	113	97	95	117	101	113	98	109	96	94	106	96
	10	124	104	121	102	118	100	98	119	102	117	101	114	99	97	109	98

配光曲線

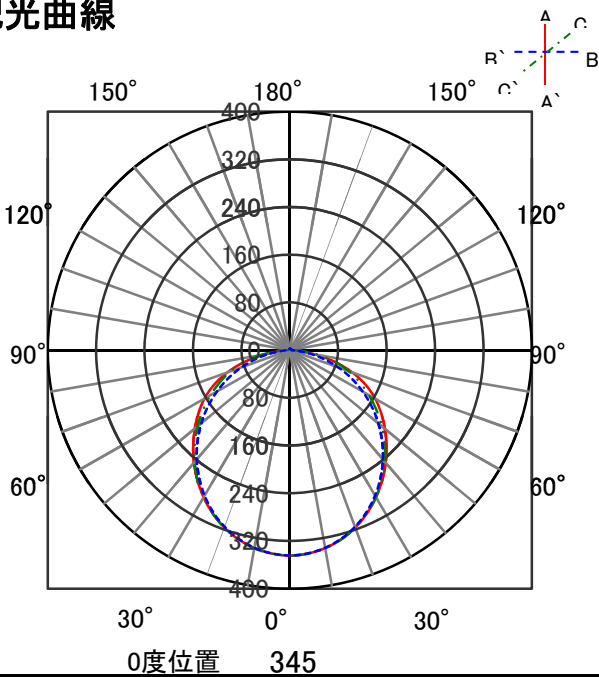

直射水平面照度

