


ECOHiLUX照明器具 配光データシート

意匠図


|       |                  |      |      |
|-------|------------------|------|------|
| 品名    | ラインルクス           | 保守率  |      |
| セット品番 | LX175F-28L-CL40W | 良    | 0.83 |
| 器具品名  | 直付型              | 中    | 0.81 |
| 器具品番  | LXBF-CL40W       | 否    | 0.77 |
| 器具光束  | 2880lm           | 器具効率 |      |
| 光源    | LXU175F-28L-40L  | 上方向  | 4%   |
| 光源光束  | 2880lm           | 下方向  | 96%  |
|       |                  | 全方向  | 100% |

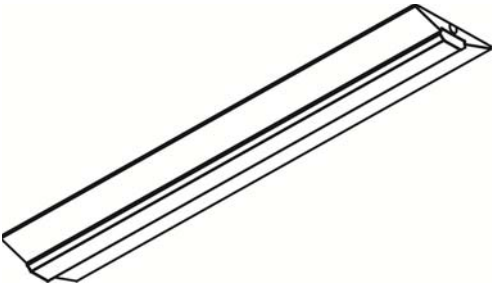

照明率表

| 作業面照明率(×0.01) |      |     |     |     |     |     |    |     |     |     |     |     |     |    |     |     |     |     |    |    |    |    |    |    |    |    |   |   |
|---------------|------|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|---|---|
| 反<br>射<br>率   | 天井   | 80  |     |     |     |     |    |     |     | 70  |     |     |     |    |     |     |     | 50  |    |    |    |    |    | 30 |    |    |   | 0 |
|               | 壁    | 70  |     | 50  |     | 30  |    | 10  |     | 70  |     | 50  |     | 30 |     | 10  |     | 50  |    | 30 |    | 10 |    | 30 |    | 10 |   | 0 |
|               | 床    | 30  | 10  | 30  | 10  | 30  | 10 | 10  | 30  | 10  | 30  | 10  | 30  | 10 | 10  | 30  | 10  | 30  | 10 | 10 | 30 | 10 | 10 | 30 | 10 | 10 | 0 |   |
| 室<br>指<br>数   | 0.4  | 45  | 42  | 31  | 30  | 24  | 23 | 19  | 44  | 41  | 31  | 30  | 24  | 23 | 19  | 30  | 29  | 23  | 23 | 19 | 22 | 22 | 18 | 16 |    |    |   |   |
|               | 0.6  | 62  | 57  | 47  | 45  | 38  | 37 | 32  | 60  | 55  | 46  | 44  | 38  | 37 | 32  | 44  | 43  | 37  | 36 | 31 | 36 | 35 | 31 | 28 |    |    |   |   |
|               | 0.8  | 72  | 65  | 57  | 53  | 47  | 45 | 39  | 69  | 63  | 55  | 52  | 46  | 45 | 39  | 53  | 50  | 45  | 44 | 38 | 43 | 43 | 38 | 35 |    |    |   |   |
|               | 1    | 80  | 72  | 66  | 61  | 56  | 53 | 47  | 77  | 70  | 64  | 60  | 55  | 52 | 47  | 61  | 58  | 53  | 51 | 46 | 51 | 50 | 45 | 42 |    |    |   |   |
|               | 1.25 | 89  | 79  | 75  | 69  | 65  | 61 | 55  | 85  | 77  | 73  | 67  | 64  | 60 | 55  | 69  | 65  | 61  | 59 | 54 | 59 | 57 | 53 | 50 |    |    |   |   |
|               | 1.5  | 94  | 83  | 81  | 73  | 71  | 66 | 60  | 90  | 81  | 78  | 72  | 70  | 65 | 60  | 74  | 69  | 67  | 64 | 59 | 64 | 62 | 58 | 54 |    |    |   |   |
|               | 2    | 102 | 88  | 90  | 81  | 81  | 74 | 69  | 97  | 86  | 87  | 79  | 79  | 73 | 68  | 82  | 76  | 75  | 71 | 67 | 72 | 69 | 65 | 62 |    |    |   |   |
|               | 2.5  | 107 | 92  | 97  | 86  | 89  | 80 | 75  | 103 | 90  | 94  | 84  | 86  | 79 | 74  | 88  | 81  | 82  | 77 | 73 | 78 | 75 | 71 | 68 |    |    |   |   |
|               | 3    | 110 | 95  | 101 | 89  | 94  | 84 | 79  | 106 | 93  | 98  | 87  | 91  | 82 | 78  | 91  | 84  | 86  | 80 | 77 | 81 | 78 | 75 | 71 |    |    |   |   |
|               | 4    | 115 | 98  | 108 | 93  | 101 | 89 | 85  | 110 | 96  | 104 | 92  | 98  | 88 | 84  | 97  | 88  | 92  | 85 | 82 | 87 | 83 | 80 | 76 |    |    |   |   |
|               | 5    | 118 | 100 | 112 | 96  | 106 | 92 | 89  | 113 | 98  | 108 | 94  | 103 | 91 | 88  | 100 | 91  | 96  | 88 | 86 | 90 | 86 | 84 | 80 |    |    |   |   |
|               | 7    | 122 | 102 | 117 | 99  | 112 | 96 | 94  | 116 | 100 | 112 | 98  | 108 | 95 | 93  | 104 | 94  | 101 | 92 | 90 | 95 | 90 | 88 | 84 |    |    |   |   |
| 10            | 124  | 104 | 121 | 102 | 117 | 100 | 98 | 119 | 102 | 116 | 100 | 113 | 98  | 96 | 107 | 97  | 105 | 95  | 94 | 98 | 92 | 91 | 87 |    |    |    |   |   |

配光曲線

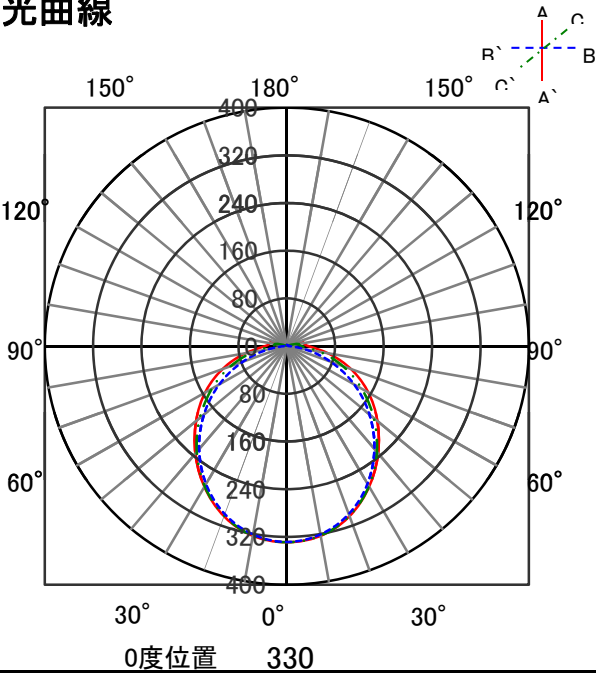

直射水平面照度

