

## ECOHiLUX照明器具 配光データシート


## 意匠図

品名	ラインルクス	保守率	
セット品番	LX175F-28WW-RTR40	良	-
器具品名	笠付型	中	-
器具品番	LXBF-RTR40	否	-
器具効率			
器具光束	2880lm	上方向	1%
光源	LXU175F-29WW-40S	下方向	99%
光源光束	2940lm	全方向	100%

## 照明率表

反射率	天井	作業面照明率(×0.01)												0	
		80			70			50			30				
		壁	70	50	30	10	70	50	30	10	50	30	10		
床	30	10	30	10	30	10	10	30	10	30	10	30	10	0	
0.4	45	42	32	30	24	24	19	44	41	31	30	24	23	19	
0.6	62	57	47	45	39	38	32	60	56	47	44	38	37	32	
0.8	72	65	57	54	48	46	40	70	64	56	53	47	45	40	
1	81	72	66	62	57	54	48	78	71	65	61	56	53	48	
1.25	89	79	76	69	66	62	56	86	77	74	68	65	61	55	
1.5	94	83	81	74	72	67	61	91	81	79	73	71	66	60	
2	102	89	91	81	82	75	70	98	87	88	80	74	69	84	
2.5	107	93	98	86	90	81	76	103	91	95	85	88	80	76	
3	111	95	102	89	95	85	80	107	93	99	88	92	84	80	
4	115	98	108	94	102	90	86	111	96	105	92	99	85	87	
5	118	100	112	96	107	93	90	114	98	108	95	104	92	89	
7	122	102	117	100	113	97	95	117	101	113	98	109	96	106	
10	124	104	121	102	118	100	98	119	102	117	101	114	99	109	

## 配光曲線

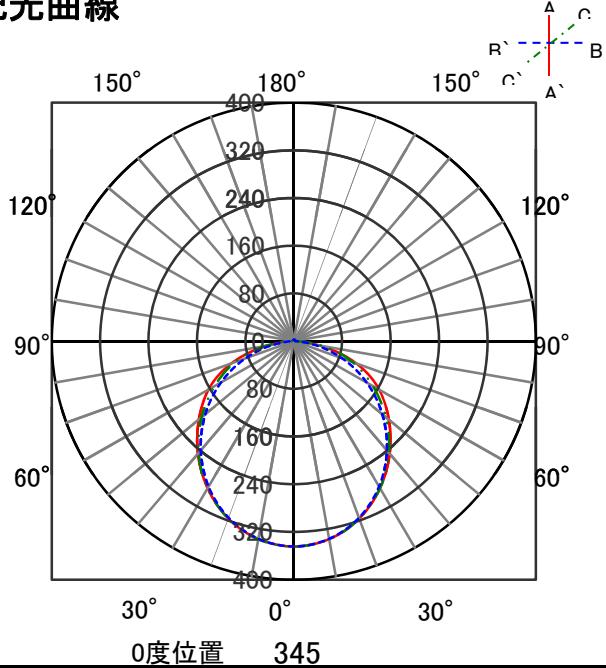

## 直射水平面照度

