


ECOHiLUX照明器具 配光データシート

意匠図


品名	ラインルクス	保守率	
セット品番	LX160F-47D-UK40-W240-D	良	0.81
		中	0.77
器具品名	埋込型	否	0.68
器具品番	LXBF-UK40-W240-D	器具効率	
器具光束	4790lm	上方向	0%
光源	LXU160F-49D-40S-D	下方向	100%
光源光束	4940lm	全方向	100%

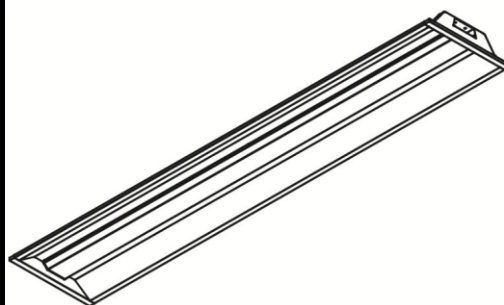

照明率表

		作業面照明率(×0.01)																			
反射率	天井	80								70								50			
		70	50	30	10	70	50	30	10	70	50	30	10	50	30	10	30	10	30	10	0
室 指 数	壁	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
	0.4	45	43	32	31	25	24	20	44	42	32	30	24	24	20	31	30	24	24	19	24
	0.6	63	58	48	46	39	38	33	61	56	47	45	39	38	33	46	44	38	37	33	38
	0.8	73	66	58	54	48	46	41	71	65	57	54	48	46	41	55	52	47	45	40	46
	1	82	73	67	62	57	55	49	79	72	66	62	57	54	48	63	60	55	53	48	54
	1.25	90	80	77	70	67	63	57	87	78	75	69	66	62	57	72	68	64	61	56	62
	1.5	95	84	82	75	73	68	62	92	82	80	74	72	67	62	77	72	69	66	61	67
	2	103	90	92	82	83	76	71	99	88	89	81	82	75	70	85	79	78	74	70	76
	2.5	108	94	99	87	91	82	77	105	92	96	86	89	81	77	91	84	85	80	76	82
	3	112	96	103	90	96	86	81	108	94	100	89	94	85	81	95	87	89	83	80	86
	4	116	99	109	95	103	91	87	112	98	106	94	101	90	87	100	91	95	88	85	91
	5	119	101	113	97	108	94	91	115	100	110	96	105	93	91	103	94	100	92	89	94
	7	123	103	118	101	114	98	96	118	102	114	99	111	97	95	107	97	104	95	93	99
	10	125	105	122	103	119	101	100	121	103	118	102	115	100	99	110	100	108	98	97	102

配光曲線

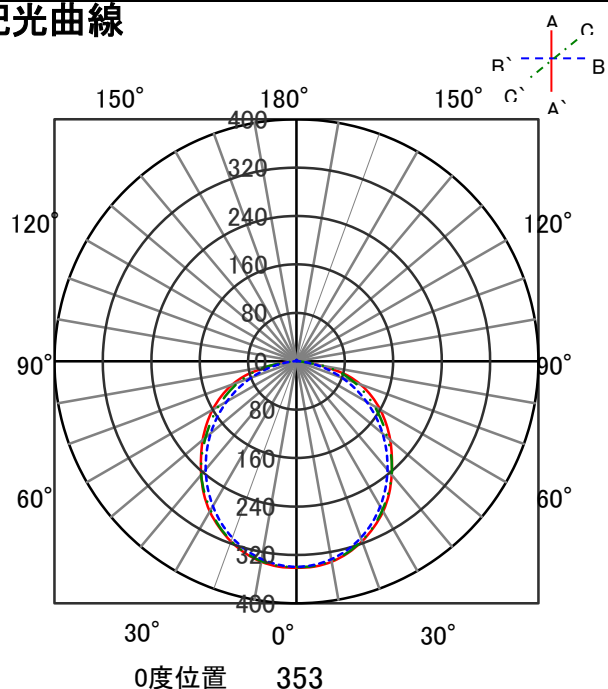

直射水平面照度

