


ECOHiLUX照明器具 配光データシート

意匠図

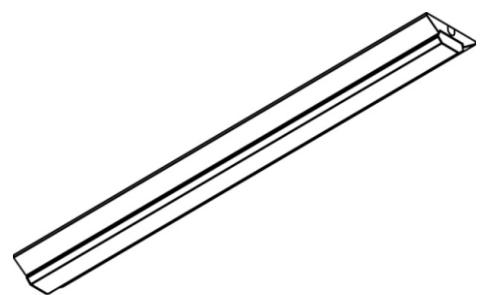

| 品名 | ライフルクス | 保守率 | |
|-------|---------------------|-----|------|
| | | 良 | 0.83 |
| セット品番 | LX170FC-62L-CL40-DA | 中 | 0.81 |
| 器具品名 | 直付型 | 否 | 0.77 |
| 器具品番 | LXBF-CL40-D | | 器具効率 |
| 器具光束 | 6210lm | 上方向 | 6% |
| 光源 | LXU170FC-62L-40L-DA | 下方向 | 94% |
| 光源光束 | 6210lm | 全方向 | 100% |

照明率表

| 反射率 | 天井 | 作業面照明率(×0.01) | | | | | | | | | | | | 30 | | |
|-------------|------|---------------|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|----|----|----|
| | | 80 | | | | 70 | | | | 50 | | | | 0 | | |
| | | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 30 | 10 | 0 | 30 | 10 | |
| 室 指 数 | 壁 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | |
| | 床 | 45 | 42 | 31 | 30 | 24 | 23 | 19 | 43 | 41 | 30 | 29 | 23 | 18 | 29 | 22 |
| | 0.4 | 61 | 57 | 47 | 44 | 38 | 36 | 31 | 59 | 55 | 45 | 43 | 37 | 36 | 35 | 30 |
| | 0.6 | 71 | 65 | 56 | 53 | 46 | 45 | 39 | 69 | 63 | 55 | 52 | 46 | 44 | 43 | 37 |
| | 0.8 | 80 | 72 | 65 | 61 | 55 | 52 | 46 | 77 | 70 | 63 | 59 | 54 | 52 | 50 | 45 |
| | 1 | 88 | 78 | 74 | 68 | 64 | 61 | 54 | 85 | 76 | 72 | 67 | 63 | 60 | 58 | 53 |
| | 1.25 | 94 | 82 | 80 | 73 | 71 | 66 | 60 | 90 | 80 | 78 | 71 | 69 | 64 | 59 | 57 |
| | 1.5 | 101 | 88 | 90 | 80 | 81 | 74 | 68 | 97 | 86 | 87 | 79 | 78 | 72 | 67 | 65 |
| | 2 | 107 | 92 | 97 | 85 | 88 | 79 | 74 | 102 | 90 | 93 | 84 | 86 | 78 | 73 | 72 |
| | 2.5 | 110 | 95 | 101 | 89 | 93 | 83 | 79 | 105 | 92 | 97 | 87 | 90 | 82 | 78 | 75 |
| | 3 | 115 | 98 | 107 | 93 | 101 | 89 | 85 | 110 | 96 | 103 | 91 | 97 | 87 | 83 | 81 |
| | 4 | 118 | 100 | 112 | 96 | 106 | 92 | 89 | 113 | 98 | 107 | 94 | 102 | 91 | 87 | 85 |
| | 5 | 122 | 102 | 117 | 99 | 112 | 96 | 94 | 116 | 100 | 112 | 97 | 108 | 95 | 92 | 89 |
| | 7 | 124 | 104 | 121 | 102 | 117 | 100 | 98 | 119 | 102 | 116 | 100 | 113 | 98 | 96 | 95 |
| | 10 | 124 | 104 | 121 | 102 | 117 | 100 | 98 | 119 | 102 | 116 | 100 | 113 | 98 | 96 | 95 |

配光曲線

直射水平面照度

