


ECOHiLUX照明器具 配光データシート

| | | | |
|-------|----------------------|------|------|
| 品名 | ラインルクス | 保守率 | |
| セット品番 | LX170FC-47D-RTR40-DA | 良 | 0.81 |
| 器具品名 | 笠付型 | 中 | 0.77 |
| 器具品番 | LXBF-RTR40-D | 否 | 0.68 |
| 器具光束 | 4755lm | 器具効率 | |
| 光源 | LXU170FC-48D-40S-DA | 上方向 | 1% |
| 光源光束 | 4850lm | 下方向 | 99% |
| | | 全方向 | 100% |


意匠図

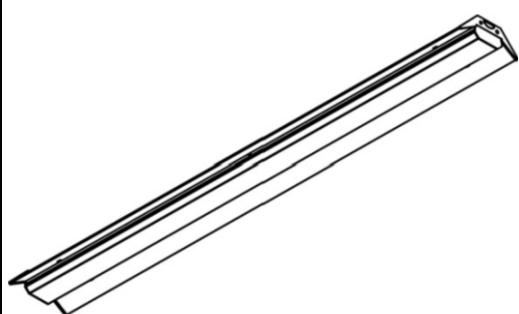

照度率表

| 作業面照度率(×0.01) | | | | | | | | | | | | | | | | 0 | | | | | | | | |
|---------------|------|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|----|----|-----|----|-----|----|----|-----|----|----|----|
| 反射率 | 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | | | | | | | | |
| | 壁 | 70 | | 50 | | 30 | | 10 | | 70 | | 50 | | 30 | | 10 | 0 | | | | | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 10 | 0 | | | | | | | |
| 室 指 数 | 0.4 | 45 | 42 | 32 | 30 | 24 | 24 | 19 | 44 | 41 | 31 | 30 | 24 | 23 | 19 | 23 | 19 | 17 | | | | | | |
| | 0.6 | 62 | 57 | 47 | 45 | 39 | 38 | 32 | 60 | 56 | 47 | 44 | 38 | 37 | 32 | 45 | 38 | 37 | 32 | 36 | 32 | 30 | | |
| | 0.8 | 72 | 65 | 57 | 54 | 48 | 46 | 40 | 70 | 64 | 56 | 53 | 47 | 45 | 40 | 54 | 51 | 46 | 45 | 39 | 45 | 44 | 39 | 37 |
| | 1 | 81 | 72 | 66 | 62 | 57 | 54 | 48 | 78 | 71 | 65 | 61 | 56 | 53 | 48 | 62 | 59 | 54 | 52 | 47 | 53 | 51 | 47 | 44 |
| | 1.25 | 89 | 79 | 76 | 69 | 66 | 62 | 56 | 86 | 77 | 74 | 68 | 65 | 61 | 56 | 70 | 66 | 63 | 60 | 55 | 61 | 59 | 55 | 52 |
| | 1.5 | 94 | 83 | 81 | 74 | 72 | 67 | 61 | 91 | 81 | 79 | 73 | 71 | 66 | 61 | 75 | 71 | 68 | 65 | 60 | 66 | 64 | 60 | 57 |
| | 2 | 102 | 89 | 91 | 81 | 82 | 75 | 70 | 98 | 87 | 88 | 80 | 80 | 74 | 69 | 84 | 78 | 77 | 73 | 68 | 74 | 71 | 67 | 65 |
| | 2.5 | 107 | 93 | 98 | 86 | 90 | 81 | 76 | 103 | 91 | 95 | 85 | 88 | 80 | 76 | 89 | 83 | 84 | 78 | 74 | 80 | 77 | 73 | 71 |
| | 3 | 111 | 95 | 102 | 89 | 95 | 85 | 80 | 107 | 93 | 99 | 88 | 92 | 84 | 80 | 93 | 86 | 88 | 82 | 78 | 84 | 80 | 77 | 74 |
| | 4 | 115 | 98 | 108 | 94 | 102 | 90 | 86 | 111 | 96 | 105 | 92 | 99 | 89 | 85 | 98 | 90 | 94 | 87 | 84 | 89 | 85 | 83 | 80 |
| | 5 | 118 | 100 | 112 | 96 | 107 | 93 | 90 | 114 | 98 | 108 | 95 | 104 | 92 | 89 | 102 | 93 | 98 | 90 | 88 | 93 | 88 | 86 | 83 |
| | 7 | 122 | 102 | 117 | 100 | 113 | 97 | 95 | 117 | 101 | 113 | 98 | 109 | 96 | 94 | 106 | 96 | 103 | 94 | 92 | 97 | 92 | 90 | 87 |
| | 10 | 124 | 104 | 121 | 102 | 118 | 100 | 98 | 119 | 102 | 117 | 101 | 114 | 99 | 97 | 109 | 98 | 107 | 97 | 95 | 100 | 95 | 93 | 90 |

配光曲線

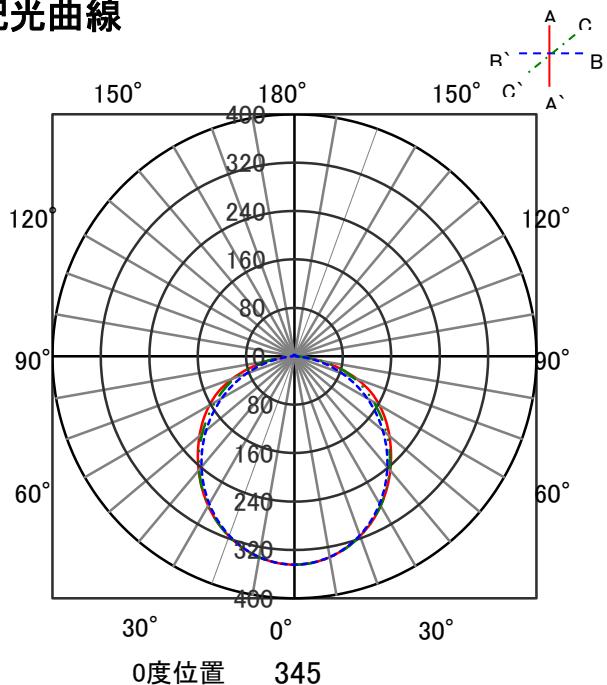

直射水平面照度

