


## ECOHiLUX照明器具 配光データシート

意匠図


| 品名    | ラインルクス            | 保守率  |      |
|-------|-------------------|------|------|
| セット品番 | LX190F-45L-TR40-D | 良    | 0.83 |
| 器具品名  | トラフ型              | 中    | 0.81 |
| 器具品番  | LXBF-TR40-D       | 否    | 0.77 |
| 器具光束  | 4590lm            | 器具効率 |      |
| 光源    | LXU190F-45L-40S-D | 上方向  | 4%   |
| 光源光束  | 4590lm            | 下方向  | 96%  |
|       |                   | 全方向  | 100% |

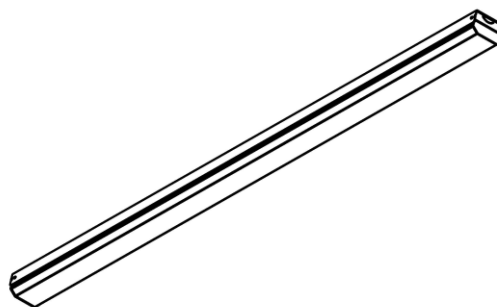

## 照明率表

| 作業面照明率(×0.01) |      |     |     |     |     |     |    |     |     |     |     |     |     |    |     |     |     |    |    |    |    |    |    |    |    |    |   |   |
|---------------|------|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|----|----|----|----|----|----|----|----|----|---|---|
| 反<br>射<br>率   | 天井   | 80  |     |     |     |     |    |     |     | 70  |     |     |     |    |     |     |     | 50 |    |    |    |    |    | 30 |    |    |   | 0 |
|               | 壁    | 70  |     | 50  |     | 30  |    | 10  |     | 70  |     | 50  |     | 30 |     | 10  |     | 50 |    | 30 |    | 10 |    | 30 |    | 10 |   | 0 |
|               | 床    | 30  | 10  | 30  | 10  | 30  | 10 | 10  | 30  | 10  | 30  | 10  | 30  | 10 | 10  | 30  | 10  | 30 | 10 | 10 | 30 | 10 | 10 | 30 | 10 | 10 | 0 |   |
| 室<br>指<br>数   | 0.4  | 46  | 43  | 32  | 31  | 25  | 24 | 20  | 44  | 42  | 32  | 31  | 25  | 24 | 20  | 31  | 30  | 24 | 24 | 19 | 23 | 23 | 19 | 17 |    |    |   |   |
|               | 0.6  | 63  | 58  | 48  | 46  | 40  | 39 | 33  | 61  | 57  | 48  | 45  | 39  | 38 | 33  | 46  | 44  | 38 | 37 | 33 | 37 | 37 | 32 | 30 |    |    |   |   |
|               | 0.8  | 73  | 66  | 58  | 55  | 49  | 47 | 41  | 71  | 65  | 57  | 54  | 48  | 46 | 41  | 54  | 52  | 47 | 45 | 40 | 45 | 44 | 40 | 37 |    |    |   |   |
|               | 1    | 82  | 74  | 67  | 63  | 58  | 55 | 49  | 79  | 72  | 66  | 62  | 57  | 54 | 49  | 63  | 59  | 55 | 53 | 48 | 53 | 52 | 47 | 44 |    |    |   |   |
|               | 1.25 | 90  | 80  | 77  | 70  | 67  | 63 | 57  | 87  | 78  | 75  | 69  | 66  | 62 | 57  | 71  | 67  | 63 | 61 | 56 | 61 | 59 | 55 | 52 |    |    |   |   |
|               | 1.5  | 95  | 84  | 83  | 75  | 73  | 68 | 62  | 92  | 82  | 80  | 74  | 72  | 67 | 62  | 76  | 71  | 69 | 65 | 61 | 66 | 64 | 60 | 57 |    |    |   |   |
|               | 2    | 103 | 90  | 92  | 82  | 83  | 76 | 71  | 99  | 88  | 89  | 81  | 81  | 75 | 70  | 84  | 78  | 77 | 73 | 69 | 74 | 71 | 67 | 64 |    |    |   |   |
|               | 2.5  | 108 | 94  | 99  | 87  | 91  | 82 | 77  | 104 | 92  | 95  | 86  | 88  | 81 | 76  | 90  | 83  | 84 | 79 | 75 | 80 | 77 | 73 | 70 |    |    |   |   |
|               | 3    | 112 | 96  | 103 | 90  | 96  | 85 | 81  | 107 | 94  | 100 | 89  | 93  | 84 | 80  | 93  | 86  | 88 | 82 | 79 | 83 | 80 | 77 | 73 |    |    |   |   |
|               | 4    | 116 | 99  | 109 | 95  | 103 | 91 | 87  | 112 | 97  | 105 | 93  | 100 | 89 | 86  | 98  | 90  | 94 | 87 | 84 | 89 | 84 | 82 | 78 |    |    |   |   |
|               | 5    | 119 | 101 | 113 | 97  | 108 | 94 | 91  | 114 | 99  | 109 | 96  | 104 | 93 | 90  | 102 | 93  | 98 | 90 | 88 | 92 | 88 | 85 | 82 |    |    |   |   |
| 7             | 123  | 103 | 118 | 100 | 114 | 98  | 95 | 118 | 101 | 114 | 99  | 110 | 96  | 94 | 105 | 96  | 103 | 94 | 92 | 96 | 91 | 89 | 86 |    |    |    |   |   |
| 10            | 125  | 105 | 122 | 103 | 119 | 101 | 99 | 120 | 103 | 117 | 101 | 114 | 99  | 98 | 108 | 98  | 106 | 97 | 95 | 99 | 94 | 93 | 89 |    |    |    |   |   |

## 配光曲線

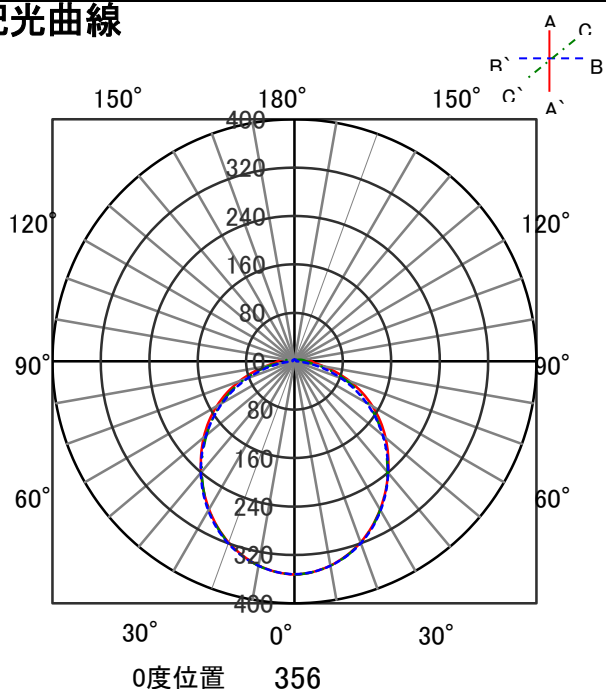

## 直射水平面照度

