

ECOHiLUX照明器具 配光データシート

意匠図


品名	ラインルクス	保守率	
セット品番	LX190F-49N-WW110T-D	良	0.69
		中	0.67
器具品名	ウォールウォッシャー型	否	0.63
器具品番	LXBF-WW110T-D	器具効率	
器具光束	4900lm	上方向	0%
光源	LXU190F-50N-110T-D	下方向	98%
光源光束	5000lm	全方向	98%



照明率表

作業面照明率(×0.01)																																				
反 射 率	天井	80								70								50						30				0								
	壁	70				50				30				10				50				30				10				30				10		0
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0						
室 指 数	0.4	43	40	29	28	22	21	17	41	39	29	28	21	21	16	27	27	21	20	16	20	20	16	20	20	16	14									
	0.6	59	54	44	42	35	34	28	57	53	43	41	34	33	28	41	39	33	32	27	32	32	27	32	32	27	25									
	0.8	69	62	53	50	43	41	35	66	60	52	49	42	41	35	49	47	41	40	34	39	39	34	39	39	34	31									
	1	77	69	62	57	51	49	42	74	67	60	56	50	48	42	57	54	49	47	41	47	46	41	47	46	41	38									
	1.25	85	76	71	65	60	57	50	82	73	69	63	59	56	50	65	61	57	54	49	54	53	48	54	53	48	45									
	1.5	90	80	76	69	66	62	55	87	77	74	68	65	61	55	70	65	62	59	54	59	57	52	59	57	52	49									
	2	98	85	86	77	76	70	64	94	83	83	75	74	68	63	78	72	70	66	61	67	64	60	67	64	60	57									
	2.5	104	89	93	82	84	75	70	99	87	89	80	81	74	69	83	77	77	72	68	73	70	66	73	70	66	62									
	3	107	92	97	85	89	79	74	103	90	94	84	86	78	73	87	80	81	76	72	77	73	70	77	73	70	66									
	4	112	95	104	90	97	85	80	107	93	100	88	93	84	79	93	85	88	81	77	82	78	75	82	78	75	71									
	5	115	97	108	93	102	89	85	110	95	104	91	98	87	84	96	88	92	84	81	86	82	79	86	82	79	75									
	7	119	100	113	96	108	93	90	114	98	109	95	104	92	89	101	91	97	89	86	91	86	84	88	84	84	80									
10	122	102	118	99	114	97	94	117	100	113	98	109	95	93	104	94	102	92	90	95	89	88	88	84	84	84										

配光曲線

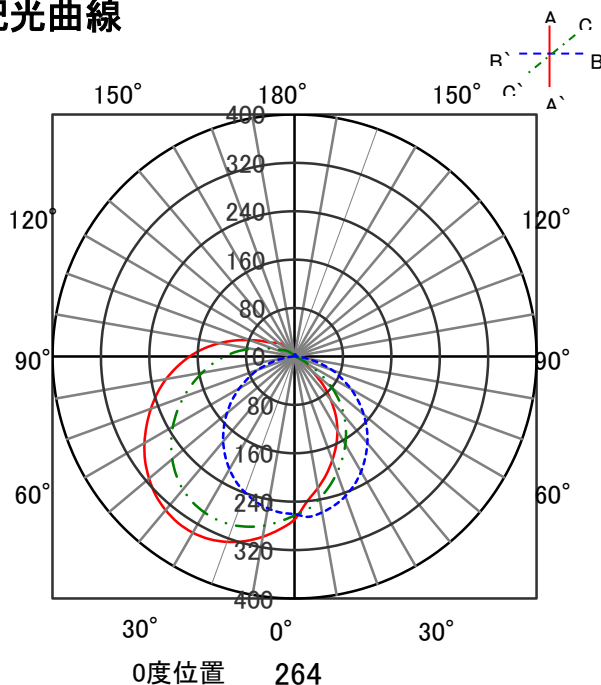

直射水平面照度

