


# ECOHiLUX照明器具 配光データシート

## 意匠図

|       |                        |      |      |
|-------|------------------------|------|------|
| 品名    | ラインルクス                 | 保守率  |      |
| セット品番 | LX190F-47W-KK40-W250-D | 良    | 0.67 |
| 器具品名  | 直付下面開放型                | 中    | 0.63 |
| 器具品番  | LXBF-KK40-W250-D       | 否    | 0.56 |
| 器具光束  | 4755lm                 | 器具効率 |      |
| 光源    | LXU190F-48W-40S-D      | 上方向  | 1%   |
| 光源光束  | 4850lm                 | 下方向  | 99%  |
|       |                        | 全方向  | 100% |

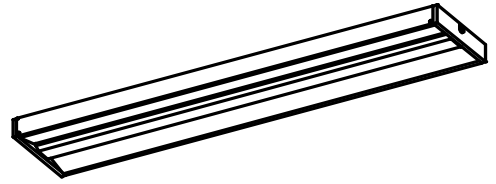


## 照明率表

作業面照明率(×0.01)

| 反(射率) | 天井   | 80  |     |     |     |     |     |    |     | 70  |     |     |     |     |    |     |    | 50  |    |    |     | 30 |    |     |    | 0  |    |
|-------|------|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|----|-----|----|-----|----|----|-----|----|----|-----|----|----|----|
|       |      | 壁   | 70  |     | 50  |     | 30  |    | 10  |     | 70  |     | 50  |     | 30 |     | 10 |     | 50 |    | 30  |    | 10 |     | 0  |    |    |
| 床     | 30   | 10  | 30  | 10  | 30  | 10  | 30  | 10 | 30  | 10  | 30  | 10  | 30  | 10  | 30 | 10  | 30 | 10  | 30 | 10 | 30  | 10 | 30 | 10  | 30 | 10 | 0  |
| 室     | 0.4  | 45  | 42  | 32  | 30  | 24  | 23  | 19 | 44  | 41  | 31  | 30  | 24  | 23  | 19 | 30  | 29 | 23  | 23 | 19 | 23  | 23 | 19 | 23  | 23 | 19 | 17 |
| 指     | 0.6  | 62  | 57  | 47  | 45  | 38  | 37  | 32 | 60  | 56  | 47  | 44  | 38  | 37  | 32 | 45  | 43 | 37  | 36 | 31 | 36  | 36 | 31 | 36  | 36 | 31 | 29 |
| 数     | 0.8  | 72  | 66  | 57  | 54  | 47  | 45  | 39 | 70  | 64  | 56  | 53  | 47  | 45  | 39 | 54  | 51 | 46  | 44 | 39 | 44  | 43 | 39 | 44  | 43 | 39 | 36 |
|       | 1    | 81  | 73  | 66  | 62  | 56  | 53  | 47 | 78  | 71  | 65  | 61  | 55  | 53  | 47 | 62  | 59 | 54  | 52 | 47 | 52  | 51 | 46 | 52  | 51 | 46 | 44 |
|       | 1.25 | 89  | 80  | 76  | 69  | 66  | 62  | 56 | 86  | 78  | 74  | 68  | 65  | 61  | 55 | 70  | 66 | 63  | 60 | 55 | 61  | 59 | 54 | 61  | 59 | 54 | 52 |
|       | 1.5  | 95  | 84  | 82  | 74  | 72  | 67  | 61 | 91  | 82  | 80  | 73  | 71  | 66  | 61 | 76  | 71 | 68  | 65 | 60 | 66  | 64 | 59 | 66  | 64 | 59 | 56 |
|       | 2    | 103 | 89  | 91  | 81  | 82  | 75  | 70 | 99  | 88  | 89  | 80  | 80  | 74  | 69 | 84  | 78 | 77  | 73 | 68 | 74  | 71 | 67 | 74  | 71 | 67 | 64 |
|       | 2.5  | 108 | 93  | 98  | 87  | 90  | 81  | 76 | 104 | 92  | 95  | 85  | 88  | 80  | 75 | 90  | 83 | 84  | 78 | 74 | 80  | 77 | 73 | 77  | 73 | 70 | 70 |
|       | 3    | 112 | 96  | 103 | 90  | 95  | 85  | 80 | 107 | 94  | 99  | 89  | 93  | 84  | 80 | 94  | 86 | 88  | 82 | 78 | 84  | 80 | 77 | 84  | 80 | 77 | 74 |
|       | 4    | 116 | 99  | 109 | 94  | 103 | 90  | 86 | 112 | 97  | 105 | 93  | 100 | 89  | 86 | 99  | 91 | 94  | 87 | 84 | 90  | 85 | 83 | 90  | 85 | 83 | 80 |
|       | 5    | 119 | 101 | 113 | 97  | 108 | 94  | 90 | 115 | 99  | 109 | 96  | 104 | 93  | 90 | 102 | 93 | 99  | 91 | 88 | 93  | 89 | 86 | 93  | 89 | 86 | 83 |
|       | 7    | 123 | 103 | 118 | 101 | 114 | 98  | 95 | 118 | 102 | 114 | 99  | 110 | 97  | 94 | 107 | 97 | 104 | 95 | 93 | 98  | 92 | 91 | 98  | 92 | 91 | 88 |
|       | 10   | 126 | 105 | 122 | 103 | 119 | 101 | 99 | 121 | 104 | 118 | 102 | 115 | 100 | 98 | 110 | 99 | 108 | 98 | 96 | 101 | 95 | 94 | 101 | 95 | 94 | 91 |

## 配光曲線

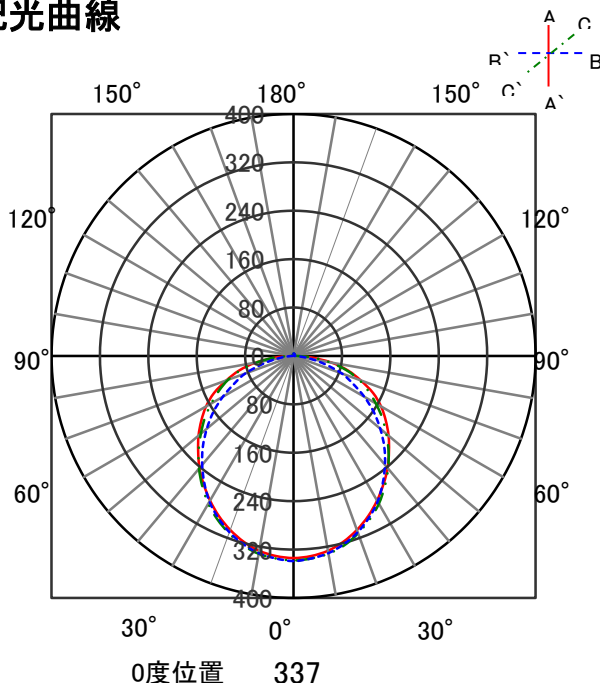

## 直射水平面照度

