


# ECOHiLUX照明器具 配光データシート

意匠図

品名	ラインルクス	保守率	
セット品番	LX190F-56L-KK110T-W250-D	良	0.67
器具品名	直付下面開放型	中	0.63
器具品番	LXBF-KK110T-W250-D	否	0.56
器具光束	5645lm	器具効率	
光源	LXU190F-57L-110T-D	上方向	1%
光源光束	5760lm	下方向	99%
		全方向	100%

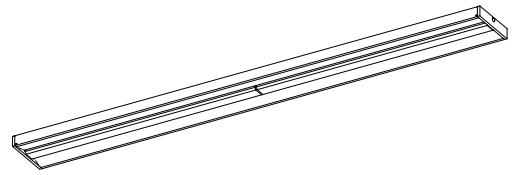


## 照明率表

作業面照明率(×0.01)

反射率	天井	80								70								50								30								0							
		壁	70		50		30		10		壁	70		50		30		10		壁	50		30		10		壁	30		10		壁	0		0						
0.4	45	42	32	30	24	23	19	44	41	31	30	24	23	19	30	29	23	23	19	23	23	19	23	23	19	17	17	17	17	17	17	17	17								
0.6	62	57	47	45	38	37	32	60	56	47	44	38	37	32	45	43	37	36	31	36	36	31	36	36	31	29	29	29	29	29	29	29	29								
0.8	72	66	57	54	47	45	39	70	64	56	53	47	45	39	54	51	46	44	39	44	43	39	44	43	39	36	36	36	36	36	36	36	36								
1	81	73	66	62	56	53	47	78	71	65	61	55	53	47	62	59	54	52	47	52	51	46	52	51	46	44	44	44	44	44	44	44	44								
1.25	89	80	76	69	66	62	56	86	78	74	68	65	61	55	70	66	63	60	55	61	59	54	61	59	54	52	52	52	52	52	52	52	52								
1.5	95	84	82	74	72	67	61	91	82	80	73	71	66	61	76	71	68	65	60	66	64	59	66	64	59	56	56	56	56	56	56	56	56	56							
2	103	89	91	81	82	75	70	99	88	89	80	80	74	69	84	78	77	73	68	74	71	67	74	71	67	64	64	64	64	64	64	64	64	64							
2.5	108	93	98	87	90	81	76	104	92	95	85	88	80	75	90	83	84	78	74	80	77	73	80	77	73	70	70	70	70	70	70	70	70	70							
3	112	96	103	90	95	85	80	107	94	99	89	93	84	80	94	86	88	82	78	84	80	77	84	80	77	74	74	74	74	74	74	74	74	74							
4	116	99	109	94	103	90	86	112	97	105	93	100	89	86	99	91	94	87	84	90	85	83	90	85	83	80	80	80	80	80	80	80	80	80	80						
5	119	101	113	97	108	94	90	115	99	109	96	104	93	90	102	93	99	91	88	93	89	86	93	89	86	83	83	83	83	83	83	83	83	83	83						
7	123	103	118	101	114	98	95	118	102	114	99	110	97	94	107	97	104	95	93	98	92	91	98	92	91	88	88	88	88	88	88	88	88	88	88						
10	126	105	122	103	119	101	99	121	104	118	102	115	100	98	110	99	108	98	96	101	95	94	101	95	94	91	91	91	91	91	91	91	91	91	91						

## 配光曲線

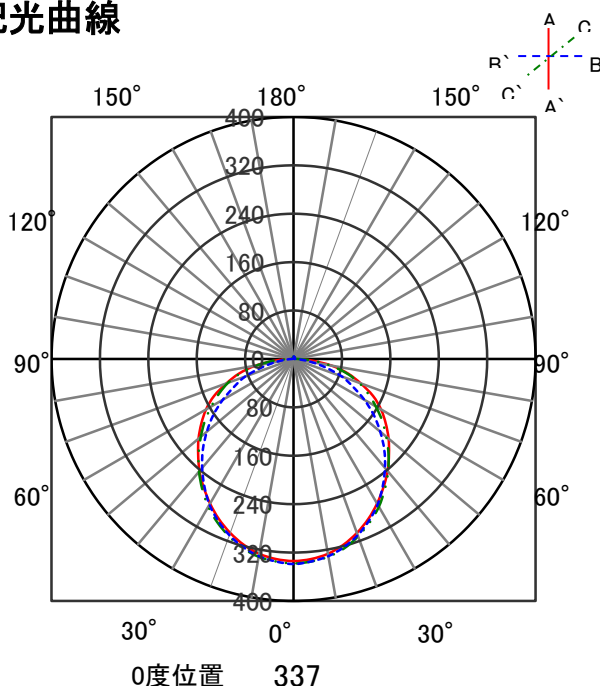

## 直射水平面照度

