


ECOHiLUX照明器具 配光データシート

品名	ラインルクス	保守率	
		良	0.83
セット品番	LX170F-69N-TR40	中	0.81
器具品名	トラフ型	否	0.77
器具品番	LXBF-TR40	器具効率	
器具光束	6900lm	上方向	4%
光源	LXU170F-69N-40S	下方向	96%
光源光束	6900lm	全方向	100%


意匠図

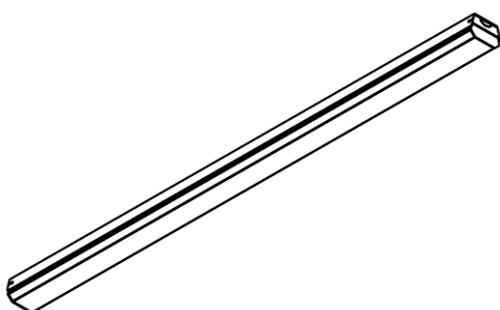

照明率表

反射率	天井	作業面照明率(×0.01)														30	0		
		80				70				50				30					
		壁	70	50	30	10	70	50	30	10	50	30	10	50	30				
室 指 数	0.4	46	43	32	31	25	24	20	44	42	32	31	25	24	20	31	30	24 24 19 23 23 19 17	
	0.6	63	58	48	46	40	39	33	61	57	48	45	39	38	33	46	44	38 37 33 37 37 32 30	
	0.8	73	66	58	55	49	47	41	71	65	57	54	48	46	41	54	52	47 45 40 45 44 40 37	
	1	82	74	67	63	58	55	49	79	72	66	62	57	54	49	63	59	55 53 48 53 52 47 44	
	1.25	90	80	77	70	67	63	57	87	78	75	69	66	62	57	71	67	63 61 56 61 59 55 52	
	1.5	95	84	83	75	73	68	62	92	82	80	74	72	67	62	76	71	69 65 61 66 64 60 57	
	2	103	90	92	82	83	76	71	99	88	89	81	81	75	70	84	78	77 73 69 74 71 67 64	
	2.5	108	94	99	87	91	82	77	104	92	95	86	88	81	76	90	83	84 79 75 80 77 73 70	
	3	112	96	103	90	96	85	81	107	94	100	89	93	84	80	93	86	88 82 79 83 80 77 73	
	4	116	99	109	95	103	91	87	112	97	105	93	100	89	86	98	90	94 87 84 89 84 82 78	
	5	119	101	113	97	108	94	91	114	99	109	96	104	93	90	102	93	98 90 88 92 88 85 82	
	7	123	103	118	100	114	98	95	118	101	114	99	110	96	94	105	96	103 94 92 96 91 89 86	
	10	125	105	122	103	119	101	99	120	103	117	101	114	99	98	108	98	106 97 95 99 94 93 89	

配光曲線

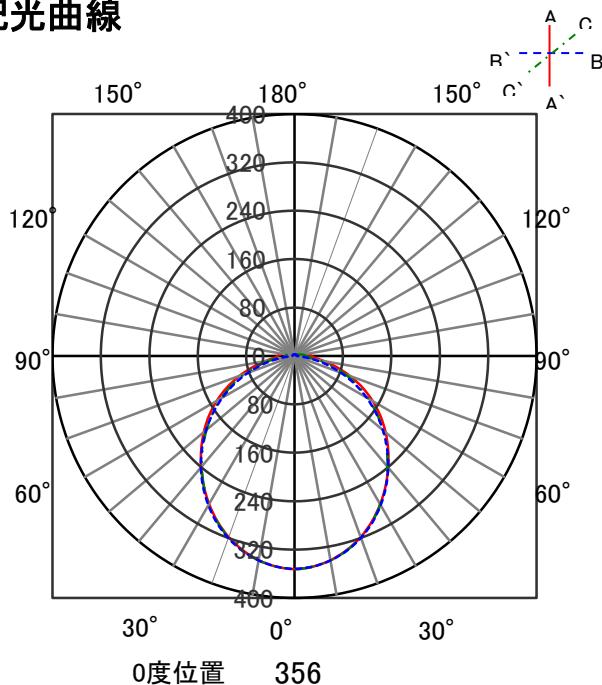

直射水平面照度

