

## ECOHiLUX照明器具 配光データシート

意匠図


| 品名    | ラインルクス          | 保守率  |      |
|-------|-----------------|------|------|
| セット品番 | LX170F-32N-WW40 | 良    | 0.69 |
| 器具品名  | ウォールウォッシャー型     | 中    | 0.67 |
| 器具品番  | LXBF-WW40       | 否    | 0.63 |
| 器具光束  | 3235lm          | 器具効率 |      |
| 光源    | LXU170F-33N-40S | 上方向  | 0%   |
| 光源光束  | 3300lm          | 下方向  | 98%  |
|       |                 | 全方向  | 98%  |



## 照明率表

| 作業面照明率(×0.01)       |      |     |     |     |     |     |    |     |     |     |     |     |    |    |     |    |     |    |    |    |    |    |    |    |   |
|---------------------|------|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|----|----|-----|----|-----|----|----|----|----|----|----|----|---|
| 反<br>射<br>率         | 天井   | 80  |     |     |     |     |    |     | 70  |     |     |     |    |    |     | 50 |     |    |    |    |    | 30 |    |    | 0 |
|                     | 壁    | 70  |     | 50  |     | 30  |    | 10  | 70  |     | 50  |     | 30 |    | 10  | 50 |     | 30 |    | 10 | 30 |    | 10 | 0  |   |
|                     | 床    | 30  | 10  | 30  | 10  | 30  | 10 | 10  | 30  | 10  | 30  | 10  | 30 | 10 | 10  | 30 | 10  | 30 | 10 | 10 | 30 | 10 | 10 | 0  |   |
| 室<br><br>指<br><br>数 | 0.4  | 43  | 40  | 29  | 28  | 22  | 21 | 17  | 41  | 39  | 29  | 28  | 21 | 21 | 16  | 27 | 27  | 21 | 20 | 16 | 20 | 20 | 16 | 14 |   |
|                     | 0.6  | 59  | 54  | 44  | 42  | 35  | 34 | 28  | 57  | 53  | 43  | 41  | 34 | 33 | 28  | 41 | 39  | 33 | 32 | 27 | 32 | 32 | 27 | 25 |   |
|                     | 0.8  | 69  | 62  | 53  | 50  | 43  | 41 | 35  | 66  | 60  | 52  | 49  | 42 | 41 | 35  | 49 | 47  | 41 | 40 | 34 | 39 | 39 | 34 | 31 |   |
|                     | 1    | 77  | 69  | 62  | 57  | 51  | 49 | 42  | 74  | 67  | 60  | 56  | 50 | 48 | 42  | 57 | 54  | 49 | 47 | 41 | 47 | 46 | 41 | 38 |   |
|                     | 1.25 | 85  | 76  | 71  | 65  | 60  | 57 | 50  | 82  | 73  | 69  | 63  | 59 | 56 | 50  | 65 | 61  | 57 | 54 | 49 | 54 | 53 | 48 | 45 |   |
|                     | 1.5  | 90  | 80  | 76  | 69  | 66  | 62 | 55  | 87  | 77  | 74  | 68  | 65 | 61 | 55  | 70 | 65  | 62 | 59 | 54 | 59 | 57 | 52 | 49 |   |
|                     | 2    | 98  | 85  | 86  | 77  | 76  | 70 | 64  | 94  | 83  | 83  | 75  | 74 | 68 | 63  | 78 | 72  | 70 | 66 | 61 | 67 | 64 | 60 | 57 |   |
|                     | 2.5  | 104 | 89  | 93  | 82  | 84  | 75 | 70  | 99  | 87  | 89  | 80  | 81 | 74 | 69  | 83 | 77  | 77 | 72 | 68 | 73 | 70 | 66 | 62 |   |
|                     | 3    | 107 | 92  | 97  | 85  | 89  | 79 | 74  | 103 | 90  | 94  | 84  | 86 | 78 | 73  | 87 | 80  | 81 | 76 | 72 | 77 | 73 | 70 | 66 |   |
|                     | 4    | 112 | 95  | 104 | 90  | 97  | 85 | 80  | 107 | 93  | 100 | 88  | 93 | 84 | 79  | 93 | 85  | 88 | 81 | 77 | 82 | 78 | 75 | 71 |   |
|                     | 5    | 115 | 97  | 108 | 93  | 102 | 89 | 85  | 110 | 95  | 104 | 91  | 98 | 87 | 84  | 96 | 88  | 92 | 84 | 81 | 86 | 82 | 79 | 75 |   |
| 7                   | 119  | 100 | 113 | 96  | 108 | 93  | 90 | 114 | 98  | 109 | 95  | 104 | 92 | 89 | 101 | 91 | 97  | 89 | 86 | 91 | 86 | 84 | 80 |    |   |
| 10                  | 122  | 102 | 118 | 99  | 114 | 97  | 94 | 117 | 100 | 113 | 98  | 109 | 95 | 93 | 104 | 94 | 102 | 92 | 90 | 95 | 89 | 88 | 84 |    |   |

## 配光曲線

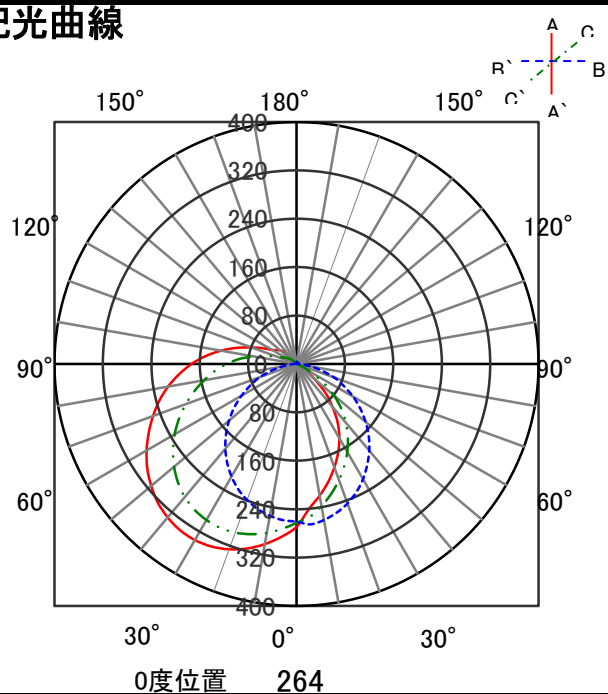

## 直射水平面照度

