

ECOHiLUX照明器具 配光データシート

意匠図


品名	ラインルクス	保守率	
セット品番	LX170F-88L-WW110T	良	0.69
器具品名	ウォールウォッシャー型	中	0.67
器具品番	LXBF-WW110T	否	0.63
		器具効率	
器具光束	8820lm	上方向	0%
光源	LXU170F-90L-110T	下方向	98%
光源光束	9000lm	全方向	98%



照明率表

		作業面照明率(×0.01)																										
反射率	天井	80								70								50						30				0
	壁 床	70		50		30		10		70		50		30		10		50		30		10		30		10		0
室 指 数	0.4	43	40	29	28	22	21	17	41	39	29	28	21	21	16	27	27	21	20	16	20	20	16	14	14	14	14	14
	0.6	59	54	44	42	35	34	28	57	53	43	41	34	33	28	41	39	33	32	27	32	32	27	25	25	25	25	25
	0.8	69	62	53	50	43	41	35	66	60	52	49	42	41	35	49	47	41	40	34	39	39	34	31	31	31	31	31
	1	77	69	62	57	51	49	42	74	67	60	56	50	48	42	57	54	49	47	41	47	46	41	38	38	38	38	38
	1.25	85	76	71	65	60	57	50	82	73	69	63	59	56	50	65	61	57	54	49	54	53	48	45	45	45	45	45
	1.5	90	80	76	69	66	62	55	87	77	74	68	65	61	55	70	65	62	59	54	59	57	52	49	49	49	49	49
	2	98	85	86	77	76	70	64	94	83	83	75	74	68	63	78	72	70	66	61	67	64	60	57	57	57	57	57
	2.5	104	89	93	82	84	75	70	99	87	89	80	81	74	69	83	77	77	72	68	73	70	66	62	62	62	62	62
	3	107	92	97	85	89	79	74	103	90	94	84	86	78	73	87	80	81	76	72	77	73	70	66	66	66	66	66
	4	112	95	104	90	97	85	80	107	93	100	88	93	84	79	93	85	88	81	77	82	78	75	71	71	71	71	71
	5	115	97	108	93	102	89	85	110	95	104	91	98	87	84	96	88	92	84	81	86	82	79	75	75	75	75	75
	7	119	100	113	96	108	93	90	114	98	109	95	104	92	89	101	91	97	89	86	91	86	84	80	80	80	80	80
	10	122	102	118	99	114	97	94	117	100	113	98	109	95	93	104	94	102	92	90	95	89	88	84	84	84	84	84

配光曲線

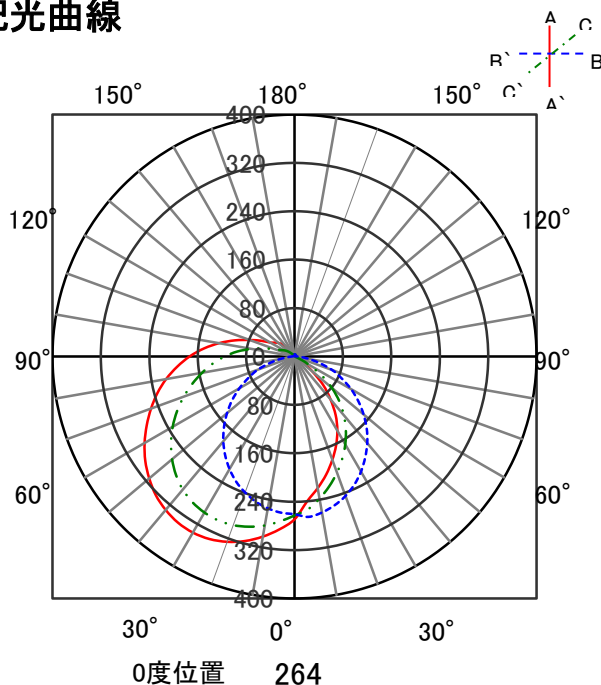

直射水平面照度

