


# ECOHiLUX照明器具 配光データシート

## 意匠図


品名	ラインルクス	保守率	
		良	0.81
セット品番	LX190F-180D-UK110-W170-LI	中	0.77
器具品名	埋込型	否	0.68
器具品番	LXBF-UK110T-W170	器具効率	
器具光束	18050lm	上方向	0%
光源	LXU190F-190D-110-LI	下方向	100%
光源光束	19000lm	全方向	100%

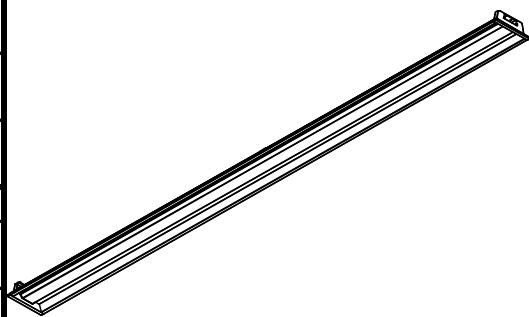

## 照度率表

反射率	天井	作業面照度率(×0.01)																	
		80				70				50				30				0	
		壁	70	50	30	10	70	50	30	10	50	30	10	30	10	10	30	10	0
室 指 数	床	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0
	0.4	45	42	31	30	24	23	19	44	41	31	30	24	23	19	30	29	23	23
	0.6	62	57	47	45	38	37	32	60	56	47	44	38	37	32	45	43	37	36
	0.8	72	66	57	54	48	46	40	70	64	56	53	47	45	40	54	52	46	45
	1	81	73	67	62	57	54	48	79	71	65	61	56	53	48	62	59	54	52
	1.25	90	80	76	70	66	62	56	87	78	74	69	65	62	56	71	67	63	61
	1.5	95	84	82	75	73	67	62	92	82	80	73	71	67	61	76	71	69	66
	2	103	90	92	82	83	76	70	99	88	89	81	75	70	85	79	78	73	69
	2.5	108	94	99	87	91	82	77	105	92	96	86	88	81	76	91	84	85	79
	3	112	96	103	90	96	86	81	108	94	100	89	93	85	81	94	87	89	83
	4	117	99	110	95	103	91	87	112	98	106	94	100	90	86	100	91	95	88
	5	120	101	114	98	108	94	91	115	100	110	96	105	93	90	103	94	99	91
	7	123	104	119	101	114	98	96	118	102	115	100	111	97	95	107	97	104	95
	10	126	105	122	103	119	102	100	121	104	118	102	115	100	99	110	100	108	98

## 配光曲線

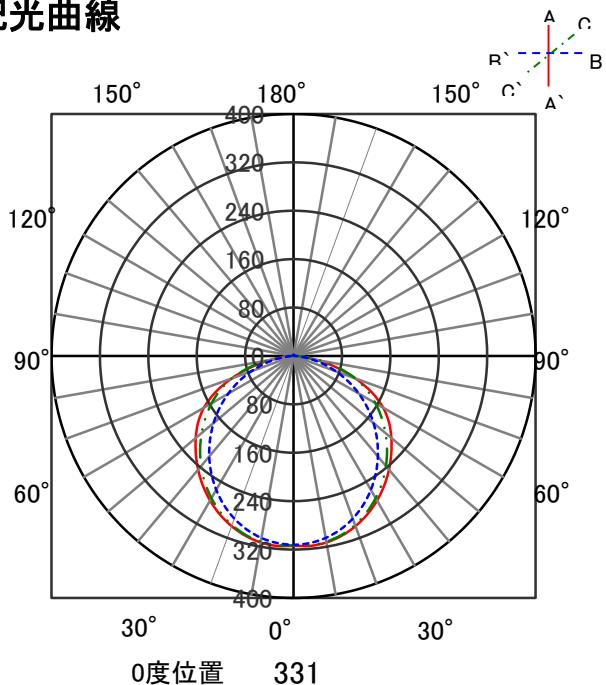

## 直射水平面照度

