


ECOHiLUX照明器具 配光データシート

意匠図


品名	ラインルクス	保守率	
セット品番	LX3-170-38W-CH40-W90	良	0.69
		中	0.67
		否	0.63
器具品名	埋込型 Cチャン回避型	器具効率	
器具品番	LXBF-CH40-W90	上方向	0%
器具光束	4000lm	下方向	100%
光源	LX3U170-38W-40S	全方向	100%
光源光束	4000lm		

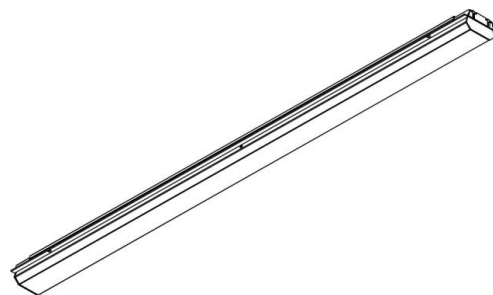

照明率表

作業面照明率(×0.01)																															
反 射 率	天井	80								70								50						30				0			
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0			
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	10	30	10	0		
室 指 数	0.4	45	42	31	30	24	23	19	44	41	31	30	24	23	19	29	29	23	22	18	22	22	18	16	16	16	16	16	16		
	0.6	62	57	47	45	38	37	32	60	55	46	44	38	37	31	44	42	36	36	31	35	35	30	28	28	28	28	28	28		
	0.8	72	65	57	53	47	45	39	69	63	55	52	46	44	39	53	50	45	43	38	43	42	37	35	35	35	35	35	35		
	1	81	72	66	61	56	53	47	77	70	64	60	55	52	46	61	57	53	51	46	51	49	45	42	42	42	42	42	42		
	1.25	89	79	75	69	65	61	55	85	77	73	67	64	60	55	69	65	61	59	53	59	57	52	49	49	49	49	49	49		
	1.5	94	83	81	73	71	66	60	90	81	78	72	69	65	60	74	69	66	63	58	63	61	57	54	54	54	54	54	54	54	
	2	102	89	90	81	81	74	69	98	86	87	79	79	73	68	82	76	75	71	66	71	69	65	61	61	61	61	61	61	61	
	2.5	107	93	97	86	89	80	75	103	90	94	84	86	79	74	87	81	81	76	72	77	74	70	67	67	67	67	67	67	67	
	3	111	95	102	89	94	84	79	106	93	98	87	91	82	78	91	84	86	80	76	81	77	74	70	70	70	70	70	70	70	70
	4	115	98	108	93	101	89	85	110	96	104	92	98	88	84	96	88	92	85	82	86	82	79	75	75	75	75	75	75	75	75
	5	118	100	112	96	106	93	89	113	98	108	94	103	91	88	100	91	96	88	85	90	85	83	79	79	79	79	79	79	79	79
7	122	103	117	100	113	97	94	117	100	112	98	108	95	93	104	94	101	92	90	94	89	87	83	83	83	83	83	83	83	83	83
10	125	104	121	102	118	100	98	119	102	116	100	113	98	97	107	97	105	95	94	97	92	91	86	86	86	86	86	86	86	86	86

配光曲線

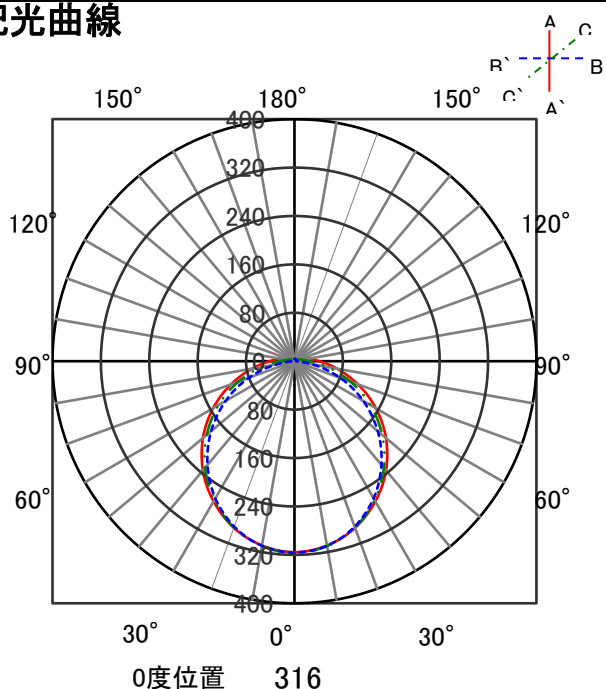

直射水平面照度

