


# ECOHiLUX照明器具 配光データシート

## 意匠図


品名	ラインルクス	保守率	
セット品番	LX160F-69N-TR40B-LI	良	-
器具品名	トラフ型 防雨・防湿型	中	-
器具品番	LXBF-TR40-B	否	-
器具光束	6900lm	器具効率	
光源	-	上方向	5%
光源光束	一体型器具のため、器具光束表示	下方向	95%
		全方向	100%

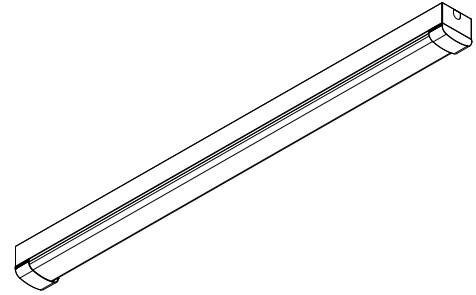

## 照明率表

		作業面照明率(×0.01)																											
反射率	天井	80								70				50				30				0							
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0	
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室 指 数	0.4	44	41	31	30	23	23	18	43	40	30	29	23	22	18	29	28	22	22	18	22	21	18	16					
	0.6	60	56	46	44	37	36	31	58	54	45	43	37	36	31	43	41	36	35	30	35	34	30	27					
	0.8	70	64	56	52	46	44	38	68	62	54	51	45	44	38	52	49	44	42	37	42	41	37	34					
	1	79	71	64	60	55	52	46	76	69	63	59	54	51	46	60	56	52	50	45	50	49	44	41					
	1.25	87	77	74	67	64	60	54	84	75	71	66	63	59	54	68	64	60	58	53	58	56	52	49					
	1.5	92	81	79	72	70	65	59	89	79	77	71	68	64	58	73	68	65	62	57	63	60	56	53					
	2	100	87	89	79	80	73	67	96	85	86	78	78	72	67	80	75	74	70	65	70	68	64	60					
	2.5	105	91	95	84	87	79	74	101	89	92	83	85	77	73	86	80	80	75	71	76	73	70	66					
	3	109	93	100	87	92	82	78	104	91	96	86	89	81	77	90	83	84	79	75	80	76	73	70					
	4	113	96	106	92	99	87	84	108	94	102	90	96	86	83	95	87	90	84	80	85	81	78	75					
5	116	98	110	94	104	91	88	111	96	106	93	101	89	86	98	89	94	87	84	88	84	82	78						
7	120	101	115	98	110	95	92	114	99	110	96	106	93	91	102	93	99	91	89	93	88	86	82						
10	122	102	119	100	115	98	96	117	100	114	98	111	97	95	105	95	103	94	92	96	91	89	85						

## 配光曲線

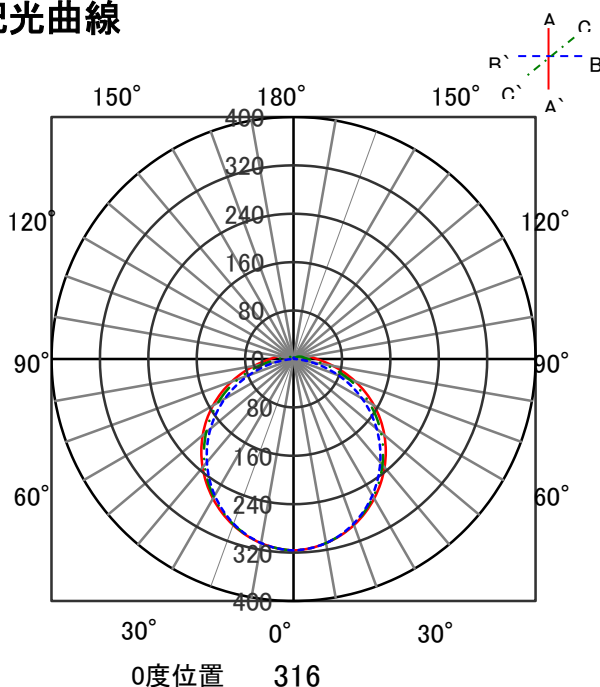

## 直射水平面照度

