


ECOHiLUX照明器具 配光データシート

意匠図

| | | | |
|-------|-------------------------|------|------|
| 品名 | ラインルクス | 保守率 | |
| セット品番 | LX160F-43L-KK40-W250-PS | 良 | 0.67 |
| 器具品名 | 直付下面開放型 | 中 | 0.63 |
| 器具品番 | LXBF-KK40-W250 | 否 | 0.56 |
| 器具光束 | 4355lm | 器具効率 | |
| 光源 | LXU160F-44L-40S-PS | 上方向 | 1% |
| 光源光束 | 4590lm | 下方向 | 99% |
| | | 全方向 | 100% |

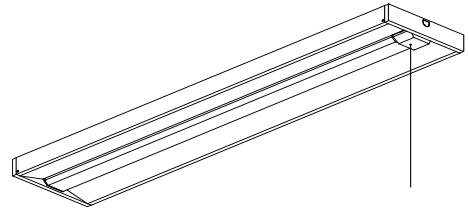


照明率表

作業面照明率(×0.01)

| 反射率(%) | 天井 | 80 | | | | | | | | 70 | | | | | | | | 50 | | | | 30 | | | | 0 | | | |
|-------------|------|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|---|
| | | 壁 | | 70 | | 50 | | 30 | | 10 | | 70 | | 50 | | 30 | | 10 | | 50 | | 30 | | 10 | | 0 | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 0 | 0 |
| 室 指 数 | 0.4 | 45 | 42 | 32 | 30 | 24 | 23 | 19 | 44 | 41 | 31 | 30 | 24 | 23 | 19 | 30 | 29 | 23 | 23 | 19 | 23 | 23 | 19 | 23 | 23 | 19 | 17 | 17 | |
| | 0.6 | 62 | 57 | 47 | 45 | 38 | 37 | 32 | 60 | 56 | 47 | 44 | 38 | 37 | 32 | 45 | 43 | 37 | 36 | 31 | 36 | 36 | 31 | 36 | 36 | 31 | 29 | 29 | |
| | 0.8 | 72 | 66 | 57 | 54 | 47 | 45 | 39 | 70 | 64 | 56 | 53 | 47 | 45 | 39 | 54 | 51 | 46 | 44 | 39 | 44 | 43 | 39 | 44 | 43 | 39 | 36 | 36 | |
| | 1 | 81 | 73 | 66 | 62 | 56 | 53 | 47 | 78 | 71 | 65 | 61 | 55 | 53 | 47 | 62 | 59 | 54 | 52 | 47 | 52 | 51 | 46 | 51 | 46 | 44 | 44 | 44 | |
| | 1.25 | 89 | 80 | 76 | 69 | 66 | 62 | 56 | 86 | 78 | 74 | 68 | 65 | 61 | 55 | 70 | 66 | 63 | 60 | 55 | 61 | 59 | 54 | 59 | 54 | 52 | 52 | 52 | |
| | 1.5 | 95 | 84 | 82 | 74 | 72 | 67 | 61 | 91 | 82 | 80 | 73 | 71 | 66 | 61 | 76 | 71 | 68 | 65 | 60 | 66 | 64 | 59 | 64 | 59 | 56 | 56 | 56 | |
| | 2 | 103 | 89 | 91 | 81 | 82 | 75 | 70 | 99 | 88 | 89 | 80 | 80 | 74 | 69 | 84 | 78 | 77 | 73 | 68 | 74 | 71 | 67 | 71 | 67 | 64 | 64 | 64 | |
| | 2.5 | 108 | 93 | 98 | 87 | 90 | 81 | 76 | 104 | 92 | 95 | 85 | 88 | 80 | 75 | 90 | 83 | 84 | 78 | 74 | 80 | 77 | 73 | 77 | 73 | 70 | 70 | 70 | |
| | 3 | 112 | 96 | 103 | 90 | 95 | 85 | 80 | 107 | 94 | 99 | 89 | 93 | 84 | 80 | 94 | 86 | 88 | 82 | 78 | 84 | 80 | 77 | 80 | 77 | 74 | 74 | 74 | |
| | 4 | 116 | 99 | 109 | 94 | 103 | 90 | 86 | 112 | 97 | 105 | 93 | 100 | 89 | 86 | 99 | 91 | 94 | 87 | 84 | 90 | 85 | 83 | 86 | 83 | 80 | 80 | 80 | |
| 5 | 119 | 101 | 113 | 97 | 108 | 94 | 90 | 115 | 99 | 109 | 96 | 104 | 93 | 90 | 102 | 93 | 99 | 91 | 88 | 93 | 89 | 86 | 89 | 86 | 83 | 83 | 83 | | |
| 7 | 123 | 103 | 118 | 101 | 114 | 98 | 95 | 118 | 102 | 114 | 99 | 110 | 97 | 94 | 107 | 97 | 104 | 95 | 93 | 98 | 92 | 91 | 94 | 91 | 88 | 88 | 88 | | |
| 10 | 126 | 105 | 122 | 103 | 119 | 101 | 99 | 121 | 104 | 118 | 102 | 115 | 100 | 98 | 110 | 99 | 108 | 98 | 96 | 101 | 95 | 94 | 97 | 94 | 91 | 89 | 89 | | |

配光曲線

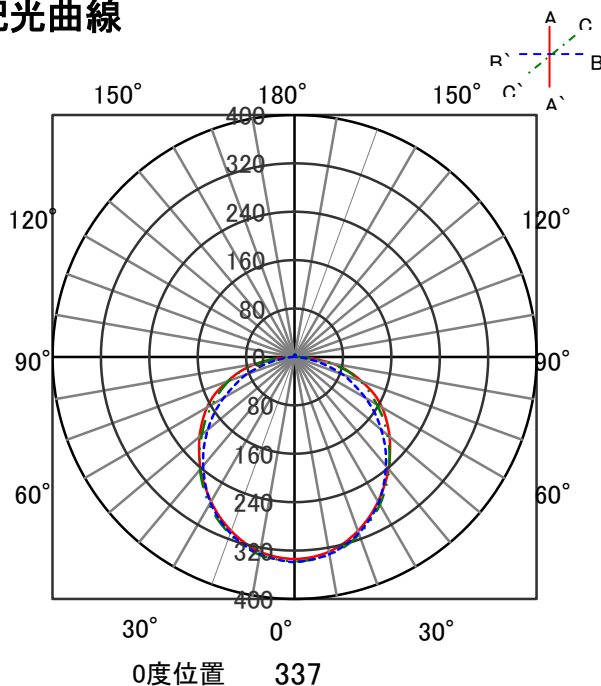

直射水平面照度

