


# ECOHiLUX照明器具 配光データシート

## 意匠図

品名	LEDベースライト			保守率	
セット品番	LX3-170-117L-UK110T-W240-D			良	0.81
光源品番	LX3U170-120L-110T-D			中	0.77
器具品番	LXBF-UK110T-W240-D			否	0.68
器具光束	11700lm	最大取付間隔		器具効率	
光源	LED	A-A	1.34 H	上方向	0%
光源光束	12060lm	B-B	1.25 H	下方向	100%
				全方向	100%

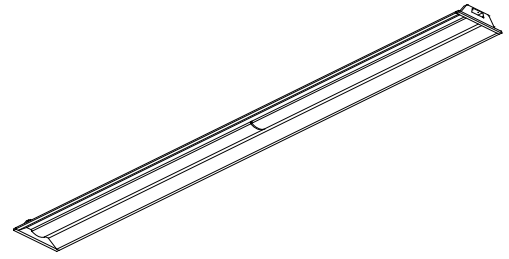


## 照明率表

作業面照明率(×0.01)

反(射率)	天井	80								70								50				30		0			
		壁	70	50	30	10	70	50	30	10	50	30	10	30	10	30	10	0	0								
0.4	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	10	0	0
0.6	0.4	46	43	32	31	24	24	20	44	42	32	30	24	24	19	31	30	24	24	19	24	23	19	18	18	18	18
0.8	0.6	63	58	48	46	40	38	33	61	57	48	45	39	38	33	46	44	38	38	33	38	37	33	31	31	31	31
1	0.8	73	66	58	55	49	47	41	71	65	57	54	48	46	41	55	53	47	46	41	46	45	40	38	38	38	38
1.25	1	82	74	68	63	58	55	49	79	72	66	62	57	55	49	64	60	56	54	49	54	53	48	46	46	46	46
1.5	1.25	90	80	77	71	68	63	58	88	79	75	70	67	63	58	72	68	65	62	57	63	61	57	54	54	54	54
2	1.5	96	84	83	76	74	69	63	93	83	81	75	73	68	63	77	73	70	67	62	68	66	62	59	59	59	59
2.5	2	104	90	93	83	84	77	72	100	89	90	82	82	76	71	86	80	79	75	71	76	73	70	67	67	67	67
3	2.5	109	94	100	88	92	83	78	105	93	97	87	90	82	78	92	85	86	81	77	82	79	76	73	73	73	73
4	3	112	96	104	91	97	87	82	108	95	101	90	95	86	82	95	88	90	84	81	86	83	80	77	77	77	77
5	4	117	100	110	95	104	92	88	113	98	107	94	101	91	88	101	92	96	89	86	92	87	85	82	82	82	82
7	5	120	102	114	98	109	95	92	116	100	111	97	106	94	91	104	95	100	92	90	95	91	89	86	86	86	86
10	7	123	104	119	101	115	99	97	119	102	115	100	112	98	96	108	98	105	96	94	99	94	93	90	90	90	90
	10	126	105	123	104	120	102	100	121	104	119	102	116	101	99	111	100	109	99	98	103	97	96	93	93	93	93

## 配光曲線

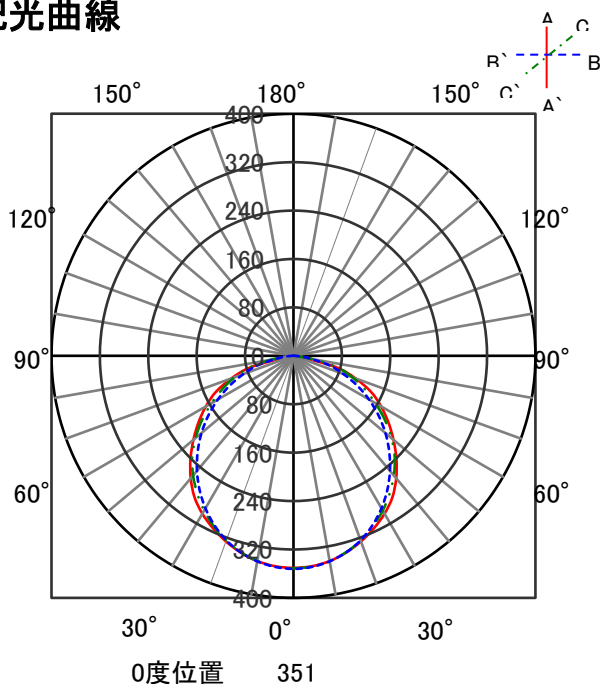

## 直射水平面照度

