


ECOHiLUX照明器具 配光データシート

意匠図

器具品名	防爆照明			保守率	
器具品番	IR-LZBA400141V2			良	0.69
部品品名	-			中	0.67
部品品番	-			否	0.63
				器具効率	
器具光束	5850lm	最大取付間隔		上方向	0%
光源	LED	AA	1.71H	下方向	100%
光源光束	-	BB	1.30H	全方向	100%

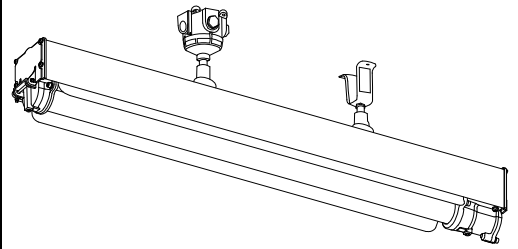


照明率表

作業面照明率(×0.01)

別率 (%)	天井	80								70								50						30				0										
	壁	70				50				30				10				50				30				10				30				10				0
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0								
室 指 数	0.4	45	42	32	30	24	24	19	44	41	31	30	24	23	19	30	29	23	23	19	23	23	19	23	23	19	23	23	19	17								
	0.6	62	57	48	45	39	38	32	60	56	47	45	38	37	32	45	44	38	37	32	37	36	32	37	36	32	37	36	32	30								
	0.8	72	66	57	54	48	46	40	70	64	56	53	47	46	40	54	52	46	45	40	45	44	39	44	43	39	44	43	37	37								
	1	81	73	67	62	57	54	48	78	71	65	61	56	54	48	63	59	55	53	48	53	52	47	52	51	47	52	51	47	45								
	1.25	90	80	76	70	66	62	57	87	78	74	69	65	62	56	71	67	64	61	56	62	60	55	60	59	55	60	59	55	53								
	1.5	95	84	82	75	73	67	62	92	82	80	74	71	67	62	76	72	69	66	61	67	65	60	65	64	60	65	64	60	58								
	2	103	89	92	82	83	76	70	99	88	89	81	81	75	70	85	79	78	74	69	75	72	69	72	71	69	72	71	69	66								
	2.5	108	93	98	87	91	82	77	104	92	96	86	89	81	77	91	84	85	79	76	81	78	75	78	77	75	78	77	75	72								
	3	112	96	103	90	96	86	81	108	94	100	89	93	85	81	94	87	89	83	80	85	82	79	82	81	79	82	81	79	76								
	4	116	99	109	95	103	91	87	112	97	106	93	100	90	87	100	91	95	88	85	91	87	84	87	86	84	87	86	84	81								
	5	119	101	113	97	108	94	91	115	99	110	96	105	93	90	103	94	99	91	89	94	90	88	90	89	88	90	89	88	85								
	7	123	103	118	101	114	98	96	118	102	114	99	111	97	95	107	97	104	95	93	99	93	92	92	91	90	92	91	90	89								
	10	125	105	122	103	119	101	100	121	103	118	102	115	100	99	110	100	108	98	97	102	96	95	95	94	93	95	94	93	92								

配光曲線

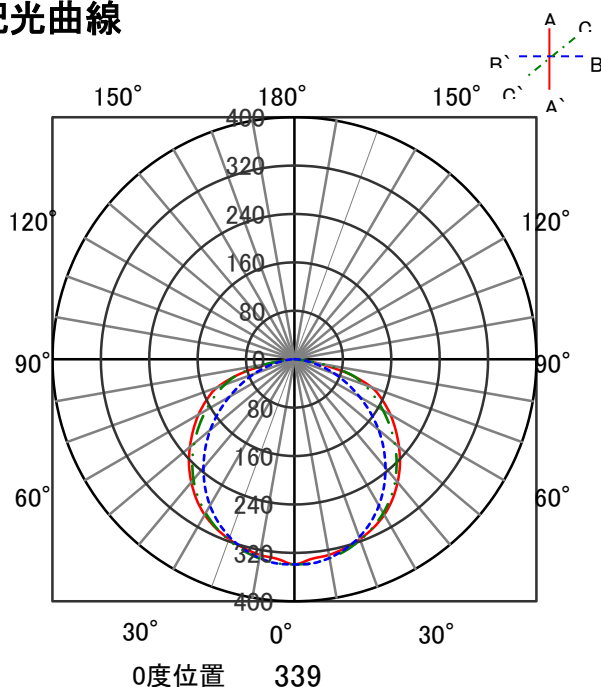

直射水平面照度

