


ECOHiLUX照明器具 配光データシート

意匠図


品名	LEDブラケットライト			保守率	
セット品番	LBR3NH14-SQPL			良	0.69
光源品名	LDF3N-H-GX53-HE140			中	0.67
器具品番	LBR-GX53-SQPL			否	0.63
器具光束	380 lm	最大取付間隔		器具効率	
光源	LED	AA	1.37H	上方向	17%
光源光束	480 lm	BB	1.37H	下方向	83%
				全方向	100%



照明率表

作業面照明率(×0.01)																												
反 射 率 (%)	天井	80								70								50						30			0	
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	10	0	
室 指 数	0.4	41	39	28	27	21	20	16	40	37	27	26	20	20	15	25	24	19	19	15	18	17	14	11				
	0.6	57	52	42	40	33	32	26	54	50	40	38	32	31	26	37	36	30	29	24	28	28	23	20				
	0.8	66	60	51	48	41	39	33	63	58	49	46	40	38	33	45	43	37	36	31	35	34	30	26				
	1	74	67	59	55	49	47	40	70	64	57	53	48	45	39	52	50	44	43	38	41	40	36	31				
	1.25	82	73	68	62	58	54	48	78	70	65	60	56	53	47	60	56	52	50	45	48	47	42	38				
	1.5	88	77	74	67	64	59	53	83	74	71	65	61	58	52	65	60	57	54	49	53	51	47	42				
	2	95	83	83	74	74	67	61	90	80	79	72	71	65	60	72	67	65	62	57	60	58	54	48				
	2.5	101	87	90	79	81	73	68	95	84	86	77	78	71	66	78	72	71	67	63	66	63	59	53				
	3	104	89	95	83	86	77	72	98	86	90	80	83	75	70	81	75	76	70	67	69	66	63	57				
	4	109	93	101	87	94	83	78	103	90	96	85	90	80	76	87	79	82	76	72	75	71	68	62				
	5	112	95	105	90	99	86	82	106	92	100	88	94	84	80	90	82	86	79	76	78	74	72	65				
	7	116	98	111	94	106	91	88	109	94	105	91	100	88	85	94	86	91	83	81	82	78	76	69				
10	119	100	115	97	111	94	92	112	96	109	94	105	92	89	98	88	95	86	85	86	81	80	72					

配光曲線

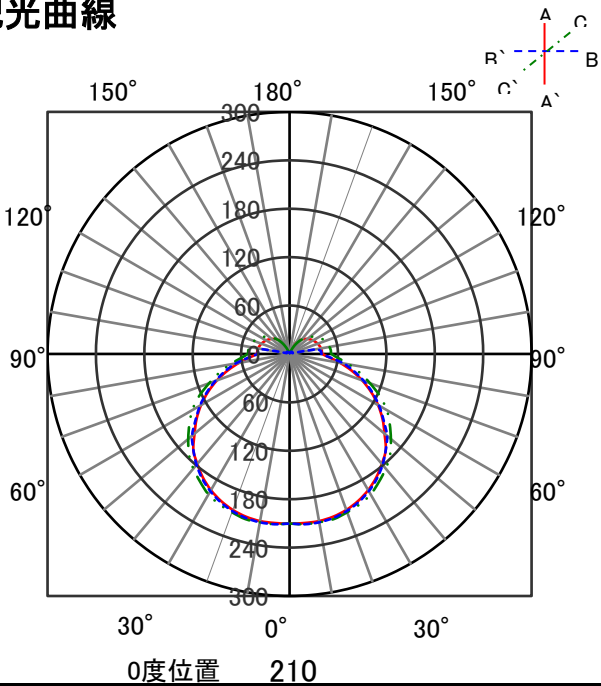

直射水平面照度

