


ECOHiLUX照明器具 配光データシート

意匠図


品名	LEDポーチ灯			保守率	
セット品番	LBR3LH14-CIPL-BS			良	0.69
光源品番	LDF3N-H-GX53-HE140			中	0.67
器具品番	LBR-GX53-CIPL-BS			否	0.63
器具光束	380 lm	最大取付間隔		器具効率	
光源	LED	AA	1.38H	上方向	2%
光源光束	480 lm	BB	1.38H	下方向	98%
				全方向	100%

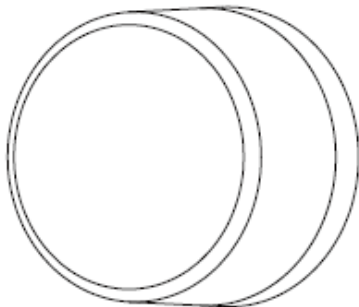

照明率表

作業面照明率(×0.01)																												
反 射 率 (%)	天井	80								70								50						30			0	
	壁	70			50		30			10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	10	0	
室 指 数	0.4	42	40	28	27	21	20	16	41	39	28	27	20	20	15	27	26	20	20	15	20	19	15	14				
	0.6	58	53	43	41	33	32	27	56	52	42	40	33	32	27	40	39	32	31	26	31	31	26	24				
	0.8	68	62	52	49	42	40	34	66	60	51	48	41	40	34	49	47	40	39	33	39	38	33	31				
	1	77	69	61	57	50	48	41	74	67	59	56	50	47	41	57	54	48	46	41	47	45	40	38				
	1.25	85	75	70	64	59	56	49	82	73	68	63	58	55	49	65	61	56	54	48	54	53	48	45				
	1.5	90	79	76	69	66	61	54	87	77	74	68	64	60	54	70	66	62	59	53	59	57	53	50				
	2	98	85	86	77	76	69	63	94	83	83	75	74	68	62	78	73	71	67	61	68	65	61	58				
	2.5	104	90	93	82	83	75	69	100	88	90	80	81	74	69	84	78	77	72	68	74	71	67	64				
	3	107	92	97	85	89	79	74	103	90	94	84	86	78	73	88	81	82	76	72	78	75	71	68				
	4	112	96	104	90	97	85	80	108	94	100	89	94	84	80	94	86	88	82	78	84	80	77	73				
	5	116	98	108	93	102	89	85	111	96	105	92	99	88	84	98	89	93	85	82	88	83	81	77				
	7	120	101	114	97	109	93	90	115	99	110	95	105	92	89	102	93	99	90	87	93	88	86	82				
10	123	103	118	100	114	97	95	118	101	114	98	110	96	94	106	96	103	94	92	97	91	90	86					

配光曲線

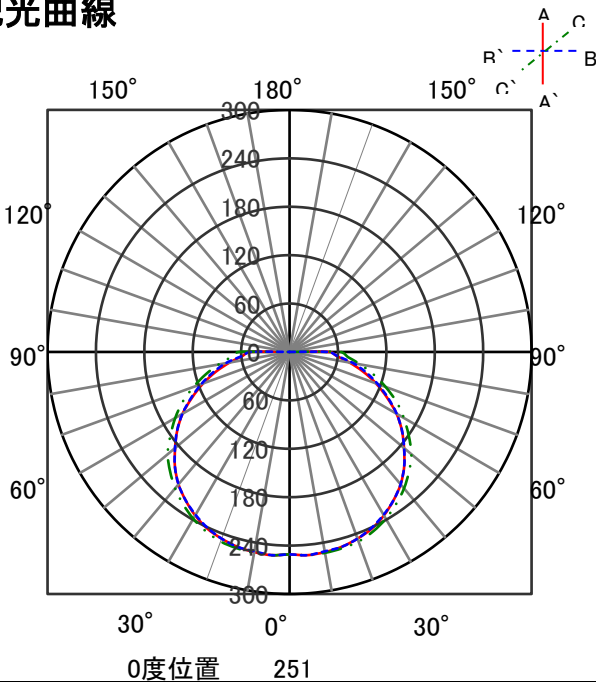

直射水平面照度

