


ECOHiLUX照明器具 配光データシート

意匠図


品名	LEDポーチ灯			保守率	
				良	0.69
セット品番	LBR3WWH14-CIPL-BS			中	0.67
光源品番	LDF3WW-H-GX53-HE140			否	0.63
器具品番	LBR-GX53-CIPL-BS			器具効率	
器具光束	380 lm	最大取付間隔		上方向	2%
光源	LED	AA	1.38H	下方向	98%
光源光束	480 lm	BB	1.38H	全方向	100%

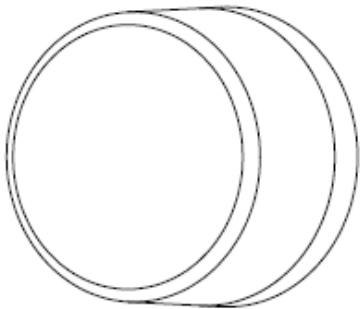

照明率表

作業面照明率(×0.01)																																
反射率(%)	天井	80								70								50						30				0				
	壁	70			50			30		10	70			50			30			10	50			30			10	30			10	0
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	10	30	10	10	0		
室指数	0.4	42	40	28	27	21	20	16	41	39	28	27	20	20	15	27	26	20	20	15	20	19	15	14	14	13	12	11	10	9		
	0.6	58	53	43	41	33	32	27	56	52	42	40	33	32	27	40	39	32	31	26	31	31	26	24	23	22	21	20	19	18		
	0.8	68	62	52	49	42	40	34	66	60	51	48	41	40	34	49	47	40	39	33	39	38	33	31	30	29	28	27	26	25		
	1	77	69	61	57	50	48	41	74	67	59	56	50	47	41	57	54	48	46	41	47	45	40	38	37	36	35	34	33	32		
	1.25	85	75	70	64	59	56	49	82	73	68	63	58	55	49	65	61	56	54	48	54	53	48	45	44	43	42	41	40	39		
	1.5	90	79	76	69	66	61	54	87	77	74	68	64	60	54	70	66	62	59	53	59	57	53	50	49	48	47	46	45	44		
	2	98	85	86	77	76	69	63	94	83	83	75	74	68	62	78	73	71	67	61	68	65	61	58	57	56	55	54	53	52		
	2.5	104	90	93	82	83	75	69	100	88	90	80	81	74	69	84	78	77	72	68	74	71	67	64	63	62	61	60	59	58		
	3	107	92	97	85	89	79	74	103	90	94	84	86	78	73	88	81	82	76	72	78	75	71	68	67	66	65	64	63	62	61	
	4	112	96	104	90	97	85	80	108	94	100	89	94	84	80	94	86	88	82	78	84	80	77	73	72	71	70	69	68	67	66	
	5	116	98	108	93	102	89	85	111	96	105	92	99	88	84	98	89	93	85	82	88	83	81	77	76	75	74	73	72	71	70	
7	120	101	114	97	109	93	90	115	99	110	95	105	92	89	102	93	99	90	87	93	88	86	82	81	80	79	78	77	76	75		
10	123	103	118	100	114	97	95	118	101	114	98	110	96	94	106	96	103	94	92	97	91	90	86	85	84	83	82	81	80	79		

配光曲線

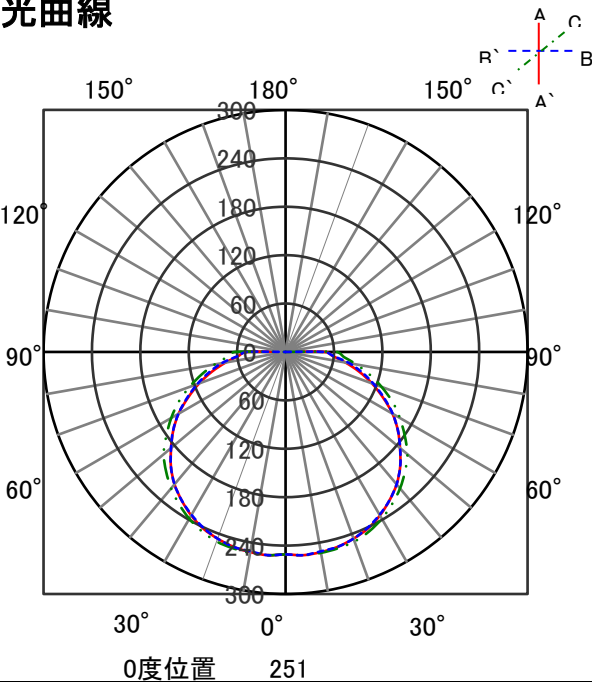

直射水平面照度

