


ECOHiLUX照明器具 配光データシート

意匠図


品名	スクエアパネル照明			保守率	
セット品番	SQP-4WW25-UK35-LI			良	0.77
光源品番	SQPL4WW25LI			中	0.72
器具品番	SQPBUK35			否	0.68
器具光束	4330 lm	最大取付間隔		器具効率	
光源	LED	AA	1.25H	上方向	2%
光源光束	4330 lm	BB	1.25H	下方向	98%
				全方向	100%

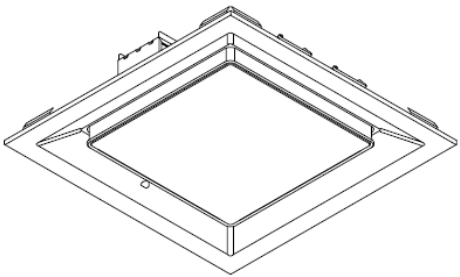

照明率表

作業面照明率(×0.01)																												
反射率(%)	天井	80								70								50						30				0
	壁	70			50		30			10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0		
室 指 数	0.4	45	42	31	30	24	23	19	44	41	31	30	24	23	19	30	29	23	23	19	23	22	18	17				
	0.6	62	57	47	45	38	37	32	60	56	46	44	38	37	32	45	43	37	36	31	36	36	31	29				
	0.8	72	65	57	54	47	45	40	70	64	56	53	47	45	39	54	51	46	44	39	44	43	39	36				
	1	81	73	66	61	56	54	48	78	71	65	61	56	53	47	62	59	54	52	47	52	51	46	44				
	1.25	89	79	76	69	66	62	56	86	77	74	68	65	61	56	70	66	63	60	55	61	59	54	52				
	1.5	94	83	82	74	72	67	61	91	81	79	73	71	66	61	75	71	68	65	60	66	64	59	57				
	2	102	89	91	81	82	75	70	98	87	88	80	80	74	69	84	78	77	73	68	74	71	67	64				
	2.5	108	93	98	87	90	81	76	104	91	95	85	88	80	76	90	83	84	78	74	80	77	73	70				
	3	111	95	102	90	95	85	81	107	94	99	88	93	84	80	93	86	88	82	78	84	80	77	74				
	4	116	99	109	94	102	90	86	111	97	105	93	99	89	86	98	90	94	87	84	89	85	83	79				
	5	119	101	113	97	107	93	90	114	99	109	95	104	92	89	102	93	98	90	88	93	88	86	83				
	7	122	103	118	100	113	98	95	117	101	113	99	110	96	94	106	96	103	94	92	97	92	90	87				
10	125	104	121	102	118	101	99	120	103	117	101	114	99	98	109	98	107	97	96	100	95	94	90					

配光曲線

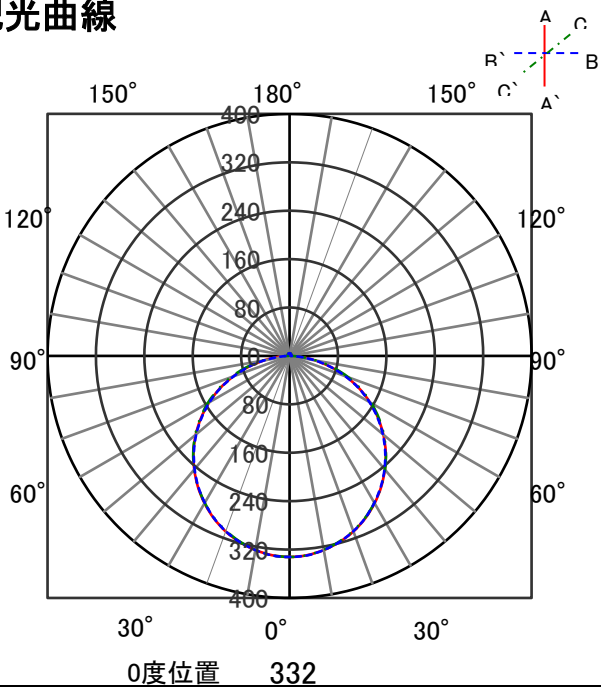

直射水平面照度

