


ECOHiLUX照明器具 配光データシート

品名	スクエアパネル照明			保守率	
				良	0.77
				中	0.72
				否	0.68
セット品番	SQP-9N25-UK27-LI			器具効率	
光源品番	SQPL9N25LI				
器具品番	SQPBUK27				
器具光束	9000 lm	最大取付間隔		上方向	2%
光源	LED	AA	1.25H	下方向	98%
光源光束	9000 lm	BB	1.25H	全方向	100%


意匠図

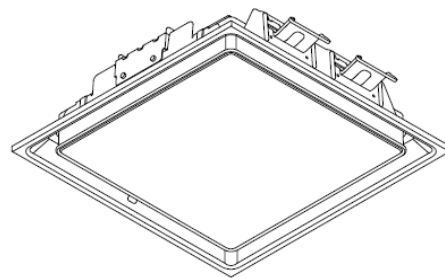

照明率表

作業面照明率(×0.01)																												
反 射 率 (%)	天井	80								70								50						30				0
	壁	70			50		30			10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0		
室 指 数	0.4	45	42	31	30	24	23	19	43	41	31	30	23	23	18	30	29	23	23	18	22	22	18	17				
	0.6	61	57	47	44	38	37	31	60	55	46	44	37	36	31	44	43	37	36	31	36	35	31	29				
	0.8	72	65	57	53	47	45	39	69	63	55	52	46	45	39	53	51	45	44	39	44	43	38	36				
	1	80	72	66	61	56	53	47	78	70	64	60	55	52	47	61	58	53	51	46	52	50	46	43				
	1.25	89	79	75	69	65	61	55	86	77	73	68	64	61	55	70	66	62	59	54	60	58	54	51				
	1.5	94	83	81	74	71	66	61	91	81	79	72	70	66	60	75	70	67	64	59	65	63	59	56				
	2	102	89	91	81	82	74	69	98	87	88	80	80	74	69	83	77	76	72	68	73	71	67	64				
	2.5	107	93	97	86	89	80	76	103	91	94	85	87	80	75	89	82	83	78	74	79	76	73	70				
	3	111	95	102	89	94	84	80	107	93	99	88	92	83	79	93	86	87	82	78	83	80	77	74				
	4	115	98	108	94	102	90	86	111	97	105	92	99	89	85	98	90	94	87	84	89	85	82	79				
	5	118	100	112	97	107	93	90	114	99	109	95	104	92	89	102	93	98	90	87	92	88	86	83				
	7	122	103	117	100	113	97	95	117	101	113	98	109	96	94	106	96	103	94	92	97	92	90	87				
10	125	104	121	102	118	100	99	120	103	117	101	114	99	97	109	98	107	97	95	100	95	93	90					

配光曲線

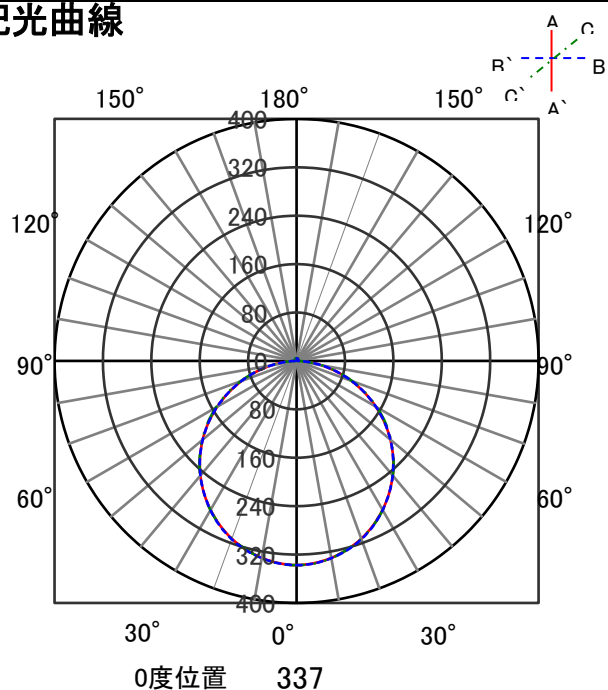

直射水平面照度

