


ECOHiLUX照明器具 配光データシート

意匠図


品名	LEDベースライト			保守率	
				良	0.83
				中	0.81
				否	0.77
セット品番	LX4-170-32WW-CL40W			器具効率	
光源品番	LX4U170-32WW-40S				
器具品番	LXBF-CL40W				
器具光束	3200 lm	最大取付間隔		上方向	4%
光源	LED	AA	1.64h	下方向	96%
光源光束	3200 lm	BB	1.29h	全方向	100%

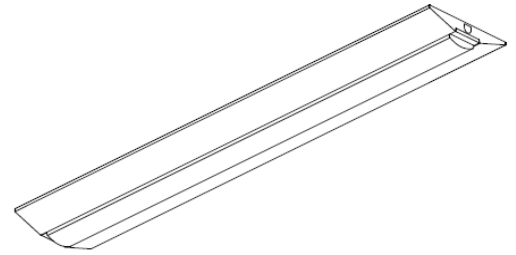

照明率表

		作業面照明率(×0.01)																											
反射率(%)	天井	80								70								50						30				0	
		70		50		30		10		70		50		30		10		50		30		10		30		10		0	
	壁	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	0
室 指 数	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	0
	0.4	44	42	31	30	23	23	18	43	41	30	29	23	23	18	29	28	23	22	18	22	22	18	22	22	18	16	16	16
	0.6	61	56	47	44	38	36	31	59	55	46	43	37	36	31	44	42	36	35	31	35	35	30	28	28	28	28	28	28
	0.8	71	65	56	53	47	45	39	69	63	55	52	46	44	38	52	50	44	43	38	43	42	37	35	35	35	35	35	35
	1	80	72	65	60	55	52	46	77	70	64	59	54	52	46	60	57	53	51	45	51	49	45	42	42	42	42	42	42
	1.3	88	78	74	68	65	61	55	85	76	72	67	63	60	54	69	65	61	58	53	59	57	53	50	50	50	50	50	50
	1.5	93	82	80	73	71	66	60	90	80	78	72	69	65	59	74	69	66	63	58	64	62	57	54	54	54	54	54	54
	2	101	88	90	80	80	74	68	97	86	87	79	79	73	67	82	76	75	71	66	72	69	65	62	62	62	62	62	62
	2.5	106	92	96	85	88	79	74	102	90	93	84	86	78	74	87	81	81	76	72	77	74	71	68	68	68	68	68	68
	3	110	94	101	88	93	83	79	105	92	97	87	91	82	78	91	84	86	80	76	81	78	75	71	71	71	71	71	71
	4	114	97	107	93	100	88	84	110	95	103	91	97	87	84	96	88	92	85	82	87	83	80	76	76	76	76	76	76
	5	117	99	111	95	105	92	88	113	98	107	94	102	91	87	100	91	96	88	85	90	86	83	80	80	80	80	80	80
	7	121	102	116	99	112	96	93	116	100	112	97	108	95	92	104	94	101	92	90	94	89	88	84	84	84	84	84	84
	10	124	103	120	101	117	99	97	119	102	115	100	112	98	96	107	97	105	95	93	98	92	91	87	87	87	87	87	87

配光曲線

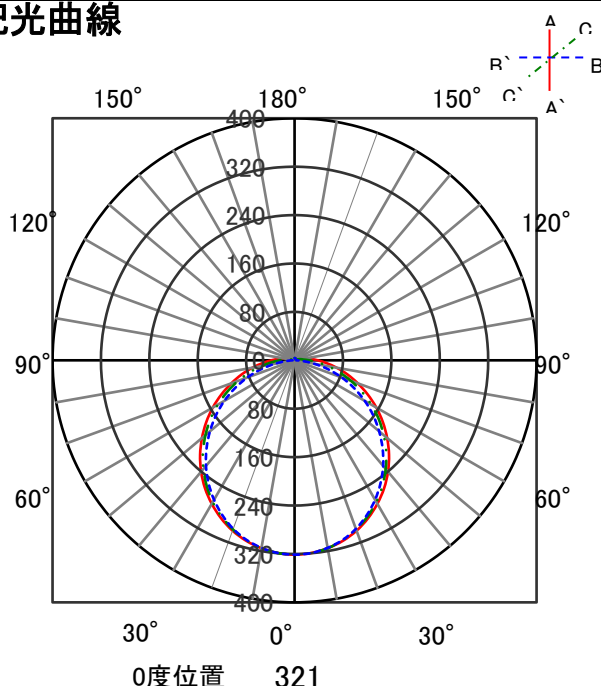

直射水平面照度

