


ECOHiLUX照明器具 配光データシート

意匠図

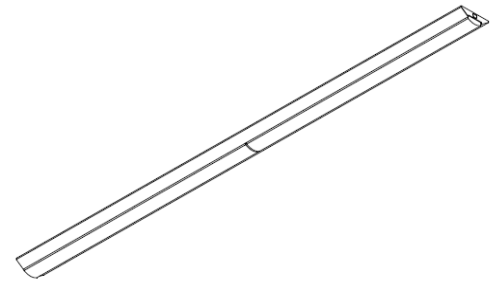


品名	LEDベースライト			保守率	
				良	0.83
				中	0.81
				否	0.77
セット品番	LX4-170-64WW-CL110T			器具効率	
光源品番	LX4U170-64WW-110T				
器具品番	LXBF-CL110T				
器具光束	6210 lm	最大取付間隔		上方向	4%
光源	LED	A-A	1.30 H	下方向	96%
光源光束	6210 lm	B-B	1.25 H	全方向	100%

照明率表

作業面照明率(×0.01)

(反射率%)	天井壁	80								70								50						30				0					
		70				50				30				10				50			30			10	30			10	0				
		床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	10	30	10	0			
室指数	0.4	44	42	31	30	23	23	18	43	41	30	29	23	23	18	29	28	23	22	18	22	22	18	26	24	18	26	24	18	26			
	0.6	61	56	46	44	38	36	31	59	55	45	43	37	36	31	44	42	36	35	31	35	35	30	35	33	30	35	33	30	35			
	0.8	71	65	56	53	46	45	39	69	63	55	52	46	44	38	52	50	44	43	38	43	42	37	43	41	37	43	41	37	43			
	1	80	72	65	60	55	52	46	77	70	63	59	54	52	46	60	57	52	50	45	51	49	45	42	49	47	45	42	49	47	45		
	1.25	88	78	74	68	64	60	55	85	76	72	67	63	60	54	68	64	61	58	53	59	57	52	49	57	55	52	49	57	55	52		
	1.5	93	82	80	73	70	65	60	89	80	78	71	69	65	59	73	69	66	63	58	63	61	57	54	63	61	57	54	63	61	57	54	
	2	101	88	89	80	80	73	68	97	86	87	78	78	72	67	81	76	75	71	66	71	69	65	61	71	69	65	61	71	69	65	61	
	2.5	106	92	96	85	88	79	74	102	90	93	83	86	78	74	87	81	81	76	72	77	74	71	67	77	74	71	67	77	74	71	67	
	3	110	94	101	88	93	83	79	105	92	97	87	90	82	78	91	84	85	80	76	81	77	74	71	67	77	74	71	67	77	74	71	67
	4	114	97	107	93	100	88	84	110	95	103	91	97	87	83	96	88	91	85	81	86	82	80	76	77	74	71	67	77	74	71	67	
	5	117	99	111	95	105	92	88	112	97	107	94	102	90	87	99	91	96	88	85	90	85	83	79	77	74	71	67	77	74	71	67	
	7	121	102	116	99	112	96	93	116	100	112	97	108	94	92	103	94	100	92	90	94	89	87	83	79	77	74	71	67	77	74	71	67
10	123	103	120	101	117	99	97	118	102	115	100	112	98	96	107	96	104	95	93	97	92	91	87	83	79	77	74	71	67	77	74	71	67

配光曲線

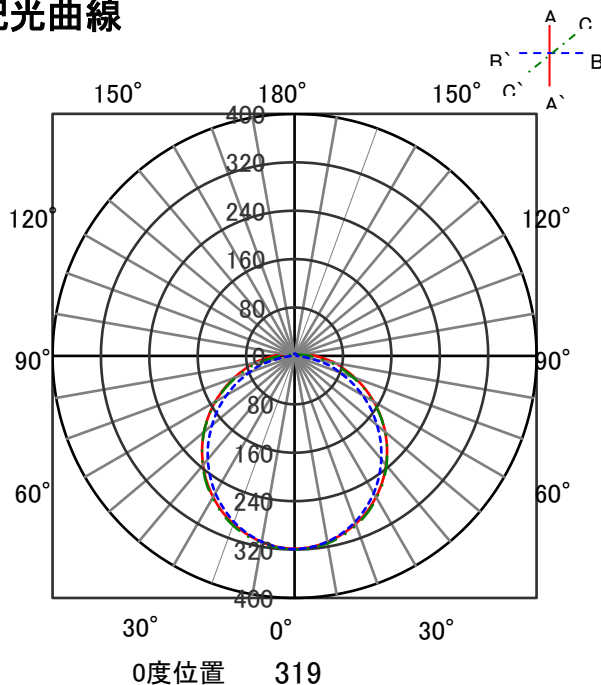

直射水平面照度

