


ECOHiLUX照明器具 配光データシート

意匠図

品名	LEDベースライト			保守率	
				良	0.83
				中	0.81
				否	0.77
セット品番	LX4-170-100W-TR110T			器具効率	
光源品番	LX4U170-100W-110T				
器具品番	LXBF-TR110T				
器具光束	10400 lm	最大取付間隔		上方向	4%
光源	LED	A-A	1.29 H	下方向	96%
光源光束	10400 lm	B-B	1.25 H	全方向	100%

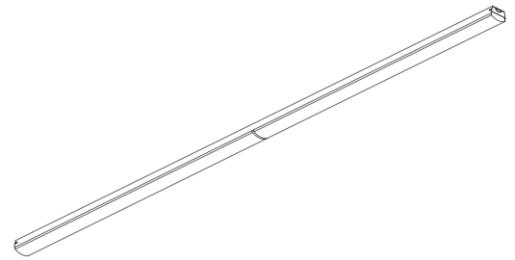


照明率表

作業面照明率(×0.01)

(反射率)	天井	80								70								50						30				0
		70		50		30		10		70		50		30		10		50		30		10		30		10		0
	壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30
室指数	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
	0.4	44	42	31	30	23	23	18	43	40	30	29	23	23	18	29	28	22	22	18	22	22	18	22	22	18	16	
	0.6	61	56	46	44	37	36	31	59	55	45	43	37	36	31	43	42	36	35	30	35	34	30	35	34	30	28	
	0.8	71	65	56	53	46	44	39	68	63	55	52	46	44	38	52	50	44	43	38	43	42	37	42	41	37	34	
	1	80	71	65	60	55	52	46	77	70	63	59	54	52	46	60	57	52	50	45	50	49	44	49	48	44	42	
	1.25	88	78	74	68	64	60	54	84	76	72	67	63	60	54	68	64	61	58	53	58	57	52	57	56	52	49	
	1.5	93	82	80	73	70	65	59	89	80	78	71	69	64	59	73	69	66	63	58	63	61	57	61	60	57	54	
	2	101	88	89	80	80	73	68	97	86	86	78	78	72	67	81	75	74	70	66	71	68	64	68	67	64	61	
	2.5	106	92	96	85	88	79	74	102	89	93	83	85	78	73	87	80	81	76	72	77	74	70	74	73	70	67	
	3	110	94	101	88	93	83	78	105	92	97	86	90	82	77	91	83	85	79	76	81	77	74	78	77	74	70	
	4	114	97	107	92	100	88	84	109	95	103	91	97	87	83	96	88	91	84	81	86	82	79	82	81	79	75	
	5	117	99	111	95	105	92	88	112	97	107	94	102	90	87	99	90	95	88	85	89	85	83	86	85	83	79	
	7	121	101	116	98	111	96	93	116	100	111	97	107	94	92	103	94	100	91	89	94	89	87	91	90	87	83	
	10	123	103	120	101	116	99	97	118	101	115	99	112	97	96	106	96	104	94	93	97	92	90	94	93	90	86	

配光曲線

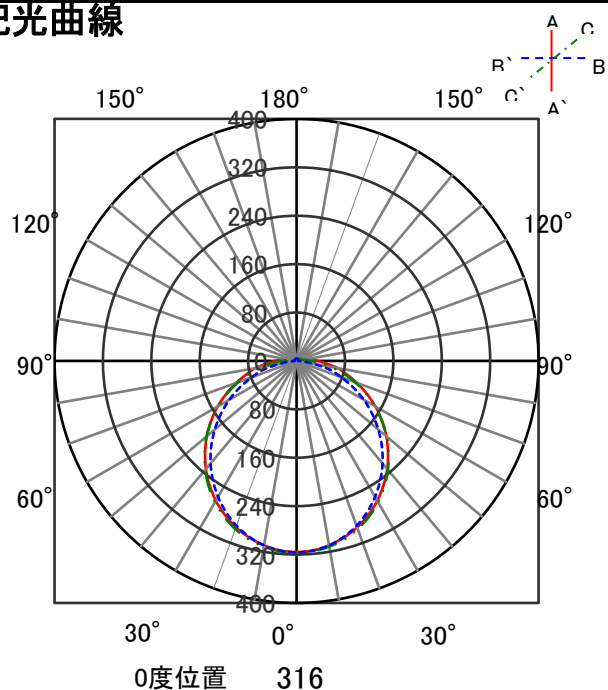

直射水平面照度

