


ECOHiLUX照明器具 配光データシート

意匠図


品名		LEDベースライト		保守率	
セット品番		LX4-190-69W-RTR40		良	0.83
光源品番		LX4U190-69W-40S		中	0.81
器具品番		LXBF-RTR40		否	0.77
				器具効率	
器具光束	6760 lm	最大取付間隔		上方向	2%
光源	LED	AA	1.29H	下方向	98%
光源光束	6900 lm	BB	1.25H	全方向	100%

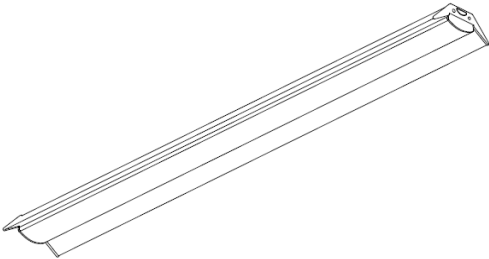

照明率表

作業面照明率(×0.01)																																					
(反射率%)	天井	80								70								50						30				0									
	壁	70				50				30				10				50				30				10				30				10			
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0								
室 指 数	0.4	45	42	32	31	24	24	19	44	41	31	30	24	24	19	30	29	24	23	19	23	23	19	23	23	19	23	19	17								
	0.6	62	57	48	45	39	38	32	60	56	47	45	39	37	32	45	43	38	37	32	37	36	32	37	36	32	37	36	30								
	0.8	73	66	58	54	48	46	40	70	64	56	53	47	46	40	54	52	46	45	40	45	44	39	45	44	39	45	44	37								
	1	81	73	67	62	57	54	48	79	71	65	61	56	54	48	63	59	55	53	48	53	52	47	53	52	47	53	52	45								
	1.25	90	80	76	70	67	63	57	87	78	74	69	66	62	57	71	67	63	61	56	61	60	55	61	60	55	61	60	53								
	1.5	95	84	82	75	73	68	62	92	82	80	74	71	67	62	76	71	69	66	61	66	64	60	66	64	60	66	64	57								
	2	103	89	92	82	83	76	71	99	88	89	81	81	75	70	84	78	78	73	69	75	72	68	75	72	68	75	72	65								
	2.5	108	93	98	87	91	82	77	104	92	96	86	88	81	76	90	83	84	79	75	81	77	74	81	77	74	81	77	71								
	3	112	96	103	90	96	85	81	107	94	100	89	93	84	81	94	86	89	83	79	85	81	78	85	81	78	85	81	75								
	4	116	99	109	94	103	91	87	112	97	106	93	100	90	86	99	91	95	88	85	90	86	83	90	86	83	90	86	83	80							
5	119	101	113	97	108	94	91	115	99	109	96	105	93	90	102	93	99	91	88	93	89	87	93	89	87	93	89	87	84								
7	122	103	118	100	114	98	96	118	101	114	99	110	97	95	106	96	103	94	93	97	92	91	97	92	91	97	92	91	88								
10	125	105	122	103	119	101	99	120	103	117	101	115	100	98	109	99	107	97	96	101	95	94	99	95	94	99	95	94	91								

配光曲線

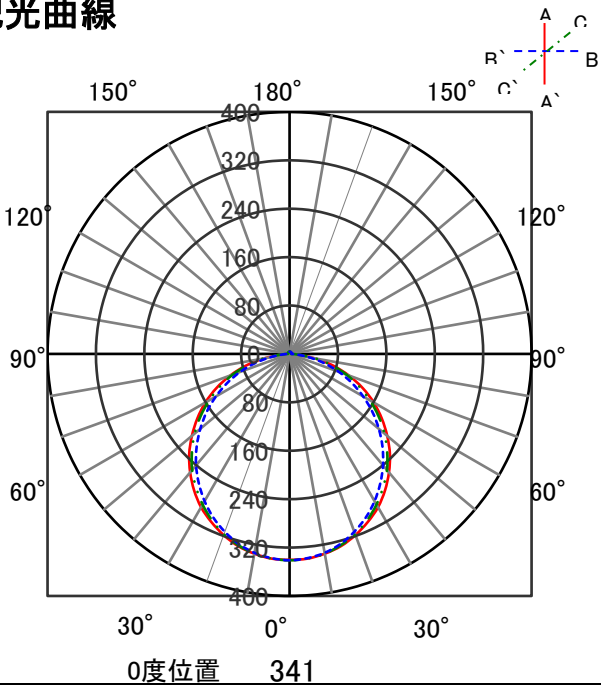

直射水平面照度

