

ECOHiLUX照明器具 配光データシート

意匠図


品名	LEDベースライト			保守率	
セット品番	LX4-190-69L-CH40-W250			良	0.83
光源品番	LX4U190-69L-40S			中	0.81
器具品番	LXBF-CH40-W250			否	0.77
器具光束	6485 lm	最大取付間隔		器具効率	
光源	LED	AA	1.32H	上方向	1%
光源光束	6485 lm	BB	1.63H	下方向	100%
				全方向	100%



照明率表

作業面照明率(×0.01)																																																																																																																																																																																																																																																																																																																								
反射率(%)	天井	80								70								50				30		0																																																																																																																																																																																																																																																																																																
		壁		70		50		30		10		70		50		30		10		50		30		10		30	10	0																																																																																																																																																																																																																																																																																												
		床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	10	30	10	0																																																																																																																																																																																																																																																																																											
室 指 数	0.4	45	42	31	30	24	23	19	44	41	31	30	23	23	19	30	29	23	23	18	23	22	18	17	0.6	62	57	47	45	38	37	31	60	55	46	44	38	36	31	44	43	37	36	31	36	35	31	29	0.8	72	65	57	53	47	45	39	69	64	55	52	46	45	39	53	51	45	44	39	44	43	38	36	1	80	72	66	61	56	53	47	78	70	64	60	55	52	47	61	58	53	51	46	52	51	46	43	1.25	89	79	75	69	65	61	55	86	77	73	68	64	60	55	70	66	62	59	54	60	58	54	51	1.5	94	83	81	73	71	66	60	91	81	79	72	70	65	60	75	70	67	64	59	65	63	58	56	2	102	88	90	80	81	74	68	98	87	88	79	79	73	68	83	77	76	72	67	73	70	66	64	2.5	107	92	97	86	88	80	75	103	91	94	84	86	79	74	89	82	83	77	73	79	76	72	70	3	110	95	101	89	94	84	79	106	93	98	88	91	83	78	93	85	87	81	77	83	79	76	73	4	115	98	108	93	101	89	85	111	96	104	92	98	88	84	98	89	93	86	83	88	84	81	79	5	118	100	112	96	106	92	89	114	98	108	95	103	91	88	101	92	97	89	87	92	87	85	82	7	122	102	117	99	112	96	94	117	101	113	98	109	95	93	105	96	102	93	91	96	91	89	86	10	124	104	121	102	117	100	98	120	103	116	101	113	99	97	109	98	106	96	95	100	94	93	90

配光曲線

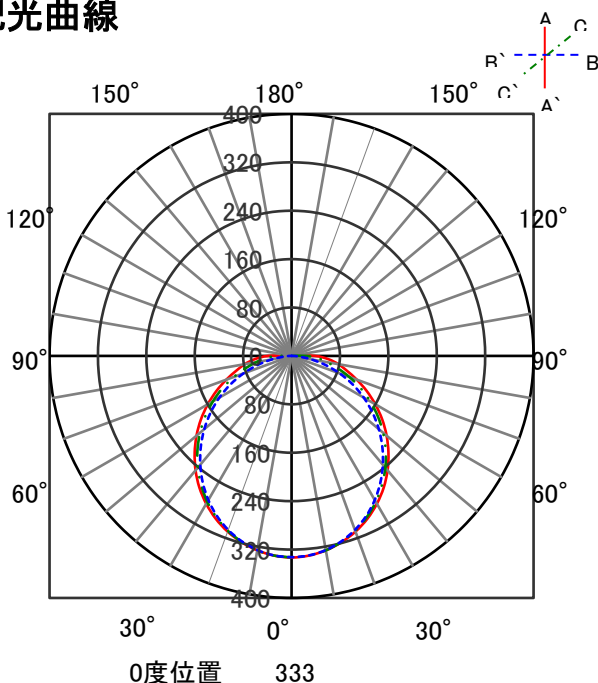

直射水平面照度

