


## ECOHiLUX照明器具 配光データシート

## 意匠図

| 品名    | LEDベースライト           |        |        | 保守率  |      |
|-------|---------------------|--------|--------|------|------|
|       |                     |        |        | 良    | 0.83 |
|       |                     |        |        | 中    | 0.81 |
|       |                     |        |        | 否    | 0.77 |
| セット品番 | LX4-190-100L-CL110T |        |        | 器具効率 |      |
| 光源品番  | LX4U190-100L-110T   |        |        |      |      |
| 器具品番  | LXBF-CL110T         |        |        |      |      |
| 器具光束  | 9590 lm             | 最大取付間隔 |        | 上方向  | 4%   |
| 光源    | LED                 | A-A    | 1.30 H | 下方向  | 96%  |
| 光源光束  | 9590 lm             | B-B    | 1.25 H | 全方向  | 100% |

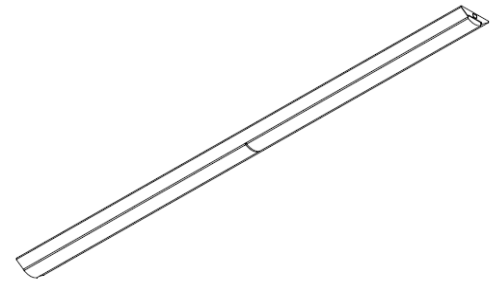


## 照明率表

作業面照明率(×0.01)

| 反射率<br>(%)  | 天井<br>壁<br>床 | 80  |     |     |     |     |    |    |     | 70  |     |     |     |    |    |     |    | 50  |    |    |    |    |    |    |    | 30 |    |    |    | 0 |
|-------------|--------------|-----|-----|-----|-----|-----|----|----|-----|-----|-----|-----|-----|----|----|-----|----|-----|----|----|----|----|----|----|----|----|----|----|----|---|
|             |              | 70  |     | 50  |     | 30  |    | 10 |     | 70  |     | 50  |     | 30 |    | 10  |    | 50  |    | 30 |    | 10 |    | 30 |    | 10 |    | 0  |    | 0 |
|             |              | 30  | 10  | 30  | 10  | 30  | 10 | 30 | 10  | 30  | 10  | 30  | 10  | 30 | 10 | 30  | 10 | 30  | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 0 |
| 室<br>指<br>数 | 0.4          | 44  | 42  | 31  | 30  | 23  | 23 | 18 | 43  | 41  | 30  | 29  | 23  | 23 | 18 | 29  | 28 | 23  | 22 | 18 | 22 | 22 | 18 | 22 | 22 | 18 | 16 |    |    |   |
|             | 0.6          | 61  | 56  | 46  | 44  | 38  | 36 | 31 | 59  | 55  | 45  | 43  | 37  | 36 | 31 | 44  | 42 | 36  | 35 | 31 | 35 | 35 | 30 | 35 | 35 | 30 | 28 |    |    |   |
|             | 0.8          | 71  | 65  | 56  | 53  | 46  | 45 | 39 | 69  | 63  | 55  | 52  | 46  | 44 | 38 | 52  | 50 | 44  | 43 | 38 | 43 | 42 | 37 | 42 | 42 | 37 | 35 |    |    |   |
|             | 1            | 80  | 72  | 65  | 60  | 55  | 52 | 46 | 77  | 70  | 63  | 59  | 54  | 52 | 46 | 60  | 57 | 52  | 50 | 45 | 51 | 49 | 45 | 45 | 45 | 42 | 42 |    |    |   |
|             | 1.25         | 88  | 78  | 74  | 68  | 64  | 60 | 55 | 85  | 76  | 72  | 67  | 63  | 60 | 54 | 68  | 64 | 61  | 58 | 53 | 59 | 57 | 52 | 52 | 49 | 49 | 49 |    |    |   |
|             | 1.5          | 93  | 82  | 80  | 73  | 70  | 65 | 60 | 89  | 80  | 78  | 71  | 69  | 65 | 59 | 73  | 69 | 66  | 63 | 58 | 63 | 61 | 57 | 54 | 54 | 54 | 54 |    |    |   |
|             | 2            | 101 | 88  | 89  | 80  | 80  | 73 | 68 | 97  | 86  | 87  | 78  | 78  | 72 | 67 | 81  | 76 | 75  | 71 | 66 | 71 | 69 | 65 | 61 | 61 | 61 | 61 |    |    |   |
|             | 2.5          | 106 | 92  | 96  | 85  | 88  | 79 | 74 | 102 | 90  | 93  | 83  | 86  | 78 | 74 | 87  | 81 | 81  | 76 | 72 | 77 | 74 | 71 | 67 | 67 | 67 | 67 |    |    |   |
|             | 3            | 110 | 94  | 101 | 88  | 93  | 83 | 79 | 105 | 92  | 97  | 87  | 90  | 82 | 78 | 91  | 84 | 85  | 80 | 76 | 81 | 77 | 74 | 71 | 67 | 67 | 67 |    |    |   |
|             | 4            | 114 | 97  | 107 | 93  | 100 | 88 | 84 | 110 | 95  | 103 | 91  | 97  | 87 | 83 | 96  | 88 | 91  | 85 | 81 | 86 | 82 | 80 | 76 | 71 | 67 | 67 |    |    |   |
|             | 5            | 117 | 99  | 111 | 95  | 105 | 92 | 88 | 112 | 97  | 107 | 94  | 102 | 90 | 87 | 99  | 91 | 96  | 88 | 85 | 90 | 85 | 83 | 79 | 71 | 67 | 67 |    |    |   |
|             | 7            | 121 | 102 | 116 | 99  | 112 | 96 | 93 | 116 | 100 | 112 | 97  | 108 | 94 | 92 | 103 | 94 | 100 | 92 | 90 | 94 | 89 | 87 | 83 | 79 | 71 | 67 |    |    |   |
|             | 10           | 123 | 103 | 120 | 101 | 117 | 99 | 97 | 118 | 102 | 115 | 100 | 112 | 98 | 96 | 107 | 96 | 104 | 95 | 93 | 97 | 92 | 91 | 87 | 83 | 79 | 71 |    |    |   |

## 配光曲線

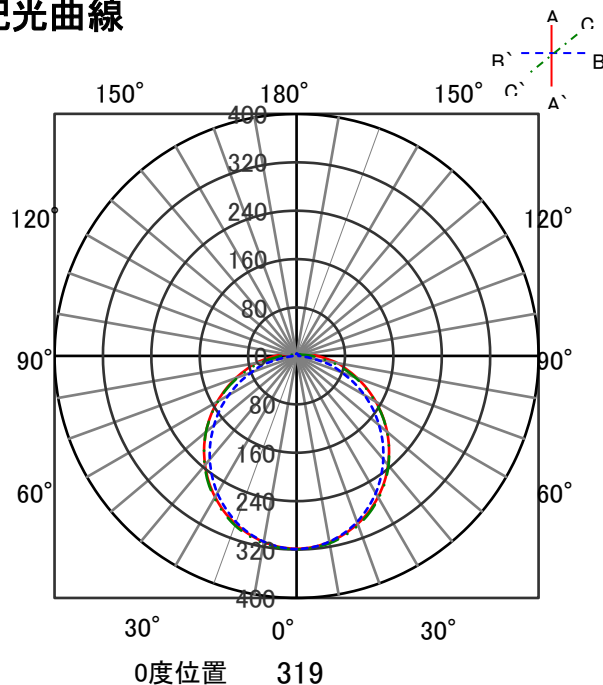

## 直射水平面照度

