


ECOHiLUX照明器具 配光データシート

意匠図


品名	LEDベースライト			保守率	
セット品番	LX4-190-32W-UK40-W328-LI			良	0.81
光源品番	LX4U190-32W-40S-LI			中	0.77
器具品番	LXBF-UK40-W328			否	0.68
器具光束	3235 lm	最大取付間隔		上方向	0%
光源	LED	AA	1.32H	下方向	100%
光源光束	3300 lm	BB	1.64H	全方向	100%

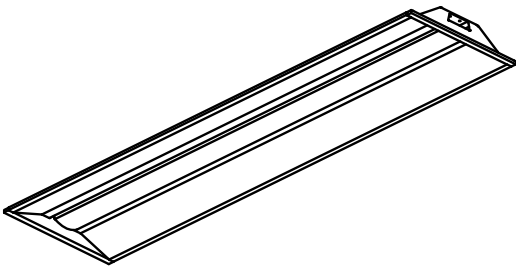

照明率表

作業面照明率(×0.01)																													
反射率	天井	80								70								50						30				0	
	壁	70			50			30		10	70			50			30		10	50			30		10	30			10
率	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	10	30	10	0
室 指 数	0.4	45	42	32	31	24	24	19	44	41	31	30	24	24	19	30	29	24	23	19	23	23	19	23	23	19	23	19	17
	0.6	62	57	48	45	39	38	32	61	56	47	45	38	37	32	45	44	38	37	32	37	36	32	37	36	32	37	32	30
	0.8	73	66	58	54	48	46	40	70	64	56	53	47	46	40	54	52	46	45	40	45	44	39	45	44	39	45	39	37
	1	81	73	67	62	57	54	48	79	71	65	61	56	54	48	63	59	55	53	48	53	52	47	53	52	47	53	47	45
	1.25	90	80	76	70	67	62	57	87	78	74	69	66	62	56	71	67	64	61	56	62	60	55	62	60	55	62	55	53
	1.5	95	84	82	75	73	68	62	92	82	80	74	71	67	62	76	72	69	66	61	67	65	60	67	65	60	67	60	58
	2	103	90	92	82	83	76	70	99	88	89	81	81	75	70	85	79	78	74	69	75	72	69	75	72	69	75	69	66
	2.5	108	93	99	87	91	82	77	104	92	96	86	89	81	77	91	84	85	79	76	81	78	75	81	78	75	81	75	72
	3	112	96	103	90	96	86	81	108	94	100	89	94	85	81	95	87	89	83	80	85	82	79	85	82	79	85	79	76
	4	116	99	109	95	103	91	87	112	98	106	94	100	90	87	100	91	95	88	85	91	87	84	91	87	84	91	84	81
	5	119	101	114	98	108	94	91	115	100	110	96	105	93	90	103	94	99	91	89	94	90	88	94	90	88	94	88	85
	7	123	103	118	101	114	98	96	118	102	114	100	111	97	95	107	97	104	95	93	99	93	92	99	93	92	99	92	89
10	126	105	122	103	119	101	100	121	104	118	102	115	100	99	110	100	108	98	97	102	96	95	102	96	95	102	95	92	

配光曲線

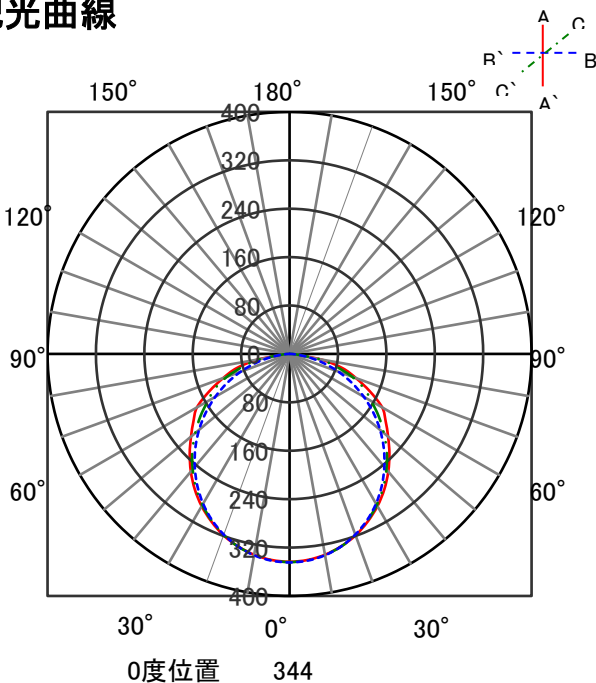

直射水平面照度

