


ECOHiLUX照明器具 配光データシート

意匠図

品名	LEDベースライト			保守率	
セット品番	LX4-190-64N-CL110WT-LI			良	0.83
光源品番	LX4U190-64N-110T-LI			中	0.81
器具品番	LXBF-CL110WT			否	0.77
器具光束	6600 lm	最大取付間隔		器具効率	
光源	LED	A-A	1.30 H	上方向	3%
光源光束	6600 lm	B-B	1.25 H	下方向	97%
				全方向	100%

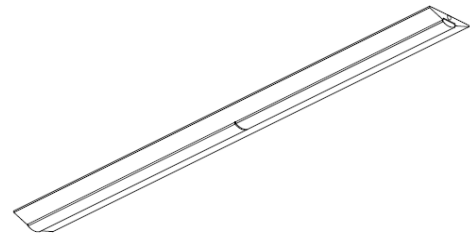


照明率表

作業面照明率(×0.01)

反 射 率 (%)	天井	80								70								50						30				0		
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	10	0			
室 指 数	0.4	44	42	31	30	23	23	18	43	41	30	29	23	23	18	29	28	22	22	18	22	22	18	22	22	18	16			
	0.6	61	56	46	44	37	36	31	59	55	45	43	37	36	31	44	42	36	35	30	35	34	30	35	34	30	28			
	0.8	71	65	56	53	46	44	38	69	63	55	52	46	44	38	52	50	44	43	38	43	42	37	35	38	43	42	35		
	1	80	72	65	60	55	52	46	77	70	63	59	54	52	46	60	57	52	50	45	51	49	44	42	45	51	49	44	42	
	1.25	88	78	74	68	64	60	54	85	76	72	67	63	60	54	68	64	61	58	53	58	57	52	49	58	57	52	49	49	
	1.5	93	82	80	73	70	65	59	89	80	78	71	69	64	59	73	69	66	63	58	63	61	57	54	63	61	57	54	54	
	2	101	88	89	80	80	73	68	97	86	87	78	78	72	67	81	76	75	70	66	71	69	65	61	71	69	65	61	61	
	2.5	106	92	96	85	88	79	74	102	90	93	83	85	78	73	87	81	81	76	72	77	74	71	67	77	74	71	67	67	
	3	110	94	101	88	93	83	78	105	92	97	87	90	82	78	91	84	85	80	76	81	77	74	71	81	77	74	71	71	71
	4	114	97	107	93	100	88	84	110	95	103	91	97	87	83	96	88	91	85	81	86	82	80	76	86	82	80	76	76	76
	5	117	99	111	95	105	92	88	113	97	107	94	102	90	87	100	91	96	88	85	90	85	83	79	90	85	83	79	79	79
	7	121	102	116	99	112	96	93	116	100	112	97	108	94	92	104	94	100	92	90	94	89	87	84	94	89	87	84	84	84
10	124	103	120	101	117	99	97	118	102	115	100	112	98	96	107	97	104	95	93	98	92	91	87	98	92	91	87	87	87	

配光曲線

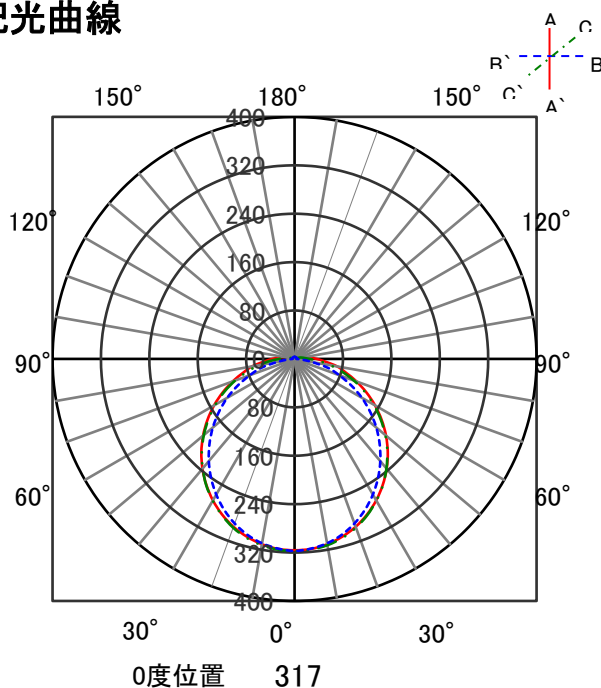

直射水平面照度

