


品名	LEDベースライト			保守率	
				良	0.81
セット品番	LX4-190-100N-UK110T-W170-LI			中	0.77
光源品番	LX4U190-100N-110T-LI			否	0.68
器具品番	LXBF-UK110T-W170			器具効率	
器具光束	9690 lm	最大取付間隔		上方向	0%
光源	LED	A-A	1.34 H	下方向	100%
光源光束	10200 lm	B-B	1.25 H	全方向	100%

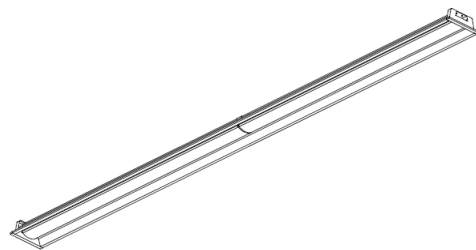

作業面照明率(×0.01)

(反 射 率) (%)	天井	80							70							50							30				0
		壁	70		50		30		10	70		50		30		10	50		30		10	30		10	0		
			床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0	
室 指 数	0.4	46	43	32	31	25	24	20	44	42	32	31	24	24	20	31	30	24	24	19	24	23	19	18			
	0.6	63	58	49	46	40	39	33	61	57	48	46	39	38	33	46	45	39	38	33	38	37	33	31			
	0.8	74	67	59	55	49	47	42	71	65	58	55	49	47	41	56	53	48	46	41	47	46	41	39			
	1	83	74	68	63	59	56	50	80	73	67	63	58	55	50	64	61	56	54	49	55	54	49	47			
	1.25	91	81	78	71	69	64	59	88	79	76	71	68	64	58	73	69	66	63	58	64	62	58	55			
	1.5	96	85	84	76	75	69	64	93	83	82	75	73	69	64	78	73	71	68	63	69	67	63	60			
	2	104	91	93	84	85	78	73	101	89	91	82	83	77	72	86	80	80	76	71	77	74	71	68			
	2.5	110	95	100	89	93	84	79	106	93	97	88	91	83	79	92	85	87	81	78	83	80	77	74			
	3	113	97	105	92	98	87	83	109	95	102	91	95	86	83	96	88	91	85	82	87	83	81	78			
	4	117	100	111	96	105	92	89	113	98	107	95	102	91	88	101	93	97	90	87	92	88	86	83			
	5	120	102	115	99	110	96	93	116	100	111	97	107	95	92	104	95	101	93	91	96	91	89	87			
	7	124	104	119	102	116	99	97	119	103	115	100	112	98	96	108	98	106	96	95	100	95	93	90			
10	126	105	123	104	120	102	101	121	104	119	103	116	101	100	111	100	109	99	98	103	97	96	93				

Figure 1 is a contour map showing the relationship between horizontal distance (horizontal axis) and depth (vertical axis). The horizontal axis ranges from 4m to 0m and back to 4m. The vertical axis ranges from 0m to 5m. Contour lines are labeled with values: 3500, 870, 390, 220, 140, and 96. The map is labeled "A - A'" on the left and "B - B'" on the right.