


ECOHiLUX照明器具 配光データシート

意匠図


品名	LEDベースライト			保守率	
セット品番	LX4-190-100WW-UK110T-W190-LI			良	0.81
				中	0.77
光源品番	LX4U190-100WW-110T-LI			否	0.68
器具品番	LXBF-UK110T-W190			器具効率	
器具光束	9690 lm	最大取付間隔		上方向	0%
光源	LED	AA	1.68H	下方向	100%
光源光束	9890 lm	BB	1.30H	全方向	100%

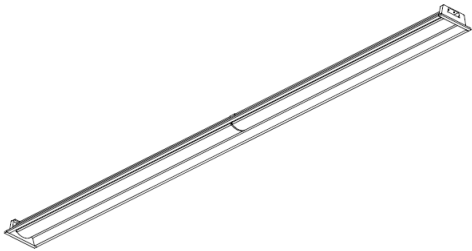

照明率表

作業面照明率(×0.01)																												
反射率 (%)	天井	80								70								50						30			0	
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	10	0	
室 指 数	0.4	46	43	32	31	24	24	19	44	42	32	30	24	24	19	31	30	24	24	19	24	23	19	18				
	0.6	63	58	48	46	40	38	33	61	57	48	45	39	38	33	46	44	38	38	33	38	37	33	31				
	0.8	73	67	58	55	49	47	41	71	65	57	54	48	47	41	55	53	47	46	41	46	45	40	38				
	1	82	74	68	63	58	55	49	79	72	66	62	57	55	49	64	60	56	54	49	54	53	48	46				
	1.25	91	81	77	71	68	64	58	88	79	76	70	67	63	58	72	68	65	62	57	63	61	57	55				
	1.5	96	85	83	76	74	69	63	93	83	81	75	73	68	63	78	73	70	67	62	68	66	62	59				
	2	104	90	93	83	84	77	72	100	89	90	82	83	76	72	86	80	80	75	71	77	74	70	68				
	2.5	109	94	100	88	92	83	79	105	93	97	87	90	82	78	92	85	86	81	77	83	79	76	74				
	3	113	97	104	91	97	87	83	109	95	101	90	95	86	82	96	88	91	84	81	87	83	80	78				
	4	117	100	110	96	105	92	89	113	98	107	94	102	91	88	101	92	97	89	87	92	88	85	83				
	5	120	102	114	98	109	95	92	116	100	111	97	106	94	92	104	95	101	93	90	96	91	89	86				
7	123	104	119	101	115	99	97	119	102	115	100	112	98	96	108	98	105	96	95	100	94	93	90					
10	126	105	123	104	120	102	101	121	104	119	103	116	101	100	111	100	109	99	98	103	97	96	93					

配光曲線

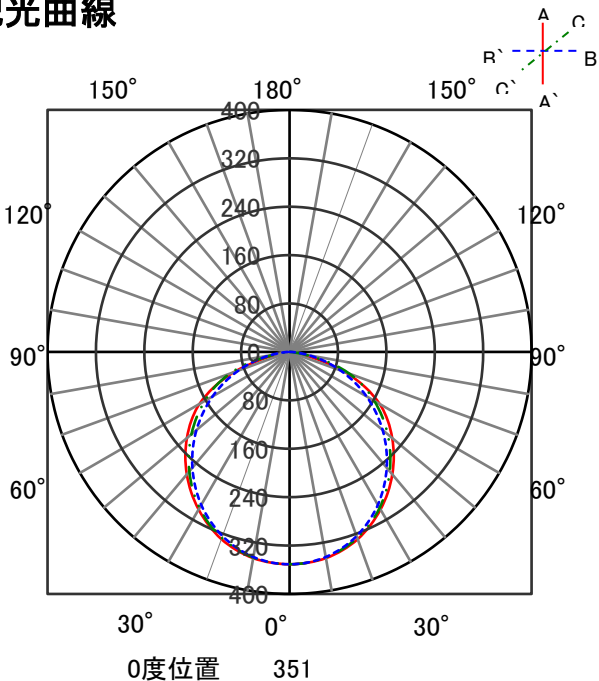

直射水平面照度

