


## ECOHiLUX照明器具 配光データシート

意匠図


| 品名    | LEDポーチ灯          |        |       | 保守率  |      |
|-------|------------------|--------|-------|------|------|
|       |                  |        |       | 良    | 0.69 |
|       |                  |        |       | 中    | 0.67 |
|       |                  |        |       | 否    | 0.63 |
| セット品番 | LBR5L-CIPL-BS-D  |        |       | 器具効率 |      |
| 光源品番  | LDF5L-H-GX53-D   |        |       |      |      |
| 器具品番  | LBR-GX53-CIPL-BS |        |       |      |      |
| 器具光束  | 405 lm           | 最大取付間隔 |       | 上方向  | 2%   |
| 光源    | LED              | AA     | 1.38H | 下方向  | 98%  |
| 光源光束  | 510 lm           | BB     | 1.38H | 全方向  | 100% |

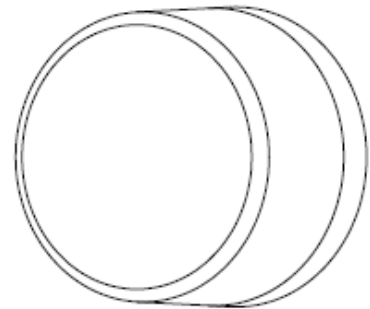

## 照明率表

| 作業面照明率(×0.01) |      |     |     |     |     |     |    |     |     |     |     |     |     |    |     |     |     |    |    |    |    |    |    |    |    |   |   |
|---------------|------|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|----|----|----|----|----|----|----|----|---|---|
| 反射率<br>(%)    | 天井   | 80  |     |     |     |     |    |     |     | 70  |     |     |     |    |     |     |     | 50 |    |    |    |    |    | 30 |    |   | 0 |
|               | 壁    | 70  |     |     | 50  |     | 30 |     | 10  | 70  |     | 50  |     | 30 |     | 10  | 50  |    | 30 |    | 10 | 30 |    | 10 | 0  |   |   |
|               | 床    | 30  | 10  | 30  | 10  | 30  | 10 | 10  | 30  | 10  | 30  | 10  | 30  | 10 | 10  | 30  | 10  | 30 | 10 | 10 | 30 | 10 | 10 | 30 | 10 | 0 |   |
| 室<br>指<br>数   | 0.4  | 42  | 40  | 28  | 27  | 21  | 20 | 16  | 41  | 39  | 28  | 27  | 20  | 20 | 15  | 27  | 26  | 20 | 20 | 15 | 20 | 19 | 15 | 14 |    |   |   |
|               | 0.6  | 58  | 53  | 43  | 41  | 33  | 32 | 27  | 56  | 52  | 42  | 40  | 33  | 32 | 27  | 40  | 39  | 32 | 31 | 26 | 31 | 31 | 26 | 24 |    |   |   |
|               | 0.8  | 68  | 62  | 52  | 49  | 42  | 40 | 34  | 66  | 60  | 51  | 48  | 41  | 40 | 34  | 49  | 47  | 40 | 39 | 33 | 39 | 38 | 33 | 31 |    |   |   |
|               | 1    | 77  | 69  | 61  | 57  | 50  | 48 | 41  | 74  | 67  | 59  | 56  | 50  | 47 | 41  | 57  | 54  | 48 | 46 | 41 | 47 | 45 | 40 | 38 |    |   |   |
|               | 1.25 | 85  | 75  | 70  | 64  | 59  | 56 | 49  | 82  | 73  | 68  | 63  | 58  | 55 | 49  | 65  | 61  | 56 | 54 | 48 | 54 | 53 | 48 | 45 |    |   |   |
|               | 1.5  | 90  | 79  | 76  | 69  | 66  | 61 | 54  | 87  | 77  | 74  | 68  | 64  | 60 | 54  | 70  | 66  | 62 | 59 | 53 | 59 | 57 | 53 | 50 |    |   |   |
|               | 2    | 98  | 85  | 86  | 77  | 76  | 69 | 63  | 94  | 83  | 83  | 75  | 74  | 68 | 62  | 78  | 73  | 71 | 67 | 61 | 68 | 65 | 61 | 58 |    |   |   |
|               | 2.5  | 104 | 90  | 93  | 82  | 83  | 75 | 69  | 100 | 88  | 90  | 80  | 81  | 74 | 69  | 84  | 78  | 77 | 72 | 68 | 74 | 71 | 67 | 64 |    |   |   |
|               | 3    | 107 | 92  | 97  | 85  | 89  | 79 | 74  | 103 | 90  | 94  | 84  | 86  | 78 | 73  | 88  | 81  | 82 | 76 | 72 | 78 | 75 | 71 | 68 |    |   |   |
|               | 4    | 112 | 96  | 104 | 90  | 97  | 85 | 80  | 108 | 94  | 100 | 89  | 94  | 84 | 80  | 94  | 86  | 88 | 82 | 78 | 84 | 80 | 77 | 73 |    |   |   |
|               | 5    | 116 | 98  | 108 | 93  | 102 | 89 | 85  | 111 | 96  | 105 | 92  | 99  | 88 | 84  | 98  | 89  | 93 | 85 | 82 | 88 | 83 | 81 | 77 |    |   |   |
|               | 7    | 120 | 101 | 114 | 97  | 109 | 93 | 90  | 115 | 99  | 110 | 95  | 105 | 92 | 89  | 102 | 93  | 99 | 90 | 87 | 93 | 88 | 86 | 82 |    |   |   |
| 10            | 123  | 103 | 118 | 100 | 114 | 97  | 95 | 118 | 101 | 114 | 98  | 110 | 96  | 94 | 106 | 96  | 103 | 94 | 92 | 97 | 91 | 90 | 86 |    |    |   |   |

## 配光曲線

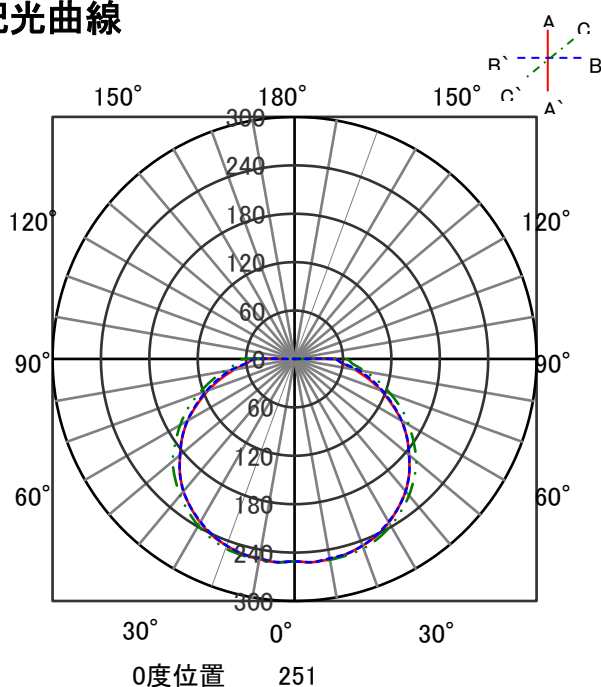

## 直射水平面照度

