


# ECOHiLUX照明器具 配光データシート

## 意匠図


器具品名	グレアレスダウンライト	保守率	
器具品番	DL3L309-5G4W-D	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	300lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

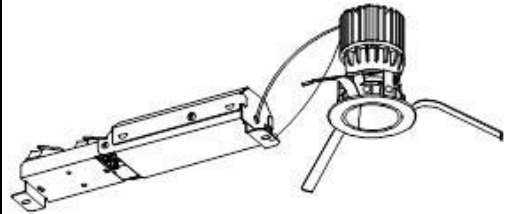

## 照明率表

		作業面照明率(×0.01)																																
反射率	天井	80								70								50								30								0
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0						
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0			
室 指 数	0.4	68	64	57	55	51	50	47	67	63	57	55	51	50	47	56	54	51	50	47	50	50	47	46										
	0.6	87	80	77	73	70	68	65	85	79	76	72	70	68	65	75	72	69	68	65	69	67	65	63										
	0.8	97	88	87	82	81	77	74	95	87	86	81	80	77	74	84	80	79	77	74	78	76	74	72										
	1	103	93	94	87	87	83	80	101	92	92	86	87	83	80	90	85	85	82	79	84	81	79	78										
	1.25	109	97	100	92	94	88	85	106	96	98	91	93	88	85	95	90	91	87	85	89	86	84	83										
	1.5	112	99	104	94	98	91	88	109	98	102	94	97	91	88	99	92	94	90	87	92	89	87	85										
	2	117	102	110	98	104	95	93	114	101	107	97	103	95	92	103	96	99	94	92	96	92	91	89										
	2.5	120	104	114	101	109	98	96	116	102	111	100	107	98	96	106	98	103	96	95	99	95	94	92										
	3	122	105	117	102	112	100	98	118	104	114	101	110	100	98	108	100	105	98	97	101	97	96	93										
	4	125	106	121	105	117	103	102	121	105	118	104	114	102	101	111	102	109	101	100	104	99	98	96										
5	127	107	124	106	121	105	104	123	106	120	105	117	104	103	113	103	111	102	102	106	101	100	98											
7	129	109	127	108	125	107	107	125	108	123	107	121	106	106	116	105	114	104	104	108	103	102	100											
10	131	110	129	109	128	109	109	126	108	125	108	124	108	108	117	106	117	106	106	110	104	104	101											

## 配光曲線

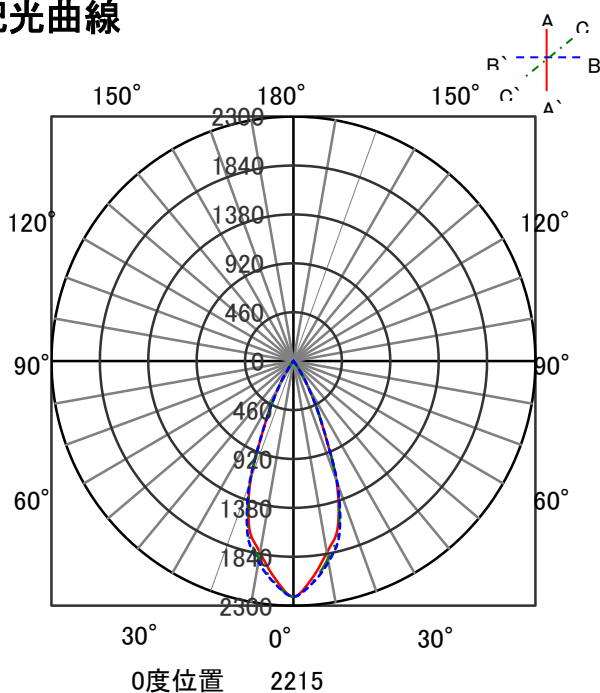

## 直射水平面照度

