


ECOHiLUX照明器具 配光データシート

意匠図

器具品名	棚下灯マルチコンパクト	保守率	
器具品番	KS75K40MC	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	685lm	器具効率	
光源	LED	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

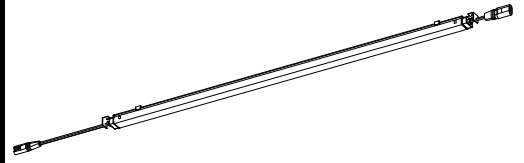


照明率表

作業面照明率(×0.01)

反(射率)	80								70								50				30				0					
	天井	70		50		30		10		70		50		30		10		50		30		10		30		10		0		
室	0.4	46	43	32	31	25	24	20	45	42	32	31	25	24	20	31	30	24	24	20	24	23	20	18						
指	0.6	63	58	49	46	40	39	34	61	57	48	46	40	39	34	46	44	39	38	33	38	37	33	31						
数	0.8	73	67	59	55	49	47	42	71	65	57	54	49	47	41	55	53	47	46	41	46	45	40	38						
	1	82	74	68	63	58	55	50	79	72	66	62	57	55	49	64	60	56	54	49	54	53	48	46						
	1.25	91	80	77	71	68	64	58	87	79	75	70	67	63	58	72	68	65	62	57	62	61	56	54						
	1.5	96	84	83	76	74	69	63	92	82	81	74	73	68	63	77	72	70	67	62	67	65	61	58						
	2	103	90	93	83	84	77	72	100	88	90	81	82	76	71	85	79	79	74	70	75	73	69	66						
	2.5	109	94	99	88	91	82	78	105	92	96	86	89	82	77	91	84	85	80	76	81	78	75	72						
	3	112	96	104	91	97	86	82	108	94	100	89	94	85	81	94	87	89	83	80	85	81	78	75						
	4	117	99	110	95	104	91	88	112	97	106	94	101	90	87	99	91	95	88	85	90	86	84	80						
	5	119	101	114	98	108	94	92	115	99	110	96	105	93	91	103	94	99	91	89	94	89	87	84						
	7	123	103	118	101	114	98	96	118	102	114	99	111	97	95	106	97	104	95	93	98	92	91	88						
	10	125	105	122	103	119	101	100	120	103	117	102	115	100	98	109	99	107	97	96	101	95	94	90						

配光曲線

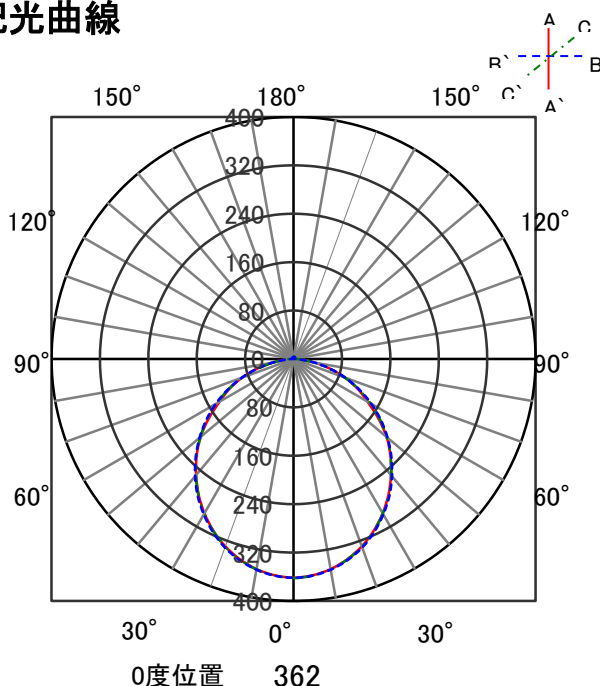

直射水平面照度

