


# ECOHiLUX照明器具 配光データシート

## 意匠図

器具品名	棚下灯マルチコンパクト	保守率	
器具品番	KS120K30MC	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	965lm	器具効率	
光源	LED	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

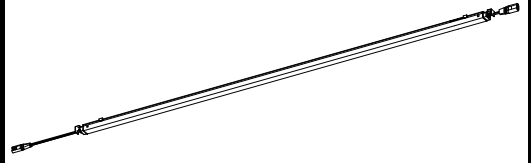


## 照明率表

作業面照明率(×0.01)

反(射率)	80								70								50				30				0							
	天井	70		50		30		10		天井	70		50		30		10		天井	50		30		10		天井	30		10		天井	0
0.4	46	43	32	31	25	24	20	44	42	32	30	24	24	20	31	30	24	24	19	23	23	19	18									
0.6	63	58	48	46	40	38	33	61	56	47	45	39	38	33	46	44	38	37	33	37	37	32	30									
0.8	73	66	58	55	49	47	41	71	65	57	54	48	46	41	55	52	47	45	40	46	45	40	38									
1	82	73	67	63	58	55	49	79	72	66	62	57	54	49	63	60	55	53	48	54	52	48	45									
1.25	90	80	77	70	67	63	57	87	78	75	69	66	63	57	71	67	64	61	56	62	60	56	53									
1.5	95	84	83	75	73	68	63	92	82	81	74	72	67	62	77	72	69	66	61	67	65	61	58									
2	103	90	92	82	83	76	71	99	88	89	81	82	75	70	85	79	78	74	69	75	72	68	66									
2.5	108	93	99	87	91	82	77	104	92	96	86	89	81	77	90	84	85	79	76	81	78	74	71									
3	112	96	103	90	96	86	81	108	94	100	89	94	85	81	94	87	89	83	79	85	81	78	75									
4	116	99	109	95	103	91	87	112	97	106	93	100	90	86	99	91	95	88	85	90	86	83	80									
5	119	101	113	97	108	94	91	115	99	109	96	105	93	90	102	93	99	91	88	93	89	87	83									
7	122	103	118	100	114	98	96	118	101	114	99	110	97	95	106	96	103	94	93	97	92	91	87									
10	125	105	122	103	119	101	99	120	103	117	101	115	100	98	109	99	107	97	96	101	95	94	90									

## 配光曲線

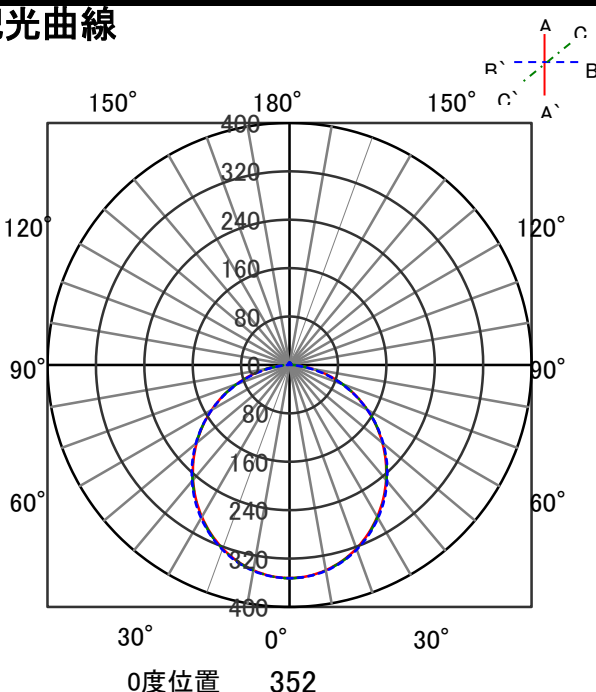

## 直射水平面照度

