


ECOHiLUX照明器具 配光データシート


器具品名	グレアレスダウンライト	保守率	
器具品番	UV5L309-10G3W-D	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	430lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

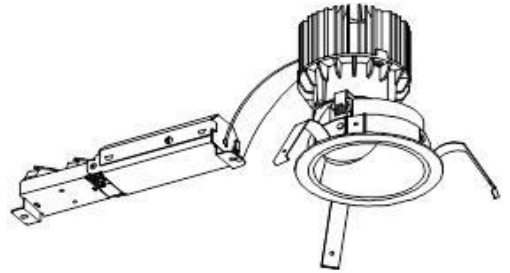

照明率表

反射率		作業面照明率(×0.01)																																															
		天井								80								70								50								30								0							
		壁		70		50		30		10		70		50		30		10		50		30		10		30		10		0																			
室 指 数	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10						
	0.4	68	64	57	55	51	50	47	67	63	57	55	51	50	47	56	54	50	50	47	50	49	47	45																									
	0.6	87	80	77	73	70	68	65	86	79	76	72	70	68	65	75	72	69	67	65	68	67	64	63																									
	0.8	97	89	87	82	81	77	74	96	88	86	81	80	77	74	84	80	79	77	74	78	76	74	72																									
	1	104	93	94	87	88	83	80	102	92	93	87	87	83	80	90	86	85	82	79	84	82	79	78																									
	1.25	110	97	101	92	94	89	86	107	96	99	92	93	88	85	96	90	91	87	85	89	87	84	83																									
	1.5	113	100	105	95	99	92	89	110	99	103	94	97	91	89	99	93	95	90	88	92	89	87	86																									
	2	118	103	111	99	105	96	94	115	102	108	98	103	95	93	104	97	100	94	92	97	93	91	90																									
	2.5	121	105	115	102	110	99	97	118	104	112	101	108	98	96	107	99	104	97	95	100	96	94	92																									
	3	124	106	118	103	113	101	99	120	105	115	103	111	101	99	109	101	106	99	98	102	98	96	94																									
4	127	108	122	106	119	104	103	123	107	119	105	116	103	102	113	103	110	102	101	105	100	99	97																										
5	129	109	125	107	122	106	105	124	108	121	106	119	105	104	115	105	113	104	103	107	102	101	99																										
7	131	110	128	109	126	108	108	126	109	124	108	122	108	107	117	106	116	106	105	110	104	103	101																										
10	133	111	131	111	130	110	110	128	110	127	109	125	109	109	119	107	118	107	107	111	105	105	102																										

配光曲線

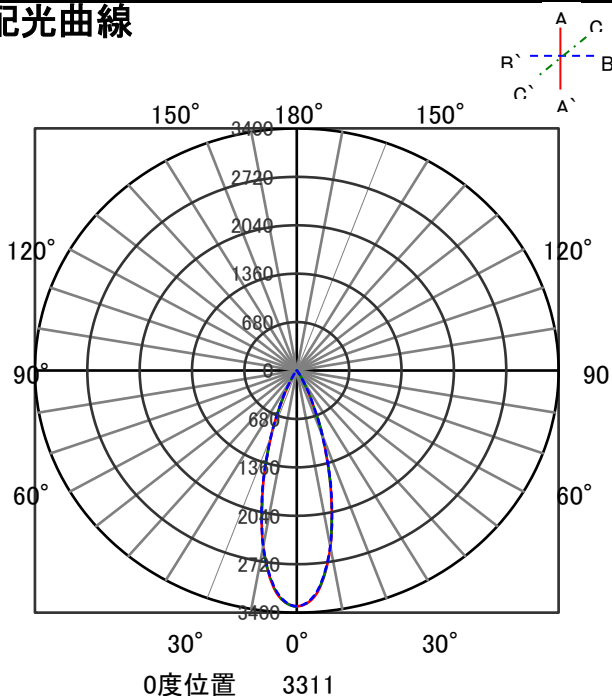

直射水平面照度

