


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	グレアレスユニバーサル ダウンライト	保守率	
器具品番	UV3L309-5G2W-D	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	350lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

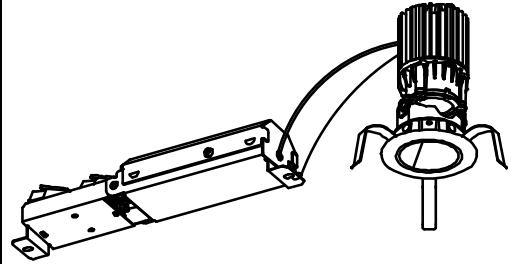

照明率表

		作業面照明率(×0.01)																											
反 射 率	天井	80								70								50				30				0			
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0	
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	30	10	10	30	10	30	10
室 指 数	0.4	69	64	58	56	51	50	47	68	64	57	55	51	50	47	56	55	51	50	47	51	50	47	46					
	0.6	88	81	78	74	71	69	65	87	80	77	73	71	69	65	75	72	70	68	65	69	68	65	64					
	0.8	99	90	88	83	82	78	75	97	89	87	82	81	78	75	85	81	80	78	75	79	77	74	73					
	1	105	95	95	89	89	84	81	103	94	94	88	88	84	81	92	87	86	83	80	85	83	80	79					
	1.25	111	99	102	94	96	90	87	109	98	100	93	94	89	86	97	92	92	88	86	90	88	85	84					
	1.5	115	101	106	97	100	93	90	112	100	104	96	99	92	90	101	94	96	92	89	94	91	88	87					
	2	120	104	112	101	107	97	95	116	103	110	100	105	97	94	106	98	101	96	94	98	95	93	91					
	2.5	123	106	117	103	112	101	98	120	105	114	102	109	100	98	109	101	105	99	97	101	97	96	94					
	3	125	108	120	105	115	103	101	122	106	117	104	113	102	100	111	102	108	101	99	104	99	98	96					
	4	129	109	124	107	120	106	104	124	108	121	106	117	105	103	114	105	112	103	102	107	102	101	98					
5	131	110	127	109	124	108	106	126	109	123	108	120	107	106	116	106	114	105	104	109	103	103	100						
7	133	112	130	111	128	110	109	128	111	126	110	124	109	108	119	108	117	107	107	111	105	105	102						
10	135	113	133	112	131	112	111	130	111	129	111	127	111	110	121	109	120	109	108	113	107	107	104						

配光曲線

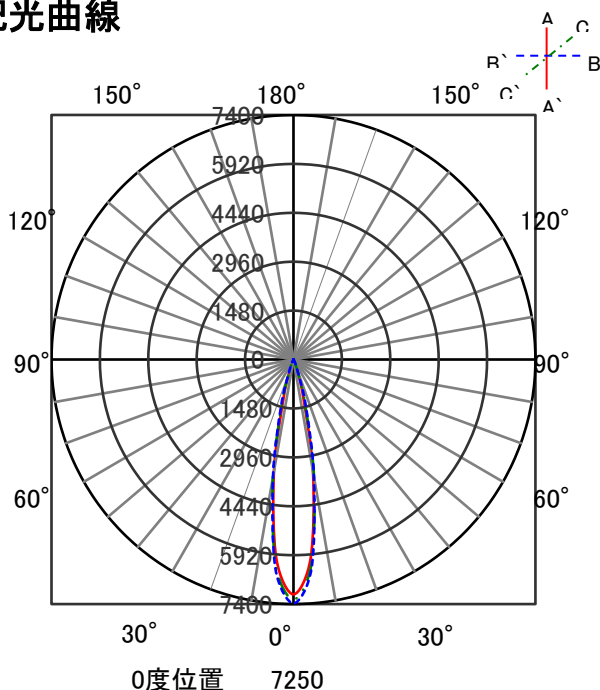

直射水平面照度

