

# ECOHiLUX照明器具 配光データシート

## 意匠図


器具品名	小型シーリングライト	保守率	
器具品番	NSE25-GX53S	良	0.67
部品品名	-	中	0.63
部品品番	-	否	0.56
器具光束	410lm	器具効率	
光源	LDF8L-H-GX53-V2	上方向	8%
光源光束	700lm	下方向	51%
		全方向	59%



## 照明率表

		作業面照明率(×0.01)																											
反射率	天井	80								70				50				30				0							
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0	
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
室 指 数	0.4	43	40	30	29	22	22	18	41	39	29	28	22	21	17	27	26	21	20	16	20	19	16	13					
	0.6	59	54	44	42	36	34	29	56	52	43	41	35	34	29	40	38	33	32	28	31	31	26	23					
	0.8	69	62	54	50	44	42	37	65	60	52	49	43	41	36	48	46	41	39	34	38	37	33	29					
	1	77	69	62	58	53	50	44	73	66	60	56	51	49	43	56	53	48	46	41	45	44	40	36					
	1.25	85	75	71	65	61	58	52	81	73	68	63	60	56	51	63	60	56	54	49	52	51	47	42					
	1.5	90	79	77	70	67	63	57	85	76	74	68	65	61	56	68	64	61	58	53	57	55	51	46					
	2	98	85	86	77	77	70	65	93	82	82	75	74	69	64	76	70	69	65	61	64	62	58	53					
	2.5	103	89	93	82	85	76	71	98	86	89	80	81	74	70	81	75	75	70	66	70	67	63	58					
	3	106	91	97	85	90	80	75	101	88	93	83	86	78	74	85	78	79	74	70	73	70	67	61					
	4	111	94	104	90	97	85	81	105	91	99	87	93	83	79	90	82	85	79	76	78	74	72	66					
5	114	97	108	92	102	89	85	108	93	102	90	97	86	83	93	85	89	82	79	81	77	75	69						
7	118	99	113	96	108	93	90	111	96	107	93	103	90	88	97	88	94	86	84	85	81	79	73						
10	120	101	117	98	113	96	94	114	98	111	96	108	94	92	100	90	98	89	87	89	84	83	76						

## 配光曲線

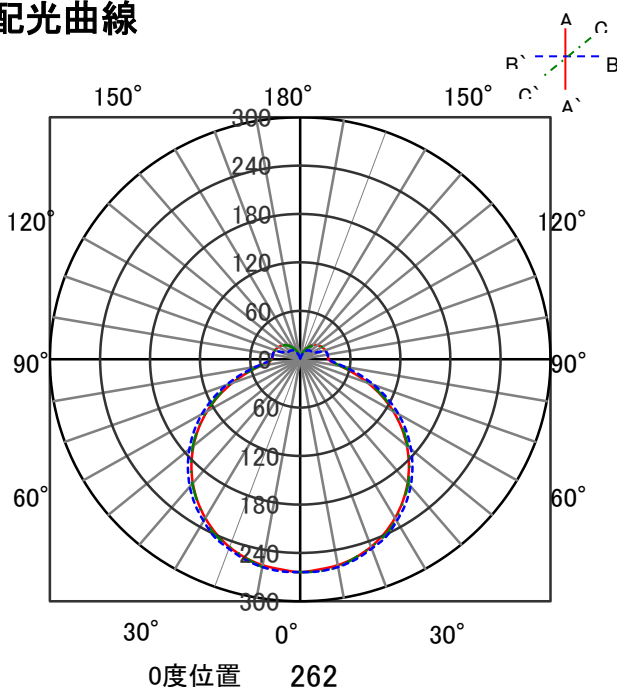

## 直射水平面照度

