


# ECOHiLUX照明器具 配光データシート

## 意匠図


器具品名	フロストガラス スポットライト1灯(プラグ)	保守率	
器具品番	SPIS-1E17R	良	0.67
部品品名	-	中	0.63
部品品番	-	否	0.56
器具光束	459lm	器具効率	
光源	LDG5L-H-E17-WP	上方向	10%
光源光束	540lm	下方向	75%
		全方向	85%

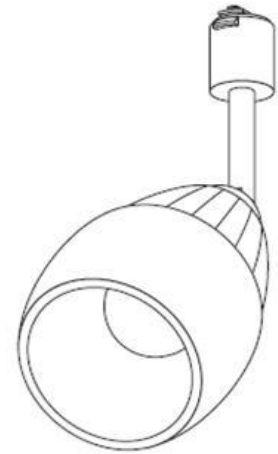

## 照明率表

		作業面照明率(×0.01)																								
反射率	天井	80								70				50				30				0				
	壁	70	10	30	10	30	10	30	10	70	10	30	10	30	10	50	10	30	10	30	10	30	10	30	10	30
室 指 数	0.4	44	41	30	29	23	23	18	42	40	30	29	23	22	18	28	27	22	21	17	21	20	17	14		
	0.6	59	54	44	42	35	34	28	56	52	42	41	34	33	28	40	38	33	32	27	31	30	26	23		
	0.8	69	63	54	51	44	43	37	66	60	52	49	43	42	36	49	47	41	40	35	39	38	34	30		
	1	77	69	62	58	52	49	43	73	66	60	56	51	48	42	56	53	48	46	41	45	44	40	36		
	1.25	84	75	70	64	60	56	50	80	72	68	62	58	55	49	63	59	55	53	47	52	50	46	42		
	1.5	90	79	76	69	66	62	55	85	76	73	67	64	60	54	68	64	60	57	52	57	55	50	46		
	2	97	85	85	76	76	69	64	92	82	82	74	73	68	62	75	70	68	65	60	64	62	57	53		
	2.5	102	88	92	81	83	75	69	97	85	88	79	80	73	68	80	74	74	70	65	69	66	63	57		
	3	106	91	96	84	88	79	74	101	88	92	82	85	77	72	84	78	78	73	69	73	70	66	61		
	4	111	94	103	89	96	84	80	105	91	98	87	92	82	78	89	82	85	78	75	78	74	71	66		
5	114	96	107	92	101	88	84	108	94	102	89	96	86	82	93	85	89	81	78	81	77	75	69			
7	118	99	112	95	107	92	89	111	96	107	93	102	90	87	97	88	94	86	83	86	81	79	73			
10	121	101	116	98	113	96	93	114	98	111	96	107	93	91	100	91	98	89	87	89	85	83	77			

## 配光曲線

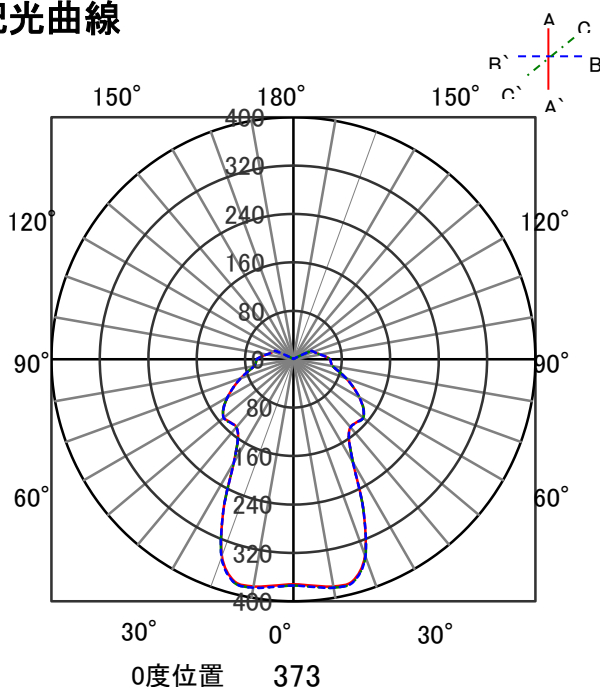

## 直射水平面照度

