

ECOHiLUX照明器具 配光データシート

意匠図




器具品名	ホーロー調(台形) ペンダント1灯(フランジ)	保守率	
器具品番	PLMSG-1E17F	良	0.67
部品品名	-	中	0.63
部品品番	-	否	0.56
器具光束	374lm	器具効率	
光源	LDG5L-H-E17-WP	上方向	0%
光源光束	540lm	下方向	69%
		全方向	69%

照明率表

		作業面照明率(×0.01)																											
反射率	天井	80								70				50				30				0							
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0	
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室 指 数	0.4	55	52	43	42	36	36	32	54	51	43	41	36	35	32	42	41	36	35	32	35	35	31	30					
	0.6	75	69	63	60	56	54	50	74	68	62	60	55	54	50	61	59	55	53	50	54	53	49	48					
	0.8	84	76	71	67	63	61	56	82	75	70	66	63	60	56	68	65	62	60	56	60	59	55	54					
	1	92	83	80	74	72	68	64	90	81	79	74	71	68	64	76	72	70	67	63	68	67	63	61					
	1.25	100	89	89	82	81	76	72	97	87	87	81	80	76	72	84	79	78	75	72	76	74	71	69					
	1.5	104	91	94	85	86	80	76	101	90	92	84	85	79	75	88	82	82	78	75	80	77	74	72					
	2	110	96	101	90	94	86	82	107	94	99	90	92	85	82	94	88	89	84	81	86	83	80	78					
	2.5	115	99	107	95	101	91	88	111	98	104	94	99	90	87	99	92	95	89	86	91	87	85	83					
	3	117	101	111	97	105	94	91	113	99	107	96	102	93	90	102	94	98	91	89	94	90	88	85					
	4	121	103	115	100	111	97	95	117	102	112	99	108	96	94	106	97	102	95	93	98	93	92	89					
5	123	104	119	102	115	100	98	119	103	115	101	111	99	97	108	99	106	97	96	100	95	94	91						
7	126	106	122	104	119	103	101	121	105	118	103	116	102	100	111	101	109	100	99	103	98	97	94						
10	128	107	125	106	123	105	104	123	106	121	105	119	104	103	113	102	112	102	101	105	100	99	96						

配光曲線

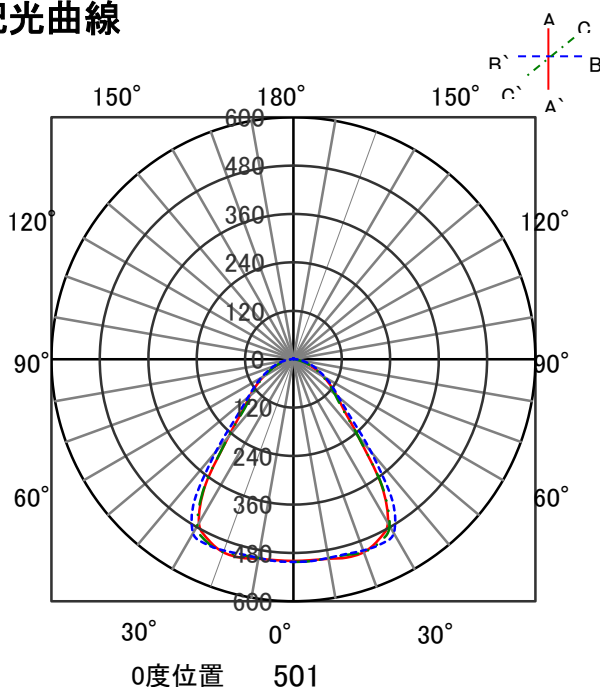

直射水平面照度

