


# ECOHiLUX照明器具 配光データシート

## 意匠図


器具品名	LED投光器	保守率	
器具品番	FL3M-180W-40-K30-R7	良	
部品品名	-	中	
部品品番	-	否	
		器具効率	
器具光束	25100lm	上方向	0%
光源	LED	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%



## 照明率表

作業面照明率(×0.01)																										
反射率	天井	80								70				50			30		0							
		壁		70		50		30		10		70		50		30		10		30		10		0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室 指 数	0.4	54	50	41	40	35	34	30	52	49	41	40	34	34	30	40	39	34	34	30	34	33	30	28		
	0.6	71	65	58	56	51	49	45	69	64	58	55	50	49	45	56	54	50	48	45	49	48	44	43		
	0.8	82	75	70	65	62	59	55	80	73	69	65	61	59	55	67	64	60	58	54	59	58	54	52		
	1	90	81	78	72	70	66	62	88	79	77	72	69	66	62	74	70	68	65	61	66	65	61	59		
	1.25	97	86	86	79	78	73	69	94	85	84	78	77	73	69	81	76	75	72	68	73	71	68	66		
	1.5	102	90	92	83	84	78	74	99	88	90	82	83	77	73	86	81	80	76	73	78	75	72	70		
	2	108	94	99	89	92	84	81	105	93	97	88	91	84	80	93	86	87	83	79	85	81	79	77		
	2.5	112	97	105	93	98	89	85	109	96	102	92	96	88	85	97	90	92	87	84	89	85	83	81		
	3	115	99	108	95	103	92	89	111	98	105	94	100	91	88	100	92	96	89	87	92	88	86	84		
	4	119	101	113	98	109	96	93	115	100	110	97	106	95	92	104	95	101	93	91	96	92	90	87		
5	121	103	117	100	113	98	96	117	101	113	99	109	97	95	107	97	104	95	94	99	94	92	90			
7	124	104	121	102	117	101	99	120	103	117	101	114	100	99	109	99	107	98	97	102	96	95	93			
10	126	105	124	104	121	103	102	121	104	119	103	117	102	101	112	101	110	100	99	104	98	98	95			

## 配光曲線

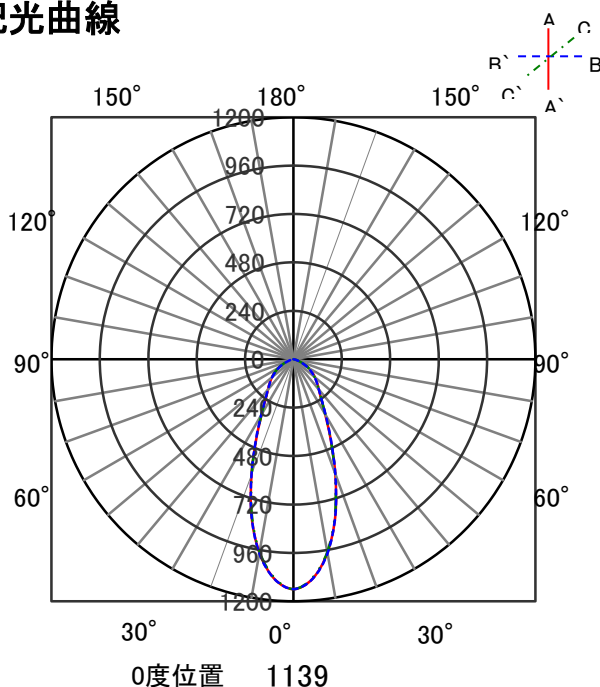

## 直射水平面照度

