


# ECOHiLUX照明器具 配光データシート

## 意匠図


器具品名	LED投光器	保守率	
器具品番	FL5M-300W-40-K30-R7	良	
部品品名	-	中	
部品品番	-	否	
		器具効率	
器具光束	41900lm	上方向	0%
光源	LED	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

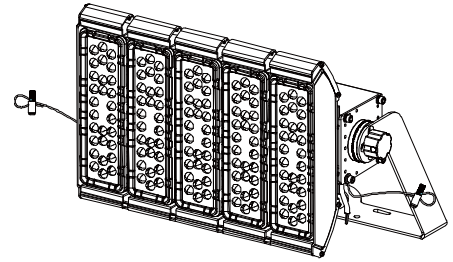

## 照明率表

		作業面照明率(×0.01)																						
反射率	天井	80								70				50			30		0					
	壁	70	50	30	10	70	50	30	10	50	30	10	30	10	0	30	10	0						
	床	30	10	30	10	30	10	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0		
室 指 数	0.4	54	51	42	40	35	34	30	53	50	41	40	35	34	30	40	39	34	34	30	34	34	30	29
	0.6	71	66	59	56	51	50	45	70	65	58	55	51	49	45	57	54	50	49	45	49	48	45	43
	0.8	83	75	70	66	62	60	55	80	74	69	65	62	59	55	67	64	60	59	55	59	58	54	53
	1	90	81	78	73	70	67	62	88	80	77	72	69	66	62	74	71	68	66	62	67	65	61	59
	1.25	97	86	86	79	78	74	69	95	85	85	78	77	73	69	81	77	75	72	69	73	71	68	66
	1.5	102	90	92	83	84	78	74	99	89	90	83	83	78	74	86	81	80	77	73	78	76	73	71
	2	108	94	100	89	93	85	81	105	93	97	88	91	84	81	93	86	88	83	80	85	82	79	77
	2.5	113	97	105	93	99	89	86	109	96	102	92	97	88	85	97	90	93	87	84	89	85	83	81
	3	115	99	109	95	103	92	89	112	98	106	94	101	91	88	100	92	96	90	87	92	88	86	84
	4	119	101	114	98	109	96	93	115	100	110	97	106	95	93	104	95	101	93	91	96	92	90	88
5	121	103	117	100	113	98	96	117	101	113	99	110	97	95	107	97	104	95	94	99	94	92	90	
7	124	104	121	103	117	101	99	120	103	117	101	114	100	99	110	99	107	98	97	102	96	95	93	
10	126	105	124	104	121	103	102	121	104	119	103	117	102	101	112	101	110	100	99	104	98	98	95	

## 配光曲線

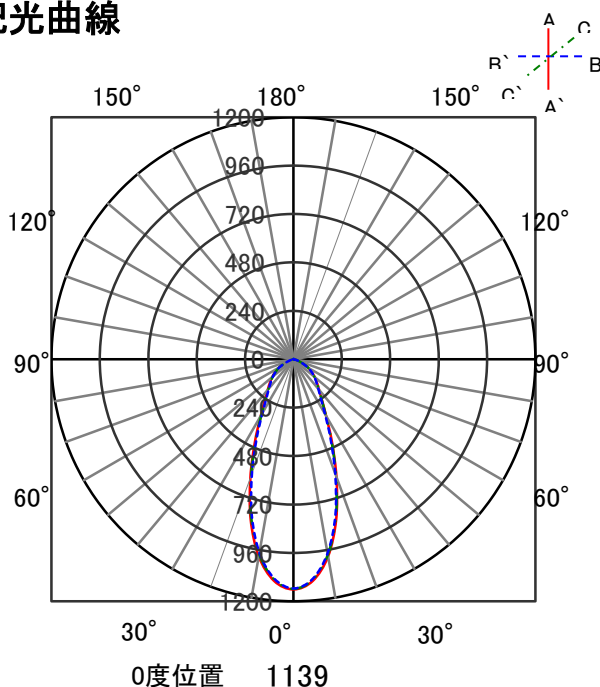

## 直射水平面照度

