


ECOHiLUX照明器具 配光データシート

意匠図

器具品名	ガーデンライト			保守率	
器具品番	TEE6-E17SIS TEE6-E17BIS			良	0.90
部品品名	LED電球			中	0.85
部品品番	LDA4L-G-E17-4T5			否	0.80
器具光束	440lm	最大取付間隔		器具効率	
光源	-	AA	-	上方向	38%
光源光束	-	BB	-	下方向	62%
				全方向	100%

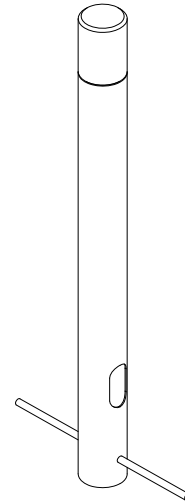


照明率表

作業面照明率(×0.01)

反(射率)	80								70								50				30				0							
	天井	70		50		30		10		天井	70		50		30		10		天井	50		30		10		天井	30		10		天井	0
室	0.4	37	35	24	23	16	16	12	34	32	22	21	15	15	11	19	18	13	13	9	11	11	8	4								
指	0.6	49	46	34	33	25	24	19	45	42	32	30	24	23	18	27	26	20	20	15	17	17	13	8								
数	0.8	59	53	43	40	33	31	25	54	49	40	38	31	29	23	34	32	26	25	20	22	22	17	12								
	1	66	59	50	47	40	38	31	60	55	47	43	37	35	29	40	37	32	31	25	27	26	22	15								
	1.25	73	65	58	53	47	44	37	67	60	54	50	44	41	35	45	43	38	36	31	32	31	26	19								
	1.5	78	69	64	58	53	49	42	72	64	59	54	49	46	40	50	47	42	40	35	36	35	30	22								
	2	86	75	73	65	62	57	50	79	70	67	61	58	53	47	57	53	50	47	42	42	40	36	27								
	2.5	92	79	79	70	70	63	56	84	74	73	66	65	59	53	62	57	55	52	47	47	45	41	31								
	3	95	82	84	74	75	67	61	87	76	78	69	70	63	57	66	60	59	55	51	50	48	44	34								
	4	101	86	91	79	83	73	67	92	80	84	74	77	69	64	71	65	65	61	56	55	53	49	38								
	5	104	88	96	82	88	77	72	95	83	88	77	82	73	68	75	68	70	64	60	59	56	53	41								
	7	108	91	102	86	96	82	78	99	85	94	81	88	78	74	79	72	75	69	66	63	60	58	45								
	10	112	93	107	90	102	87	83	102	88	98	85	94	82	79	83	75	80	72	70	67	64	62	49								

配光曲線

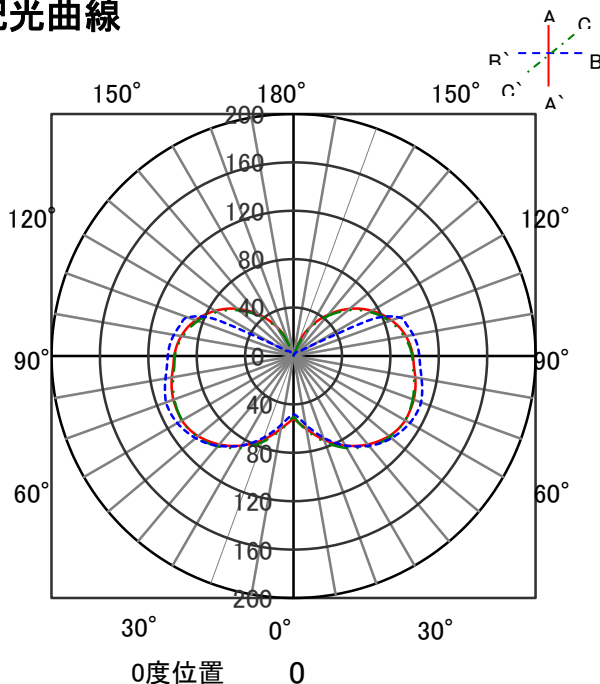

直射水平面照度

