


ECOHiLUX照明器具 配光データシート

意匠図

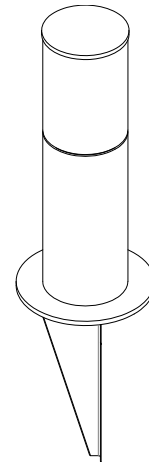


器具品名	ガーデンライト			保守率	
器具品番	TEES-E17KS TEES-E17KB			良	0.90
部品品名	LED電球			中	0.85
部品品番	LDA4L-G-E17-4T5			否	0.80
器具光束	440lm	最大取付間隔		器具効率	
光源	-	AA	6.88H	上方向	44%
光源光束	-	BB	6.96H	下方向	56%
				全方向	100%

照明率表

作業面照明率(×0.01)

反(射率)	80								70								50				30		0	
	天井	70		50		30		10		天井	70		50		30		10		壁	30		10		0
床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	0
室 指 数	0.4	36	33	23	22	15	15	10	33	31	21	20	14	14	10	17	17	11	11	8	9	9	6	2
	0.6	47	44	32	31	23	22	17	43	40	29	28	21	20	15	24	23	17	17	12	14	14	10	5
	0.8	56	51	40	38	30	29	22	51	47	37	35	28	27	21	30	29	23	22	17	18	18	14	7
	1	63	57	47	44	37	35	28	57	52	43	41	34	32	26	36	34	28	27	22	23	22	17	10
	1.25	70	62	55	50	44	41	34	64	57	50	46	40	38	31	41	39	33	32	26	27	26	22	13
	1.5	76	67	61	55	49	46	39	68	61	55	51	45	43	36	46	43	38	36	30	31	30	25	16
	2	83	73	70	62	59	54	47	75	67	64	58	54	50	43	52	49	45	42	37	37	35	31	21
	2.5	89	77	76	67	66	59	53	80	71	70	62	61	55	49	57	53	50	47	42	41	39	35	24
	3	93	79	81	71	71	64	57	84	73	74	66	66	59	54	61	56	55	51	46	45	43	39	27
	4	98	83	88	76	80	70	64	89	77	80	71	73	65	60	66	61	61	56	52	50	47	44	31
5	101	86	93	80	85	74	69	92	80	85	74	78	69	65	70	64	65	60	56	53	51	47	34	
7	106	89	99	84	93	80	75	96	83	90	78	85	74	70	75	68	70	64	61	58	55	52	39	
10	109	91	104	88	99	84	81	99	85	95	82	91	79	76	79	71	75	68	66	62	58	56	42	

配光曲線

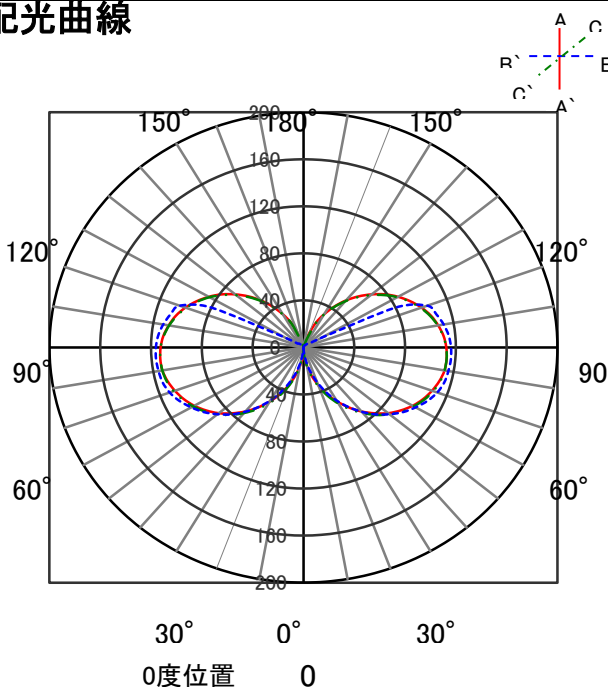

直射水平面照度

